Air Live®
Powered by OvisLink Corp.

SNMP-24MGB

24+8 Combo Pure Gigabit
SNMP Managed Switch

User's Manual

Copyright & Disclaimer

No part of this publication may be reproduced in any form or by any means, whether electronic, mechanical, photocopying, or recording without the written consent of OvisLink Corp.

OvisLink Corp. has made the best effort to ensure the accuracy of the information in this user's guide. However, we are not liable for the inaccuracies or errors in this guide. Please use with caution. All information is subject to change without notice

All Trademarks are properties of their respective holders.

Table of Contents

1. Introduction 1

1.1 Overview 1

1.2 How to Use This Guide 1

1.3 Firmware Upgrade and Tech Support 2

1.4 Features 3

2. Installing the SNMP-24MGB 5

2.2 Before You Start 5

2.3 Package Content 5

2.4 Optional Accessories 6

2.5 Knowing your SNMP-24MGB 7

2.6 Hardware Installation 7

2.6.1 Attaching Rubber Feet 7
2.6.2 Rack-mounted Installation 8
2.6.3 Power On 9

2.7 LED Table 9

3. Configuring the SNMP-24MGB 11

3.1 Important Information 11

3.2 Prepare your PC 11

3.3 Management Interface 12

3.4 Introduction to Web Management 15

3.4.1 Getting into Web Management 15

4. Web Management in SNMP-24MGB 17

4.1 Menu Structure of SNMP-24MGB 17

4.2 System 19

4.2.1 IP Configuration 19
4.2.2 Account Configuration 21
4.2.3 Time Configuration 22
4.2.4 IP Configuration 24
4.2.5 Loop Detection 27
4.2.6 Management Policy 28
4.2.7 System Log 31
4.2.8 Virtual Stack 32

4.3 Port 34
4.3.1 Port Configuration 34
4.3.2 Port Status 36
4.3.3 Simple Counter 40
4.3.4 Detail Counter 42
4.3.5 Power Saving 45
4.4 VLAN 46
4.4.1 VLAN Mode 46
4.4.2 Tag-based Group 47
4.4.3 Port-based Group 49
4.4.4 Ports 51
4.4.5 Port Isolation 52
4.4.6 Management 53
4.5 MAC 54
4.5.1 Mac Address Table 54
4.5.2 Static Filter 56
4.5.3 Static Forward 56
4.5.4 MAC Alias 57
4.5.5 MAC Table 58
4.6 GVRP 59
4.6.1 GVRP Configuration 60
4.6.2 GVRP Counter 62
4.6.3 GVRP VLAN Group Information 64
4.7 QoS 65
4.7.1 Port QoS Configuration 65
4.7.2 QoS Control List 67
4.7.3 Rate Limiters 72
4.7.4 Storm Control 74
4.7.5 Wizard 75
4.8 SNMP 84
4.9 ACL 86
4.9.1 ACL Ports Configuration 86
4.9.2 ACL Rate Limiter Configuration 88
4.9.3 Access Control List 89
4.9.4 Wizard 119
4.10 IP MAC Binding 127
4.10.1 IP MAC Binding Configuration 127
4.10.2 IP MAC Binding Dynamic Entry 128
4.11 802.1X Configuration 129
4.11.1 Server 133

4.11.2 Port Configuration 135
4.11.3 802.1X Status 137
4.11.4 802.1X Statistics 138
4.12 Trunking Configuration 139
4.12.1 Trunking Port Setting/Port 140
4.12.2 Aggregation View 142
4.12.3 LACP system Priority 143
4.13 STP Configuration 144
4.13.1 STP Status 144
4.13.2 STP Configuration 146
4.13.3 STP Port Configuration 148
4.14 MSTP 151
4.14.1 MSTP Status 151
4.14.2 MSTP Region Config 152
4.14.3 Instant View 152
4.15 Mirror 159
4.16 Multicast 161
4.16.1 IGMP Mode 161
4.16.2 IGMP Proxy 162
4.16.3 IGMP Snooping 163
4.16.4 IGMP Membership 164
4.16.5 MVR 165
4.16.6 MVID 166
4.16.7 Group Allow 167
4.16.8 MVR Group Membership 168
4.17 Alarm Configuration 169
4.17.1 Event 170
4.17.2 Email 171
4.18 DHCP Snooping 172
4.18.1 DHCP Snooping State 172
4.18.2 DHCP Snooping Entry 173
4.18.3 DHCP Snooping Client 174
4.19 Save / Store 175
4.19.1 Factory Default 176
4.19.2 Save Start 176
4.19.3 Save user 177
4.19.4 Restore user 177
4.20 Export / Import 178
4.21 Diagnostics 179

4.21.1 Diag 179
4.21.2 Ping 180
4.22 Maintenance 181
4.22.1 Reset Device 181
4.22.2 Software Upload 181
4.23 Logout 182
5. CLI Management in SNMP-24MGB 183
5.1 Connecting to the Console Port 183
5.2 Login in the Console Interface 183
5.3 Command of CLI 185
5.3.1 Global Command of CLI 186
5.3.2 Local Command of CLI 193
6. Troubleshooting 309
6.1 Incorrect connections 309
6.2 Diagnosing LED Indicators 310
6.3 Cabling 310
7. Specifications 311
8. Network Glossary 314

1 Introduction

1.1 Overview

The SNMP-24MGB is a 24-port Gigabit L2+ Managed Switch with 8-Port Gigabit TP/SFP slots and 16-Port Gigabit SFP slots. This Switch can be used to build high-performance switched workgroup networks. The switch can be managed through RS-232 serial port via directly connection, or through Ethernet port using CLI or Web-based management unit, associated with SNMP agent. In addition, the switch features comprehensive and useful functions such as QoS, Spanning Tree, VLAN, Port Trunking, Bandwidth Control, Port Security, SNMP/RMON, IGMP Snooping capability via the intelligent software. It is suitable for both metro-LAN and office applications.

Note:

The switch was for using indoor purpose, if it was used in outdoor environment or connect with cable to outdoor then it must to use a lightning arrester to protect the switch.

1.2 How to Use This Guide

SNMP-24MGB is a SNMP managed Switch with many functions. It is recommended that you read through the entire user's guide whenever possible. The user guide is divided into different chapters. You should read at least go through the first 2 chapters before attempting to install the device.

Recommended Reading

Chapter 1: This chapter explains the basic information for SNMP-24MGB. It is a must read.

Chapter 2: This chapter is about hardware installation. You should read through the entire chapter.

Chapter 3:

- **3.1 Important Information**: This section has information of default setting such as

IP, Username, and Password.

- **3.3 Management Interface**: This section introduces Web management, and Console management.
- **3.4 Introduction to Web Management**: This section tells you how to get into the WebUI using HTTP.

Chapter 4: This chapter explains all of the management functions via Web management.

Chapter 5: This chapter explains all of the management functions via CLI.

Chapter 6: If any trouble in using SNMP-24MGB, you can refer to this chapter

Chapter 7: This chapter shows technical specification of SNMP-24MGB.

Chapter 8: Explanation on network technical terms from A to Z. Highly recommended for reference when you encounter an unfamiliar term.

1.3 Firmware Upgrade and Tech Support

If you encounter a technical issue that can not be resolved by information on this guide, we recommend that you visit our comprehensive website support at www.airlive.com. The tech support FAQ are frequently updated with latest information.

In addition, you might find new firmwares that either increase software functions or provide bug fixes for SNMP-24MGB. You can reach our on-line support center at the following link:
http://www.airlive.com/support/support_2.jsp

Since 2009, AirLive has added the “Newsletter Instant Support System” on our website. AirLive Newsletter subscribers receives instant email notifications when there are new download or tech support FAQ updates for their subscribed airlive models. To become an AirLive newsletter member, please visit: http://www.airlive.com/member/member_3.jsp

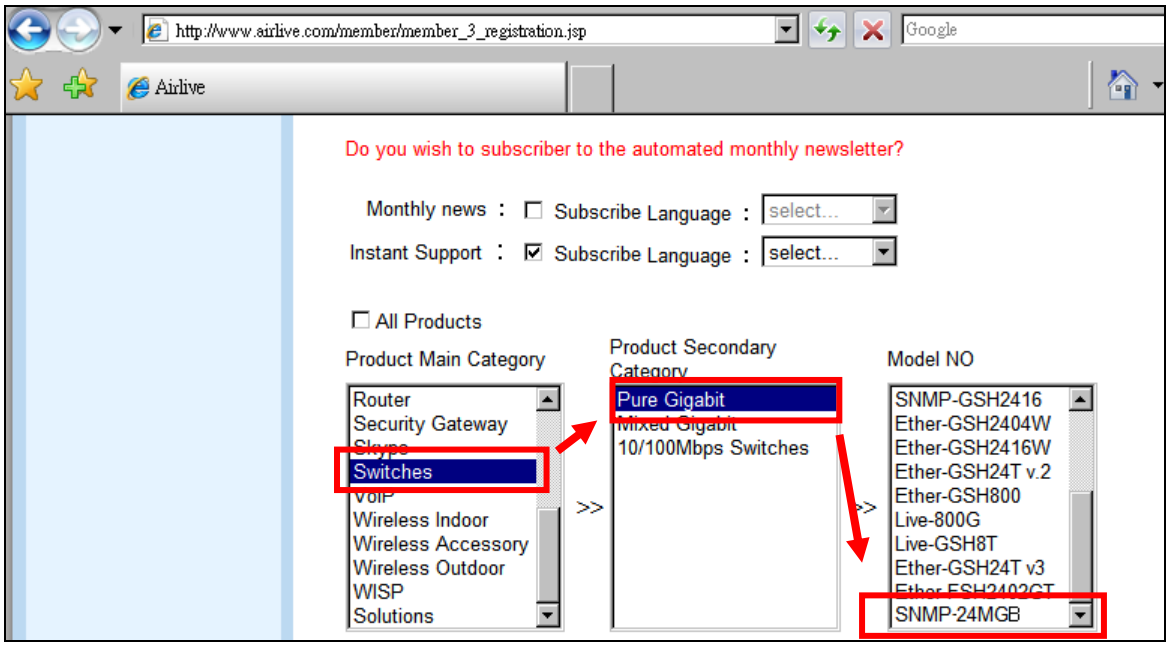

1.4 Features

- Confirms to IEEE802.3 10BASE-T, 802.3u 100BASE-TX, 802.3ab 1000BASE-T, 802.3z Gigabit fiber
- 16 x Mini-GBIC ports + 8 x 1000Base-T/Mini-GBIC ports (Combo) for Optional Fiber Connection
- High back-plane bandwidth 48Gbps
- 8K entry MAC address table and 4K VLAN support
- Power Saving with "ActiPHY Power Management" and "PerfectReach Power Management" techniques.
- IEEE802.1Q Q-in-Q nested VLAN support
- Supports concisely the status of port and easily port configuration
- Supports per port traffic monitoring counters
- Supports a snapshot of the system Information when you login
- Supports port mirror function
- Supports the static trunk function
- Supports 802.1Q VLAN
- Supports user management and limits three users to login
- Maximal packet length can be up to 9600 bytes for jumbo frame application
- Supports DHCP Broadcasting Suppression to avoid network suspended or crashed
- Supports to send the trap event while monitored events happened

- Supports default configuration which can be restored to overwrite the current configuration which is working on via web browser and CLI
- Supports on-line plug/unplug SFP modules
- Supports Quality of Service (QoS) for real time applications based on the information taken from Layer 2 to Layer 4, such as VoIP
- Built-in web-based management and CLI management, providing a more convenient UI for the user
- Supports port mirror function with ingress/egress traffic
- Supports rapid spanning tree (802.1w RSTP), multiple spanning tree (802.1s MSTP)
- Supports 802.1X port security on a VLAN
- Supports IP-MAC-Port Binding for LAN security
- Supports user management and only first login administrator can configure the device. The rest of users can only view the switch
- SNMP access can be disabled and prevent from illegal SNMP access
- Supports Ingress, Non-unicast and Egress Bandwidth rating management with a resolution of 1Mbps
- The trap event and alarm message can be transferred via e-mail
- Supports diagnostics to let administrator knowing the hardware status
- Supports loop detection to protect the switch crash when the networking has looping issue
- HTTP and TFTP for firmware upgrade, system log upload and configuration file import/export
- Supports remote boot the device through user interface and SNMP
- Supports NTP network time synchronization and daylight saving
- Supports 120 event log records in the main memory and display on the local console

2 Installing the SNMP-24MGB

This chapter describes the hardware features and the hardware installation procedure for the SNMP-24MGB. For software configuration, please go to chapter 3 for more details.

2.2 Before You Start

It is important to read through this section before you install the SNMP-24MGB.

- The maximum cabling distance is 100 meters.
- Do not create a network loop.
- Always check the LED lights for troubleshooting

2.3 Package Content

Unpack the contents of the SNMP-24MGB and verify them against the checklist below.

- One unit of SNMP-24MGB
- Power Cord
- Four Rubber Feet
- RS-232 cable
- User Guide (CD-ROM)
- Quick Installation Guide
- Rack-mounted Kit

SNMP-24MGB

Power Cord

Four Rubber Feet



RS-232 cable

User Guide (CD-ROM)

Quick Installation Guide

Rack-mounted Kit

Compare the contents of your SNMP-24MGB package with the standard checklist above. If any item is missing or damaged, please contact your local dealer for service.

2.4 Optional Accessories

The SNMP-24MGB has the following optional accessories which you can purchase from AirLive

- 1000Base-SX MiniGBIC Transceiver (*Model: SFP-SX*) or 1000Base-LX MiniGBIC Transceiver (*Model: SFP-LX-10*) is for your SFP slots of SNMP-24MGB, it allows you to use fiber cable for extending transmission distance.

Note: While installing MiniGBIC into SFP slot of SNMP-24MGB, please notice the direction of MiniGBIC is correct, and make sure that MiniGBIC is indeed installed in the SNMP-24MGB.

2.5 Knowing your SNMP-24MGB

Below are descriptions and diagrams of the product:

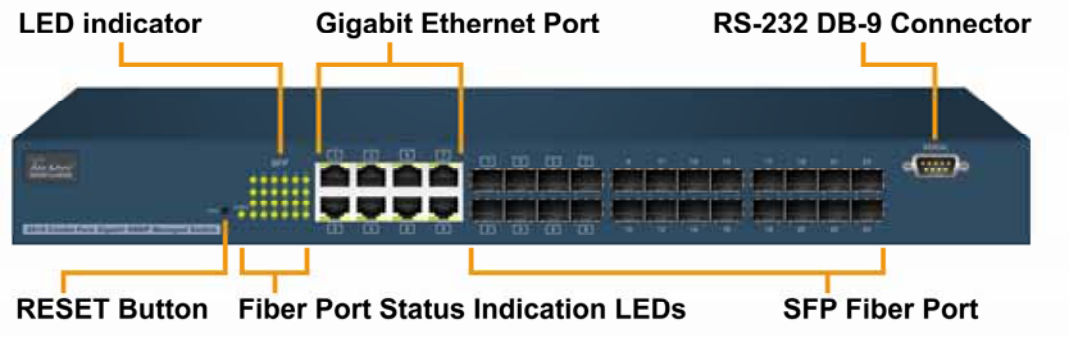

2.6 Hardware Installation

Set the SNMP-24MGB on a sufficiently large flat space with a power outlet nearby. The surface where you put your SNMP-24MGB should be clean, smooth, level and sturdy. Make sure there is enough clearance around the SNMP-24MGB to allow attachment of cables, power cord and allow air circulation.

2.6.1 Attaching Rubber Feet

A. Make sure mounting surface on the bottom of the SNMP-24MGB is grease and dust free.

B. Remove adhesive backing from your Rubber Feet.

C. Apply the Rubber Feet to each corner on the bottom of the SNMP-24MGB. These footpads can prevent the Switch from shock/vibration.

2.6.2 Rack-mounted Installation

The SNMP-24MGB comes with a rack-mounted kid and can be mounted in an EIA standard size, 19-inch Rack. The SNMP-24MGB can be placed in a wiring closet with other equipment. Perform the following steps to rack mount the SNMP-24MGB:

A. Position one bracket to align with the holes on one side of the SNMP-24MGB and secure it with the smaller bracket screws. Then attach the remaining bracket to the other side of the SNMP-24MGB.

B. After attached mounting brackets, position the SNMP-24MGB in the rack by lining up the holes in the brackets with the appropriate holes on the rack. Secure the SNMP-24MGB to the rack with a screwdriver and the rack-mounting screws.

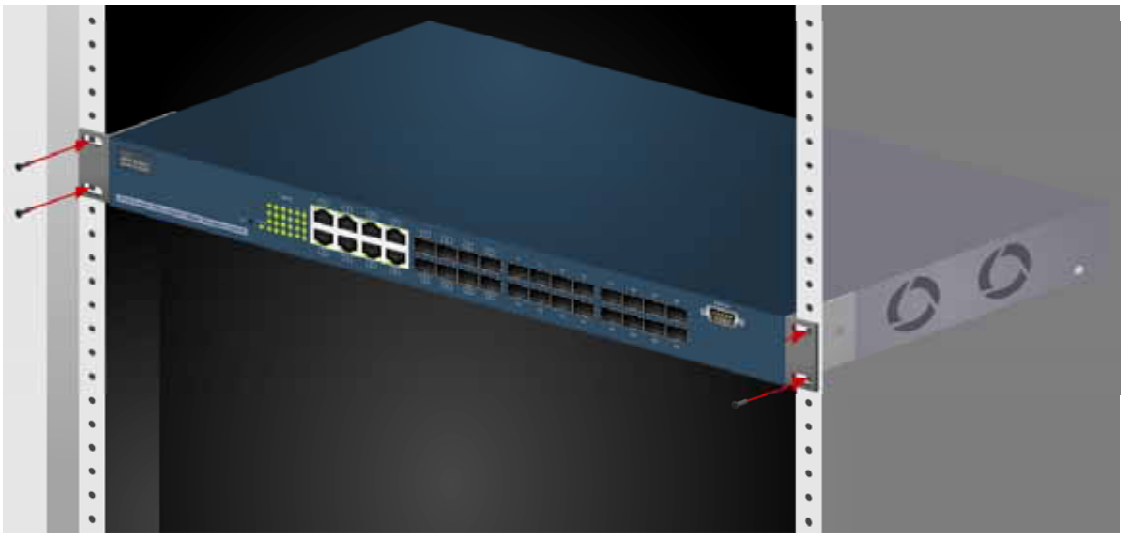

Note: For proper ventilation, allow about at least 4 inches (10 cm) of clearance on the front and 3.4 inches (8 cm) on the back of the Switch. This is especially important for enclosed rack installation.

2.6.3 Power On

Connect the power cord to the power socket on the rear panel of the SNMP-24MGB. The other side of power cord connects to the power outlet. The internal power supply of the SNMP-24MGB works with voltage range of AC in the 100-240VAC, frequency 50~60Hz. Check the power indicator on the front panel to see if power is properly supplied.

2.7 LED Table

The LED Indicators gives real-time information of systematic operation status. The following table provides descriptions of LED status and their meaning.

LED	Status	Description
Power	Green	Power On
	Off	Power is not connected
LNK/ACT	Green	The port is connecting with the device.
	Blink	The port is receiving or transmitting data.
	Off	No device attached.
10/100/1000Mbps	Green	In 1000Mbps connection speed
	Orange	In 100Mbps connection speed
	Off	In half-duplex mode
SFP(LINK/ACT)	Green	The port is connecting with the device.
	Blink	The port is receiving or transmitting data.
	Off	Module connection is not good

3 Configuring the SNMP-24MGB

The SNMP-24MGB offers many different types of management interface. You can configure through web browser (http), console (terminal), CLI. In this chapter, we will explain SNMP-24MGB's available management interfaces and how to get into them. Then, we will provide the introduction on Web Management and recommended initial settings. For detail explanations on Web Management functions, please go to Chapter 4. For Console interface, please go to Chapter 5.

3.1 Important Information

The following information will help you to get start quickly. However, we recommend you to read through the entire manual before you start. Please note the username and password are case sensitive.

- ❑ The default IP address is **192.168.1.1**
- ❑ The default Subnet Mask is **255.255.255.0**
- ❑ The default Gateway is **192.168.1.254**
- ❑ The default username is **admin**
- ❑ The default password is **airlive**

3.2 Prepare your PC

The SNMP-24MGB can be managed remotely by a PC through RJ-45 cable. The default IP address of the SNMP-24MGB is **192.168.1.1** with a *subnet mask* of 255.255.255.0. This means the IP address of the PC should be in the range of 192.168.1.2 to 192.168.1.253.

To prepare your PC for management with the SNMP-24MGB, please do the following:

1. Connect your PC directly to the copper port of SNMP-24MGB

2. Set your PC's IP address manually to 192.168.1.100 (or other address in the same subnet)

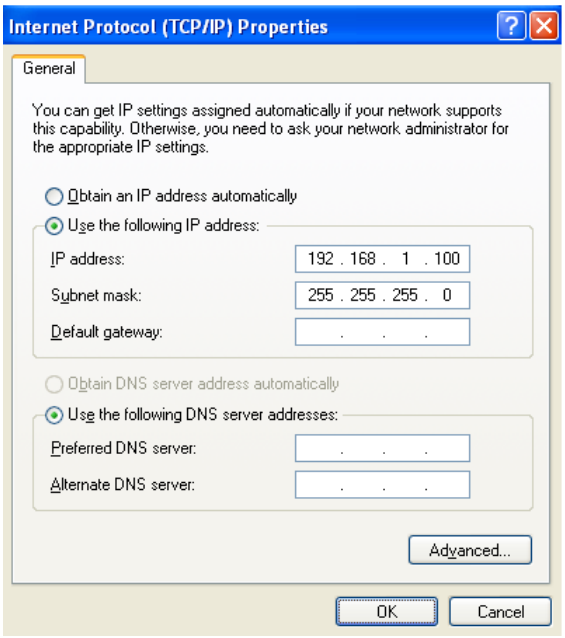
Internet Protocol (TCP/IP) Properties
General
You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.
Obtain an IP address automatically
Use the following IP address:
IP address: 192 . 168 . 1 . 100
Subnet mask: 255 . 255 . 255 . 0
Default gateway:
Obtain DNS server address automatically
Use the following DNS server addresses:
Preferred DNS server:
Alternate DNS server:
Advanced...
OK
Cancel

You are ready now to configure the SNMP-24MGB by using your PC.

3.3 Management Interface

The SNMP-24MGB can be configured using on the management interfaces below:

- **Web Management (HTTP)**: You can manage your SNMP-24MGB by simply typing its IP address in the web browser. Most functions of SNMP-24MGB can be accessed by web management inter face. We recommend using this interface for initial configurations. To begin, simply enter SNMP-24MGB's IP address (**default is 192.168.1.1**) on the web browser. The default username is **admin** and password is **airlive**.

- **Console Management (Terminal)**: SNMP-24MGB can be managed through terminal emulation program or **Hyper Terminal**.

  When the connection between SNMP-24MGB and PC is ready, turn on the PC and run a terminal emulation program or Hyper Terminal and configure its communication parameters to match the following default characteristics of the console port

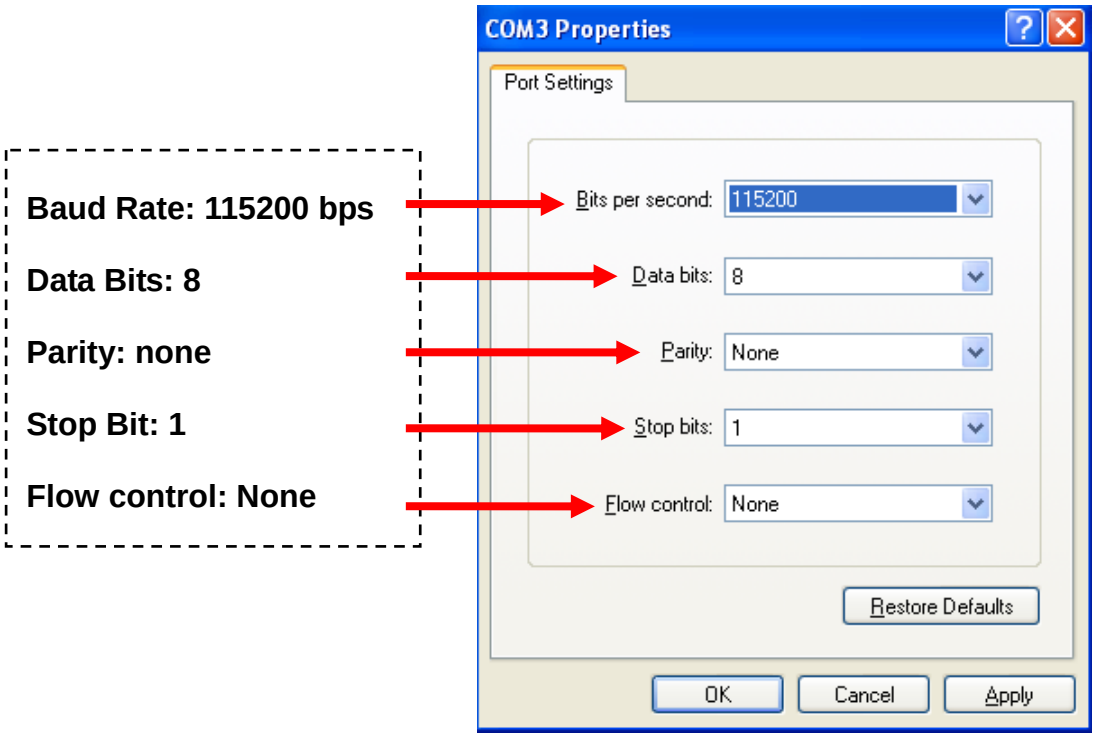

After finishing the parameter settings, click "**OK**". When the blank screen shows up, press Enter key to bring out the login prompt. Key in the "**admin**"(default value) for the User name and "**airlive**" for the Password (use **Enter** key to switch), then press Enter key and the Main Menu of console management appears. Please see below figure for login screen.

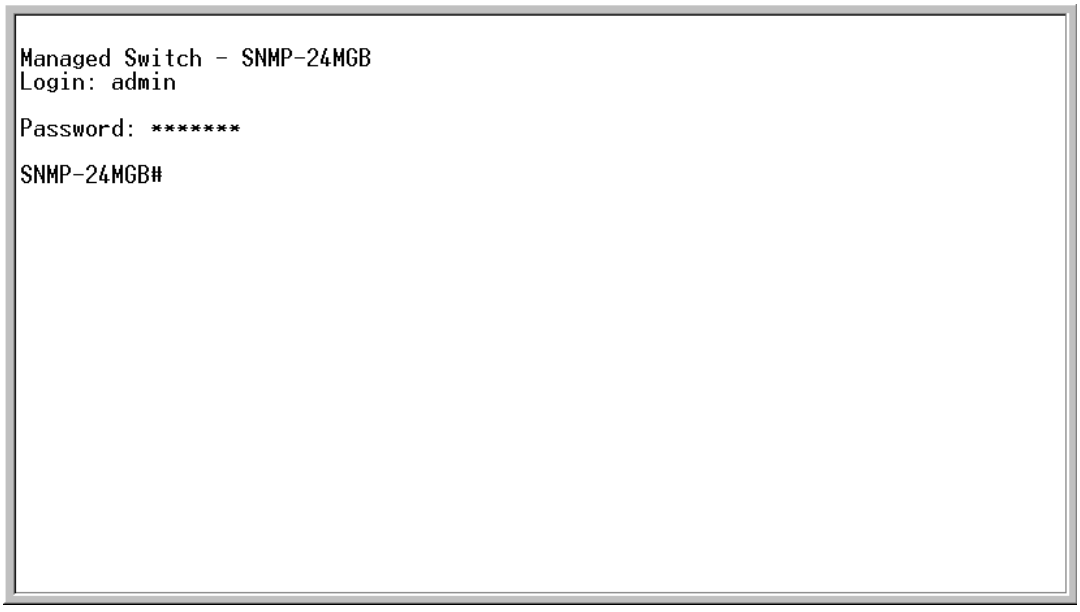

- **Telnet Management (Terminal)**: SNMP-24MGB can be managed through telnet. To

use the telnet, please open the command line windows. Then type “telnet 192.168.1.1” to start.

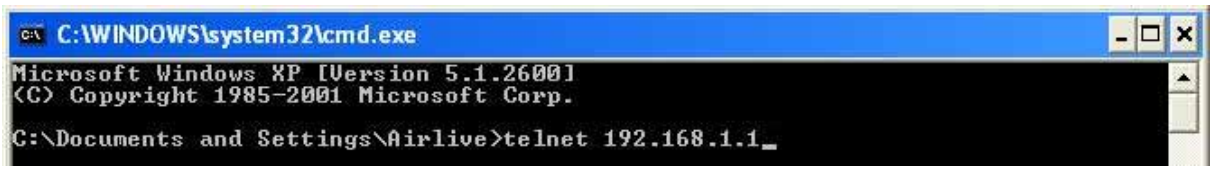

When asking for username and password, please enter “**admin**” as username and “**airlive**” as password.

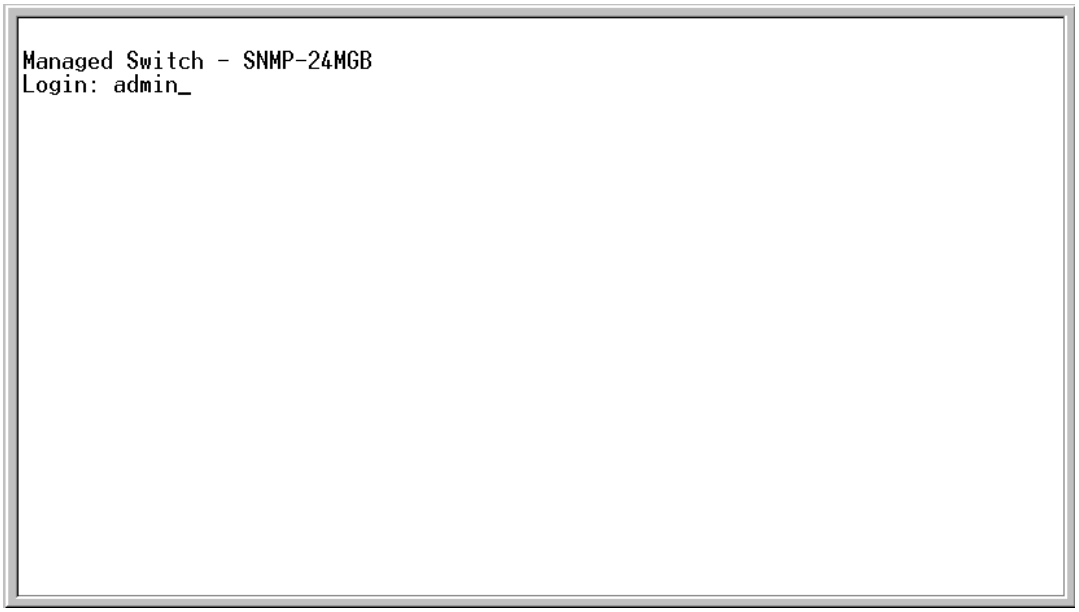

After you login successfully, the prompt will be shown as “#“ if you are the first login person and your authorization is administrator; otherwise it may show “**$**“. See the following two figures. The former means you behave as an administrator and have the access right of the system. As to the latter, it means you behave as a guest and are only allowed to view the system without the permission to do any setting for this switch.

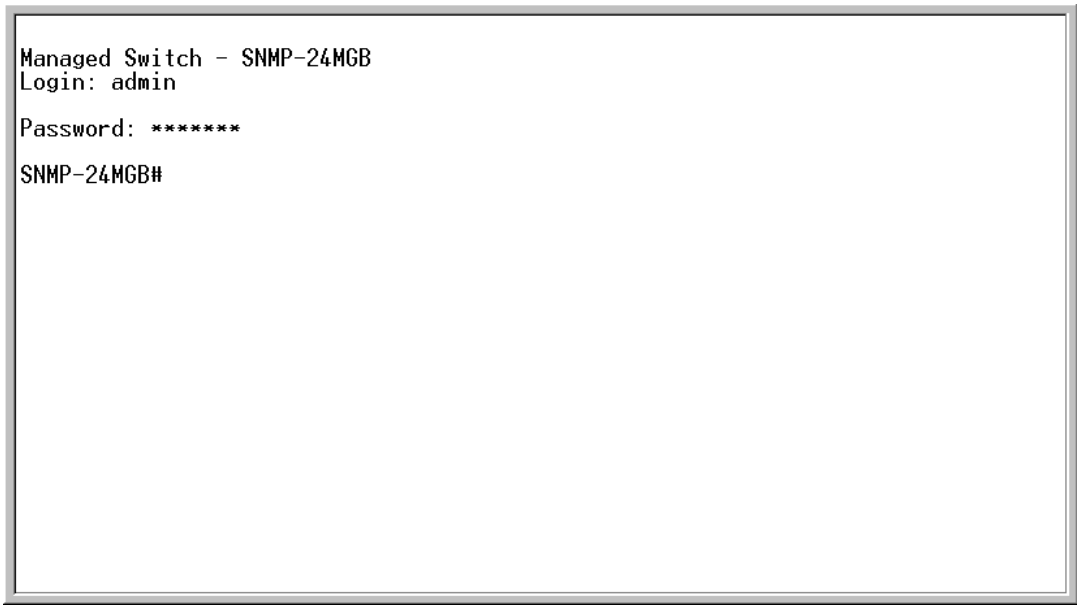

3.4 Introduction to Web Management

The SNMP-24MGB offers Web Management interfaces for users. Users can easily access and control SNMP-24MGB via web browsers. The Web-Based Management supports Internet Explorer 5.0. It is based on Java Applets with an aim to reduce network bandwidth consumption, enhance access speed and present an easy viewing screen.

Note: By default, IE5.0 or later version does not allow Java Applets to open sockets. The user has to explicitly modify the browser setting to enable Java Applets to use network ports.

3.4.1 Getting into Web Management

Web Management (HTTP)

1. Launch the Internet Explorer.
2. Type http://192.168.1.1. Press "**Enter**".

3. The login screen appears.
4. Key in the user name and password. The default user name is "**admin**" and password is "**airlive**".

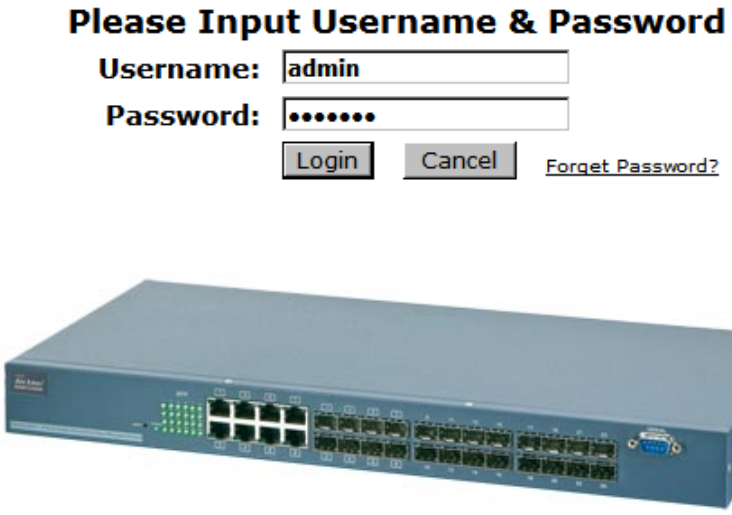

5. Click "**Enter**" or "**Login**", then the home screen of the Web-based management appears.

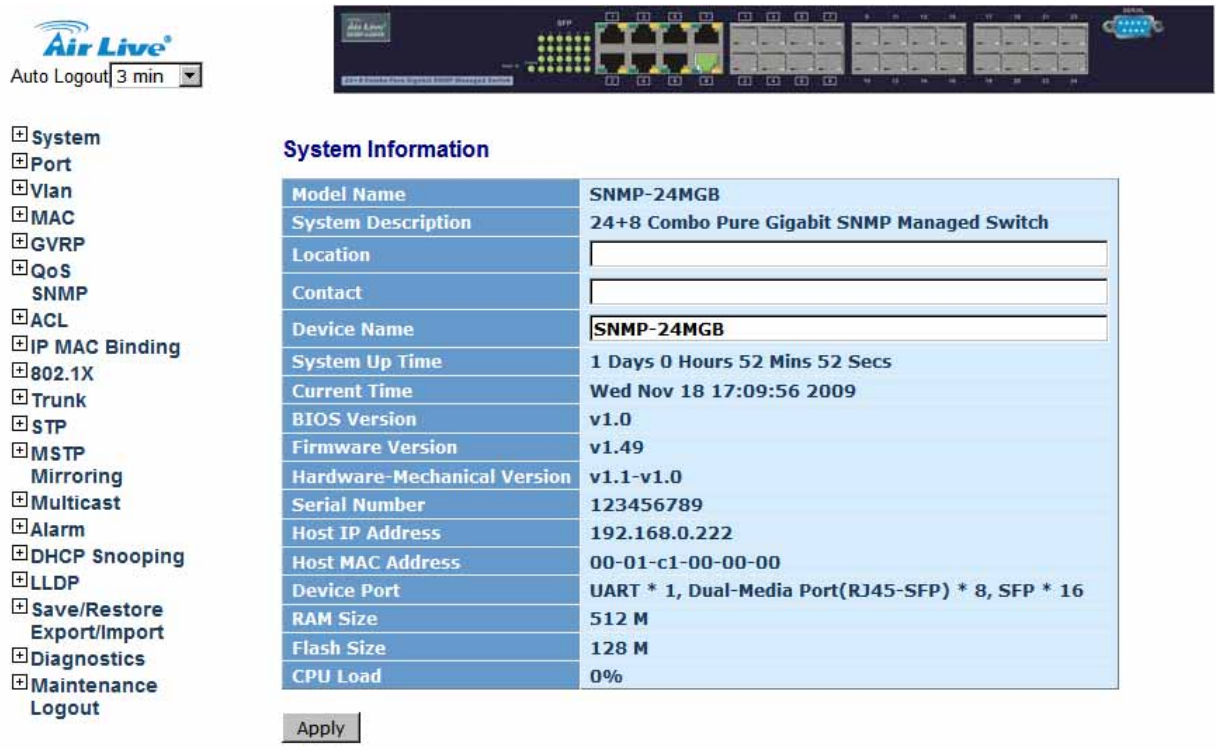

4 Web Management in SNMP-24MGB

In this chapter, we will explain all settings in web management interface. Please be sure to read through Chapter 3's "*Introduction to Web Management*" first.

4.1 Menu Structure of SNMP-24MGB

The web management menu of SNMP-24MGB is divided into 3 parts: **Top Bar, Side Menu Bar, and Main Screen.**

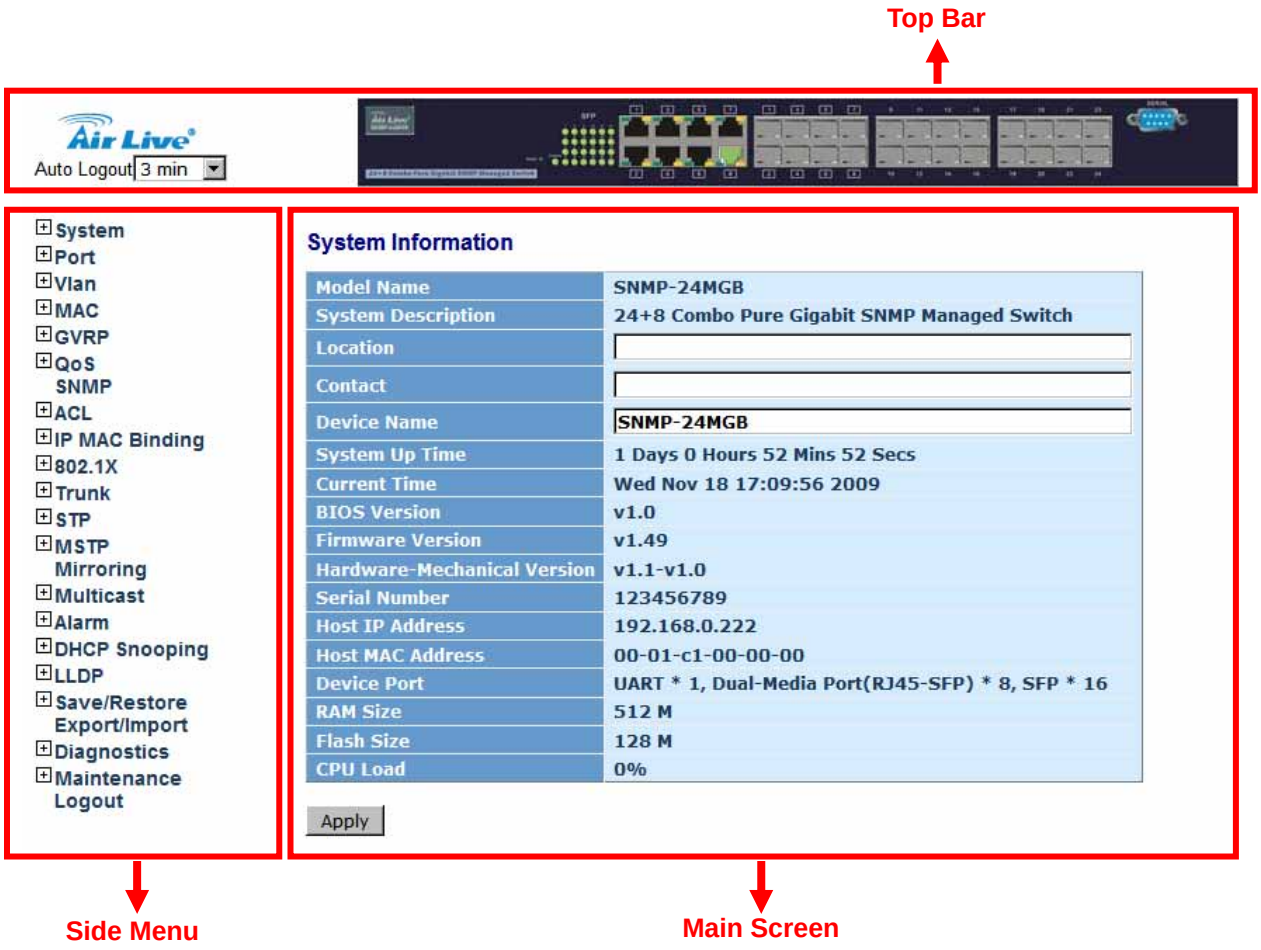

- **Top Bar**: It display panel GUI. You can direct click the port on the Switch figure on the top of web page. Then, you will see the port information. On the left-top corner, there is a pull-down list for Auto Logout. For the sake of security, we provide auto-logout function to protect you from illegal user as you are leaving. If you do not choose any selection in Auto Logout list, it means you turn on the Auto Logout

function and the system will be logged out automatically when no action on the device 3 minutes later. If OFF is chosen, the screen will keep as it is. Default is ON.

- **Side Menu:** All management functions will show in Side Menu, you can choose any one of them to configure its setting. The detailed introduction for all management function will explain in below chapters. The following list is the full function tree for web user interface.

- **Main Screen**: Once choosing any function of Side Menu, the configuration page of the function will show in Main Screen. You can configure the function by instruction of manual.

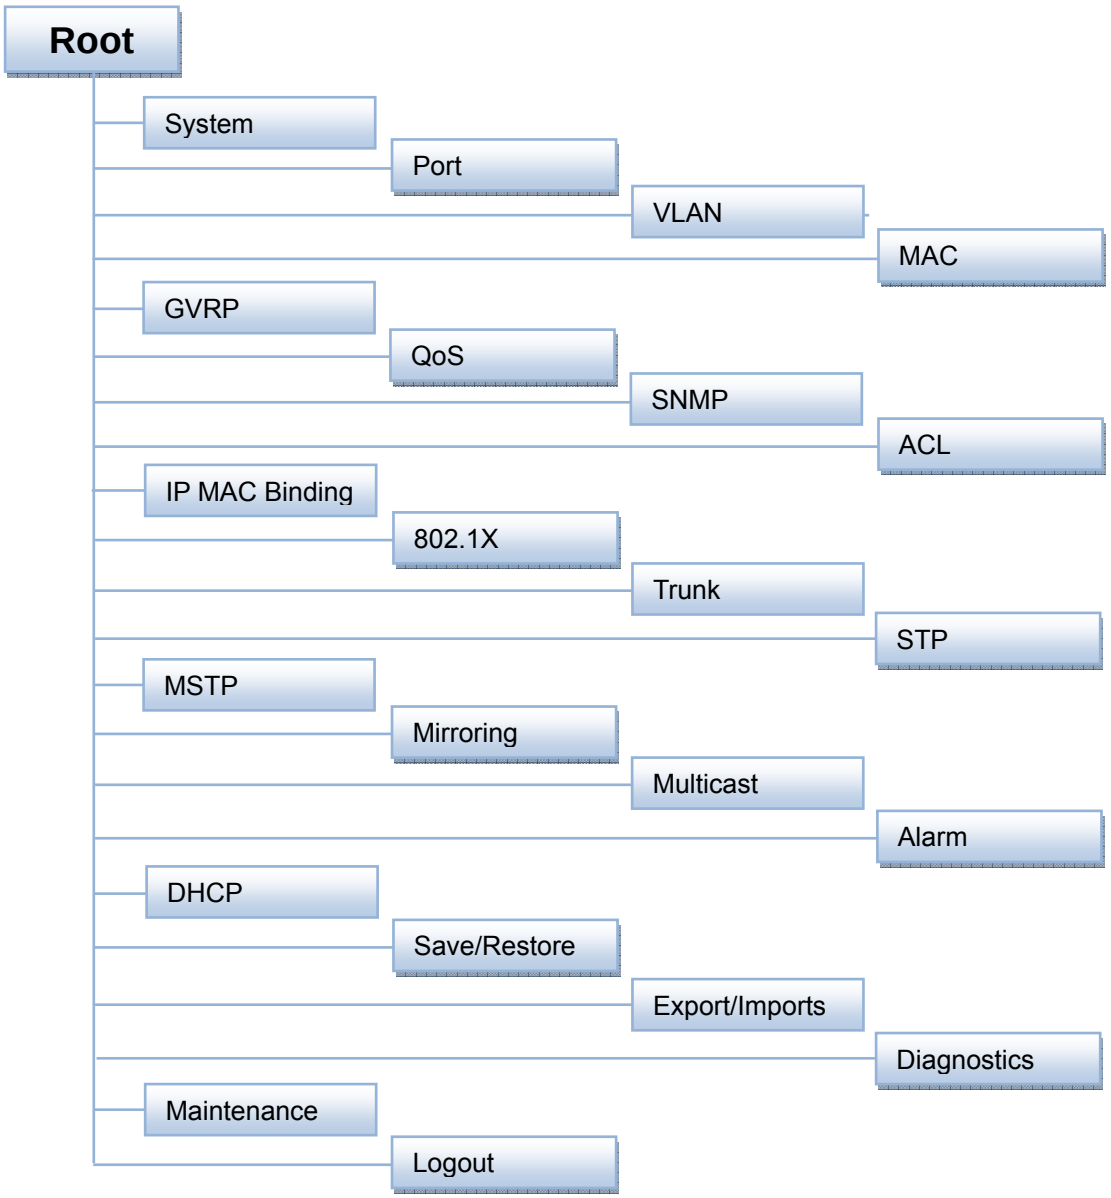

4.2 System

4.2.1 IP Configuration

Function name:

System Information

Function description:

Show the basic system information.

System Information

Model Name	SNMP-24MGB
System Description	24+8 Combo Pure Gigabit SNMP Managed Switch
Location	
Contact	
Device Name	SNMP-24MGB
System Up Time	1 Days 0 Hours 58 Mins 15 Secs
Current Time	Wed Nov 18 17:15:21 2009
BIOS Version	v1.0
Firmware Version	v1.49
Hardware-Mechanical Version	v1.1-v1.0
Serial Number	123456789
Host IP Address	192.168.0.222
Host MAC Address	00-01-c1-00-00-00
Device Port	UART * 1, Dual-Media Port(RJ45-SFP) * 8, SFP * 16
RAM Size	512 M
Flash Size	128 M
CPU Load	3%

Apply

Parameter description:

Model name:

The product name of this device.

System description:

The product description of this device.

Location:

Basically, it is the location where this switch is put. It can be defined by user.

Contact:

For easily managing and maintaining device, you may write down the contact person and phone here for getting help soon. You can configure this parameter through the device's user interface or SNMP.

Device name:

The name of the switch. It can be defined by user. Default is SNMP-24MGB.

System up time:

The time accumulated since this switch is powered up. Its format is day, hour, minute, second.

Current time:

Show the system time of the switch. Its format is day of week, month, day, hours : minutes : seconds, year. For instance, Mon, March. 03, 14:54:07, 2008.

BIOS version:

The version of the BIOS in this switch.

Firmware version:

The firmware version in this switch.

Hardware-Mechanical version:

The version of Hardware and Mechanical. The figure before the hyphen is the version of electronic hardware; the one after the hyphen is the version of mechanical.

Serial number:

The serial number is assigned by the manufacturer.

Host IP address:

The IP address of the switch.

Host MAC address:

It is the Ethernet MAC address of the management agent in this switch.

Device Port:

Show all types and numbers of the port in the switch.

RAM size:

The size of the DRAM in this switch.

Flash size:

The size of the flash memory in this switch.

CPU Load:

To display the CPU loading percent on this switch.

4.2.2 Account Configuration

In this function, only administrator can create, modify or delete the username and password. Administrator can modify other guest identities' password without confirming the password but it is necessary to modify the administrator-equivalent identity. Guest-equivalent identity can modify his password only. Please note that you must confirm administrator/guest identity in the field of Authorization in advance before configuring the username and password. Only one administrator is allowed to exist and unable to be deleted. In addition,

up to 4 guest accounts can be created.

The default setting for user account is:

Username: admin **Password: airlive**

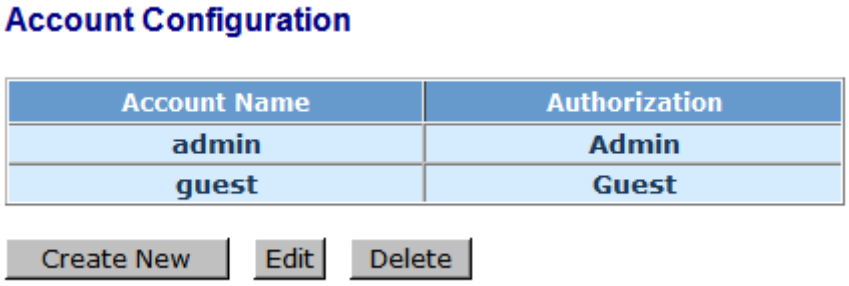

4.2.3 Time Configuration

The switch provides manual and automatic ways to set the system time via NTP. Manual setting is simple and you just input “Year”, “Month”, “Day”, “Hour”, “Minute” and “Second” within the valid value range indicated in each item. If you input an invalid value, for example, 61 in minute, the switch will clamp the figure to 59.

NTP is a well-known protocol used to synchronize the clock of the switch system time over a network. NTP, an internet draft standard formalized in RFC 1305, has been adopted on the system is version 3 protocol. The switch provides four built-in NTP server IP addresses resided in the Internet and a user-defined NTP server IP address. The time zone is Greenwich-centered which uses the expression form of GMT+/- xx hours.

Function name:

Time

Function description:

Set the system time by manual input or set it by syncing from Time servers. The function also supports daylight saving for different area’s time adjustment.

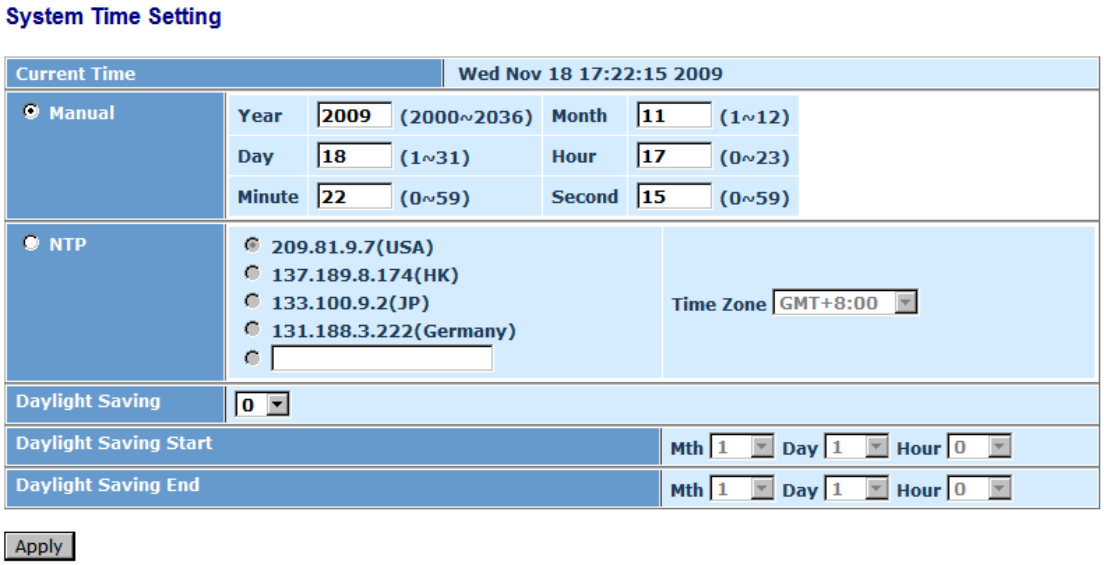

Parameter description:

Current Time:

Show the current time of the system.

Manual:

This is the function to adjust the time manually. Filling the valid figures in the fields of Year, Month, Day, Hour, Minute and Second respectively and press **<Apply>** button, time is adjusted. The valid figures for the parameter Year, Month, Day, Hour, Minute and Second are >=2000, 1-12, 1-31, 0-23, 0-59 and 0-59 respectively. Input the wrong figure and press **<Apply>** button, the device will reject the time adjustment request. There is no time zone setting in Manual mode.

Default: Year = 2000; Month = 1; Day = 1; Hour = 0, Minute = 0; Second = 0

NTP:

NTP is Network Time Protocol and is used to sync the network time based Greenwich Mean Time (GMT). If use the NTP mode and select a built-in NTP time server or manually specify an user-defined NTP server as well as Time Zone, the switch will sync the time in a short after pressing **<Apply>** button. Though it synchronizes the time automatically, NTP does not update the time periodically without user's processing.

Time Zone is an offset time off GMT. You have to select the time zone first and then perform time sync via NTP because the switch will combine this time zone offset and updated NTP time to come out the local time, otherwise, you will not able to get the correct time. The switch supports configurable time zone from –12 to +13 step 1 hour.

Default Time zone: +8 Hrs.

Daylight Saving:

Daylight saving is adopted in some countries. If set, it will adjust the time lag or in advance in unit of hours, according to the starting date and the ending date. For example, if you set the day light saving to be 1 hour. When the time passes over the starting time, the system time will be increased one hour after one minute at the time since it passed over. And when the time passes over the ending time, the system time will be decreased one hour after one minute at the time since it passed over.

The switch supports valid configurable day light saving time is –5 ~ +5 step one hour. The zero for this parameter means it need not have to adjust current time, equivalent to in-act daylight saving. You don't have to set the starting/ending date as well. If you set daylight saving to be non-zero, you have to set the starting/ending date as well; otherwise, the daylight saving function will not be activated.

Default for Daylight Saving: 0.

The following parameters are configurable for the function Daylight Saving and described in detail.

Day Light Saving Start :

This is used to set when to start performing the day light saving time.

Mth: Range is 1 ~ 12; Default: 1

Day: Range is 1 ~ 31; Default: 1

Hour: Range is 0 ~ 23; Default: 0

Day Light Saving End :

This is used to set when to stop performing the daylight saving time.

Mth: Range is 1 ~ 12; Default: 1

Day: Range is 1 ~ 31; Default: 1

Hour: Range is 0 ~ 23; Default: 0

4.2.4 IP Configuration

It is one of the most important configurations in the switch. Without the proper setting, network manager will not be able to manage or view the device. The switch supports both manual IP address setting and automatic IP address setting via DHCP server. When IP address is changed, you must reboot the switch to have the setting taken effect and use the new IP to browse for web management and CLI management.

Function name:

IP Configuration

Function description:

Set IP address, subnet mask, default gateway and DNS for the switch.

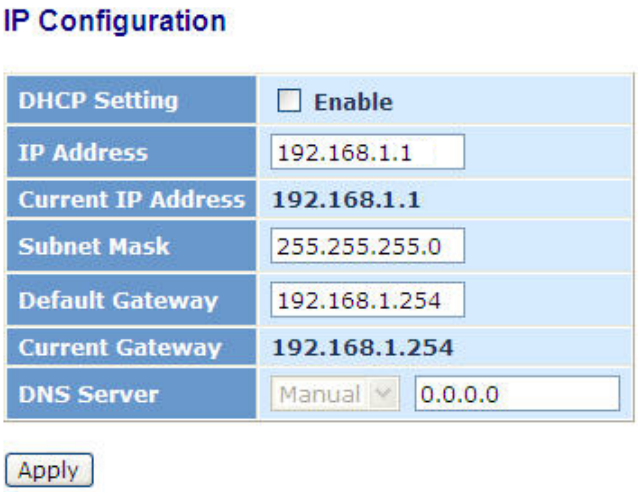

Parameter description:

DHCP Setting:

The switch supports DHCP client used to get an IP address automatically if you set this function “Enable”. When enabled, the switch will issue the request to the DHCP server resided in the network to get an IP address. If DHCP server is down or does not exist, the switch will issue the request and show IP address is under requesting, until the DHCP server is up. Before getting an IP address from DHCP server, the device will not continue booting procedures. If set this field “Disable”, you’ll have to input IP address manually. For more details about IP address and DHCP, please see the Section 2-1-5 “IP Address Assignment” in this manual.

Default: Disable

IP address:

Users can configure the IP settings and fill in new values if users set the DHCP function "Disable". Then, click **<Apply>** button to update. When DHCP is disabled, **Default: 192.168.1.1**

If DHCP is enabled, this field is filled by DHCP server and will not allow user manually set it any more.

Subnet mask:

Subnet mask is made for the purpose to get more network address because any IP device in a network must own its IP address, composed of Network address and Host address, otherwise can't communicate with other devices each other. But unfortunately, the network classes A, B, and C are all too large to fit for almost all networks, hence, subnet mask is introduced to solve this problem. Subnet mask uses some bits from host address and makes an IP address looked Network address, Subnet mask number and host address. It is shown in the following figure. This reduces the total IP number of a network able to support, by the amount of 2 power of the bit number of subnet number (2^(bit number of subnet number)).

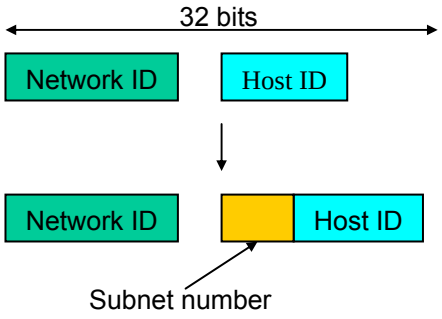

Subnet mask is used to set the subnet mask value, which should be the same value as that of the other devices resided in the same network it attaches. **Default: 255.255.255.0**

Default gateway:

Set an IP address for a gateway to handle those packets that do not meet the routing rules predefined in the device. If a packet does not meet the criteria for other pre-defined path, it must be forwarded to a default router on a default path. This means any packet with undefined IP address in the routing table will be sent to this device unconditionally. **Default: 192.168.1.254**

DNS:

It is Domain Name Server used to serve the translation between IP address and name address.

The switch supports DNS client function to re-route the mnemonic name address to DNS server to get its associated IP address for accessing Internet. User can specify a DNS IP address for the switch. With this, the switch can translate a mnemonic name address into an IP address.

There are two ways to specify the IP address of DNS. One is fixed mode, which manually specifies its IP address, the other is dynamic mode, which is assigned by DHCP server while DHCP is enabled. DNS can help you easily remember the mnemonic address name with the meaningful words in it. Default is no assignment of DNS address. **Default: 0.0.0.0**

4.2.5 Loop Detection

Loop detection is used to detect the presence of traffic. When switch receives packet's (looping detection frame) MAC address the same as oneself from port, show Loop detection happens. The port will be locked when it received the looping detection frames. If you want to resume the locked port, please find out the looping path and take off the looping path, then select the resume the locked port and click on "Resume" to turn on the locked ports.

Function name:

Loop Detection

Function description:

Display whether switch open Loop detection.

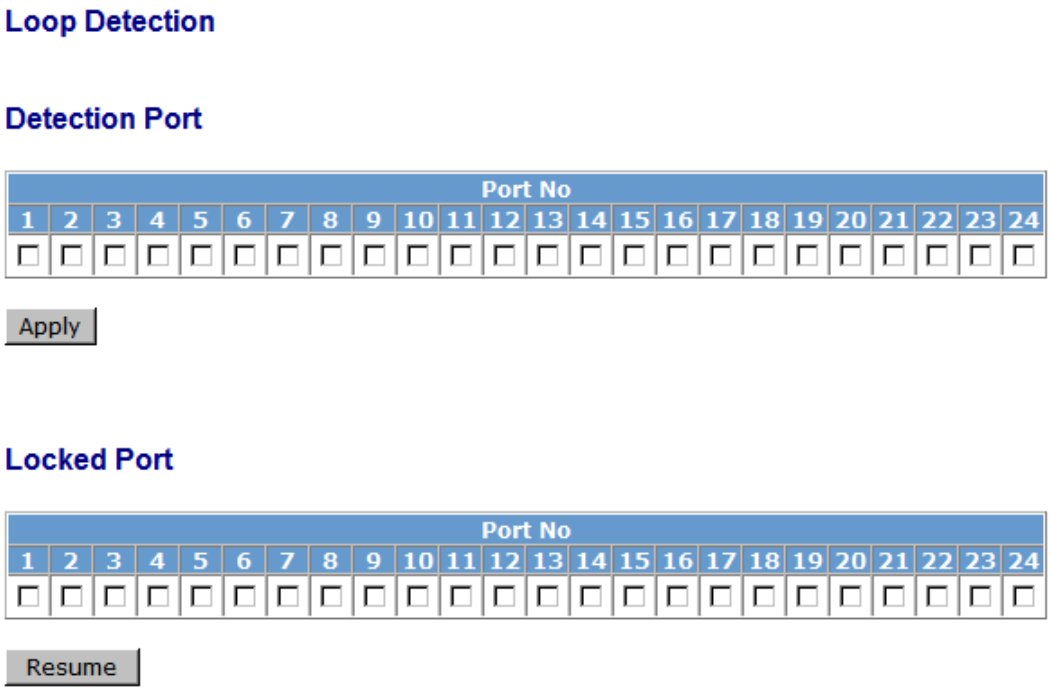

Parameter description:

Port No:

Display the port number. The number is 1 – 24.

Detection Port - Enable:

When Port No. is chosen, and enable port's Loop detection, the port can detect loop happens. When loop happen, port will be locked. If loop did not happen, port maintains Unlocked.

Locked Port - Resume:

When choosing Resume, locked port will be opened and turned into unlocked. If not choosing Resume, Port maintains locked.

4.2.6 Management Policy

Through the management security configuration, the manager can do the strict setup to control the switch and limit the user to access this switch.

The following rules are offered for the manager to manage the switch:

Rule 1: When no list exists, then it will accept all connections.

Rule 2: When only “accept lists” exist, then it will deny all connections, excluding the connection inside of the accepting range.

Rule 3: When only “deny lists” exist, then it will accept all connections, excluding the connection inside of the denying range.

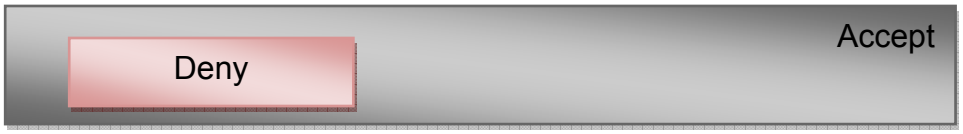

Rule 4 When both “accept and deny” lists exist, then it will deny all connections, excluding the connection inside of the accepting range.

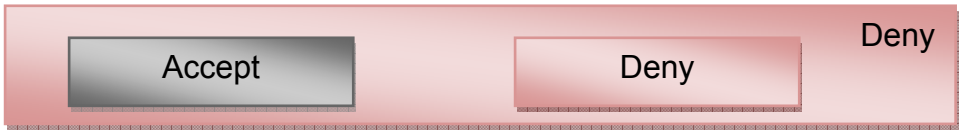

Rule 5 When both “accept and deny” lists exist, then it will deny all connections, excluding the connection inside of the accepting range and NOT inside of the denying range at the same time.

Function name:

Management Security Configuration

Function description:

The switch offers Management Security Configuration function. With this function, the manager can easily control the mode that the user connects to the switch. According to

the mode, users can be classified into two types: Those who are able to connect to the switch (Accept) and those who are unable to connect to the switch (Deny). Some restrictions also can be placed on the mode that the user connect to the switch, for example, we can decide that which VLAN VID is able to be accepted or denied by the switch, the IP range of the user could be accepted or denied by the switch, the port that the user is allowed or not allowed to connect with the switch, or the way of controlling and connecting to the switch via Http, Telnet or SNMP.

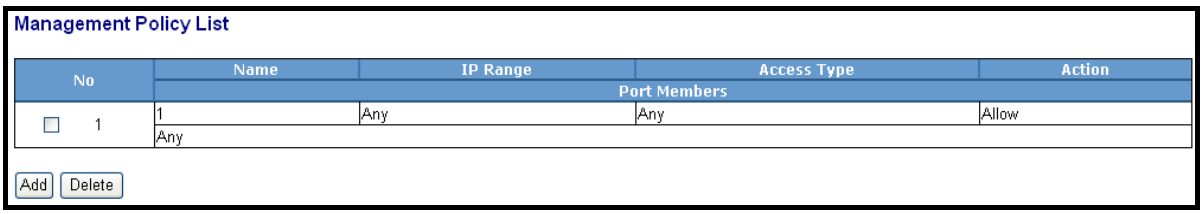

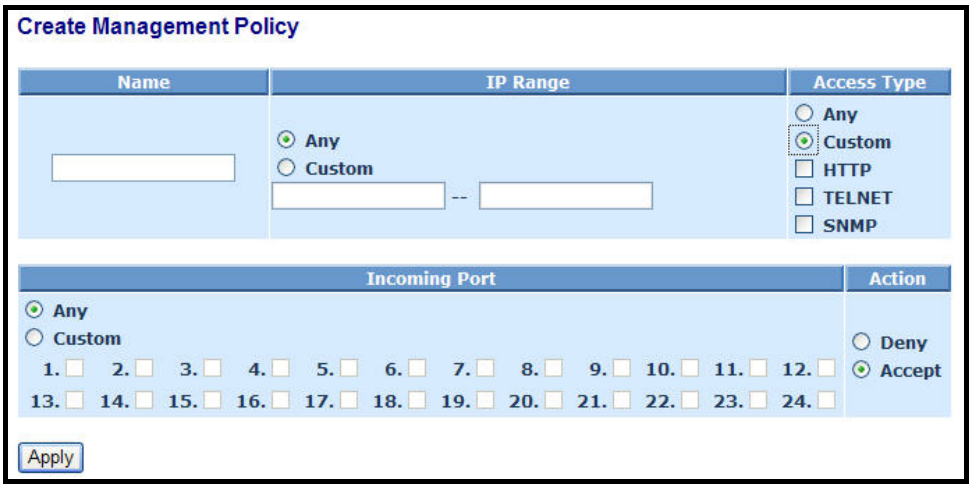

Add:

A new entry of Management Security Configuration can be created after the parameters as mentioned above had been setup and then press **<Add>** button. The existed entry also can be modified by pressing this button.

Delete:

Remove the existed entry of Management Security Configuration from the management security table.

Name:

A name is composed of any letter (A-Z, a-z) and digit (0-9) with maximal 8 characters.

IP Range:

The switch supports two kinds of options for managed valid IP Range, including “Any” and “Custom”. Default is “Any”. In case that ”Custom” is chosen, you can assigned effective IP range. The valid range is 0.0.0.0~255.255.255.255.

Incoming Port:

The switch supports two kinds of options for managed valid Port Range, including “Any” and “Custom”. Default is “Any”. You can select the ports that you would like them to be worked and restricted in the management security configuration if ”Custom” had been chosen.

Access Type:

The switch supports two kinds of options for managed valid Access Type, including “Any” and “Custom”. Default is “Any”. “Http”, “Telnet” and “SNMP” are three ways for the access and managing the switch in case that” Custom” had been chosen.

Action:

The switch supports two kinds of options for managed valid Action Type, including “Deny” and “Accept”. Default is “Deny”. When you choose “Deny” action, you will be restricted and refused to manage the switch due to the “Access Type” you choose. However, while you select “Accept” action, you will have the authority to manage the switch.

4.2.7 System Log

The System Log provides information about system logs, including information when the device was booted, how the ports are operating, when users logged in, when sessions timed out, as well as other system information.

Function name:

System log

Function description:

The Trap Log Data is displaying the log items including all SNMP Private Trap events, SNMP Public traps and user logs occurred in the system. In the report table, No., Time and Events are three fields contained in each trap record.

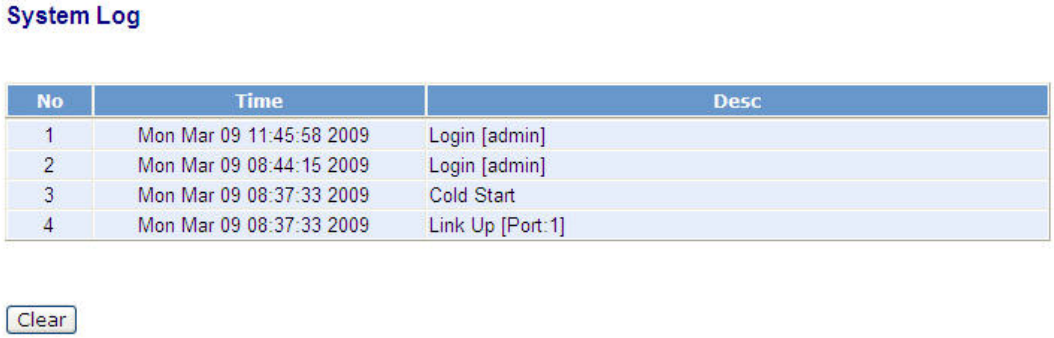

Parameter description:

No:

Display the order number that the trap happened.

Time:

Display the time that the trap happened.

Desc:

Display a description event recorded in the System Log.

Clear:

Clear log data.

4.2.8 Virtual Stack

Function name:

Virtual Stack

Function description:

Virtual Stack Management (VSM) is the group management function. Through the proper configuration of this function, switches in the same LAN will be grouped automatically. And among these switch, one switch will be a master machine, and the others in this group will become slave devices.

VSM offers a simple centralized management function. It is not necessary to remember the address of all devices, manager is capable of managing the network with knowing the address of the Master machine. Instead of SNMP or Telnet UI, VSM is only available in Web UI. While one switch becomes the Master, two rows of buttons for group device will appear on the top of its Web UI. By pressing these buttons, user will be allowed to connect the Web UI of the devices of the group in the same window without the login of these devices.

The most top-left button is only for Master device. The background color of the button you press will be changed to represent that the device is under your management.

Note: It will remove the grouping temporarily in case that you login the switch via the console.

The devices of the group will be shown as station address (the last number of IP Address) + device name on the button (e.g. 196_SBMP-24MGB), otherwise it will show ” ---- “ if no corresponding device exists.

Once the devices join the group successfully, then they are merely able to be managed via Master device, and user will fail to manage them via telnet/console/web individually.

Up to 16 devices can be grouped for VSM, however, only one Master is allowed to exist in each group. For Master redundancy, user may configure more than two devices as Master device, however, the Master device with the smaller MAC value will be the Master one. All of these 16 devices can become Master device and back up with each other.

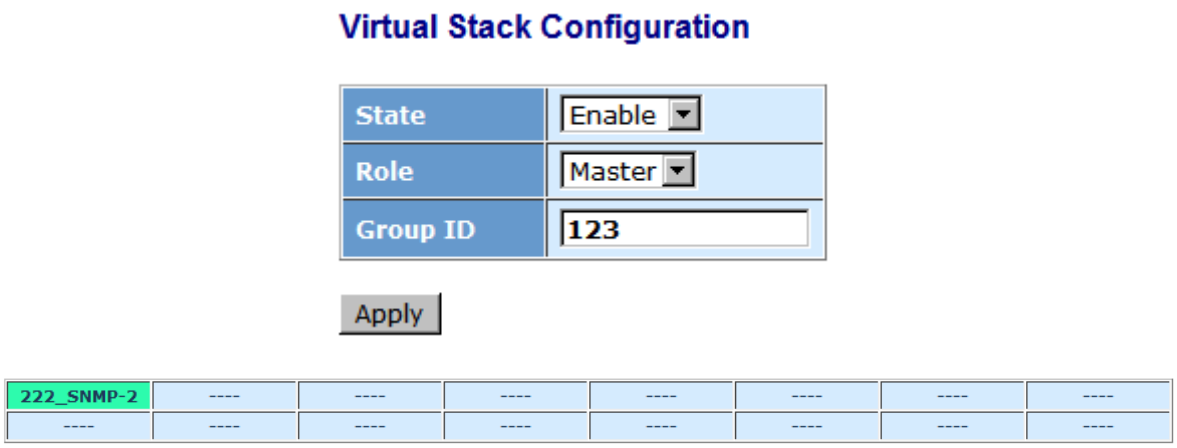

Parameter description:

State:

It is used for the activation or de-activation of VSM. **Default is Enable**.

Role:

The role that the Switch would like to play in virtual stack. Two types of roles, including master and slave are offered for option. **Default is Master**.

Group ID:

It is the group identifier (GID) which signs for VSM. Valid letters are A-Z, a-z, 0-9, “ - “ and “_” characters. The maximal length is 15 characters.

4.3 Port

Port Configuration, **Port Status**, **Simple Counter** and **Detail Counter** are contained in this function folder for port monitor and management. Each of them will be described in detail orderly in the following sections.

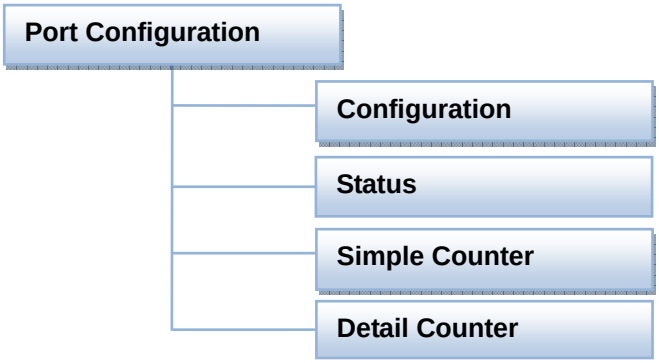

4.3.1 Port Configuration

Port Configuration is applied to change the setting of each port. In this configuration function, you can set/reset the following functions. All of them are described in detail below.

Function name:

Port Configuration

Function description:

It is used to set each port's operation mode. The switch supports 3 parameters for each port. They are state, mode and flow control.

Port Configuration

Port	Media	Speed	Flow Control	Maximum Frame	Excessive Collision Mode	Description
1	TP	Auto	☑	9600	Discard	
	SFP	Auto				
2	TP	Auto	☑	9600	Discard	
	SFP	Auto				
3	TP	Auto	☑	9600	Discard	
	SFP	Auto				
4	TP	Auto	☑	9600	Discard	
	SFP	Auto				
5	TP	Auto	☑	9600	Discard	
	SFP	Auto				
6	TP	Auto	☑	9600	Discard	
	SFP	Auto				
7	TP	Auto	☑	9600	Discard	
	SFP	Auto				
8	TP	Auto	☑	9600	Discard	
	SFP	Auto				
9	SFP	Auto	☑	9600		
10	SFP	Auto	☑	9600		
11	SFP	Auto	☑	9600		
12	SFP	Auto	☑	9600		
13	SFP	Auto	☑	9600		
14	SFP	Auto	☑	9600		
15	SFP	Auto	☑	9600		
16	SFP	Auto	☑	9600		
17	SFP	Auto	☑	9600		
18	SFP	Auto	☑	9600		
19	SFP	Auto	☑	9600		
20	SFP	Auto	☑	9600		
21	SFP	Auto	☑	9600		
22	SFP	Auto	☑	9600		
23	SFP	Auto	☑	9600		
24	SFP	Auto	☑	9600		

Apply

Parameter description:

Port:

To display the port index

Media:

To display the port media type with UTP or SFP

Speed:

Set the speed and duplex of the port. In speed, if the media is 1Gbps fiber, it is always 1000Mbps and the duplex is full only. If the media is TP, the Speed/Duplex is comprised of the combination of speed mode, 10/100/1000Mbps, and duplex mode, full duplex and half duplex. The following table summarized the function the

media supports.

Media type	NWay	Speed	Duplex
1000M TP	ON/OFF	10/100/1000M	Full for all, Half for 10/100
1000M Fiber	ON/OFF	1000M	Full

In Auto-negotiation mode, no default value. In Forced mode, default value depends on your setting.

Flow Control:

There are two modes to choose in flow control, including Enable and Disable. If flow control is set Enable, both parties can send PAUSE frame to the transmitting device(s) if the receiving port is too busy to handle. When it is set Disable, there will be no flow control in the port. It drops the packet if too much to handle.

Maximum Frame:

This module offers 1518~9600 (Bytes) packet length to make the long packet.

Excessive Collision Mode:

There are two modes to choose when excessive collision happens in half-duplex condition as below:

Discard: The **"Discard"** mode determines whether the MAC drop frames after an excessive collision has occurred. If set, a frame is dropped after excessive collisions. This is IEEE 802.3 half-duplex flow control operation.

Restart: The **"Restart"** mode determines whether the MAC retransmits frames after an excessive collision has occurred. If set, a frame is not dropped after excessive collisions, but the backoff sequence is restarted. This is a violation of IEEE 802.3, but is useful in non-dropping half-duplex flow control operation.

Description:

Description of device ports can not include " # % & ' + \.

4.3.2 Port Status

The function gathers the information of all ports' current status and reports it by the order of port number, media, link status, port state, Auto-Negotiation status, speed/duplex, Rx Pause and Tx Pause. An extra media type information for the module ports 1 and 8 is also offered.

Port Status

Port	Link	Speed	Flow Control		Description	Media
			Rx	Tx		
1	up	1Gfdx	V	V		TP
2	down	down	X	X		TP
3	down	down	X	X		TP
4	down	down	X	X		TP
5	down	down	X	X		TP
6	down	down	X	X		TP
7	down	down	X	X		TP
8	down	down	X	X		TP
9	down	down	X	X		SFP
10	down	down	X	X		SFP
11	down	down	X	X		SFP
12	down	down	X	X		SFP
13	down	down	X	X		SFP
14	down	down	X	X		SFP
15	down	down	X	X		SFP
16	down	down	X	X		SFP
17	down	down	X	X		SFP
18	down	down	X	X		SFP
19	down	down	X	X		SFP
20	down	down	X	X		SFP
21	down	down	X	X		SFP
22	down	down	X	X		SFP
23	down	down	X	X		SFP
24	down	down	X	X		SFP

Function name:

Port Status

Function Description:

Report the latest updated status of all ports in this switch. When any one of the ports in the switch changes its parameter displayed in the page, it will be automatically refreshed the port current status about every 5 seconds.

Parameter Description:

Port:

Display the port number. The number is 1 – 24.

Link:

Show that if the link on the port is active or not. If the link is connected to a working-well device, the Link will show the link “Up”; otherwise, it will show “Down”. This is determined by the hardware on both devices of the connection. No default value.

Speed / Duplex Mode:

Display the speed and duplex of all port. There are three speeds 10Mbps, 100Mbps and 1000Mbps supported for TP media, and the duplex supported is half duplex and full duplex. If the media is 1Gbps fiber, it is 1000Mbps supported only. The status of speed/duplex mode is determined by 1) the negotiation of both local port and link partner in “Auto Speed” mode or 2) user setting in “Force” mode. The local port has to be preset its capability. Default is None, depends on the result of the negotiation.

Flow Control:

Show each port’s flow control status.

There are two types of flow control in Ethernet, Backpressure for half-duplex operation and Pause flow control (IEEE802.3x) for full-duplex operation. The switch supports both of them. **Default is None**, depends on the result of the negotiation.

Description:

Network managers provide a description of device ports.

Port 8 Detail Information

Link	Up
State	Enabled
Auto Negotiation	Enabled
Speed/Duplex	100/Full
Flow Control	rx on, tx on
Ingress All State	Disabled
Ingress All Rate	500 Kbps
Egress All State	Disabled
Egress All Rate	500 Kbps
Tx Byte	323884
Rx Byte	46688
Tx Packet	33573273
Rx Packet	6005659
Tx Collision	0
Rx Error Packet	7
Description	

Close

Parameter description of Port 1 ~ Port 24:

Connector Type:

Display the connector type, for instance, UTP, SC, ST, LC and so on.

Fiber Type:

Display the fiber mode, for instance, Multi-Mode, Single-Mode.

Tx Central Wavelength:

Display the fiber optical transmitting central wavelength, for instance, 850nm, 1310nm, 1550nm and so on.

Baud Rate:

Display the maximum baud rate of the fiber module supported, for instance, 10M, 100M, 1G and so on.

Vendor OUI:

Display the Manufacturer's OUI code which is assigned by IEEE.

Vendor Name:

Display the company name of the module manufacturer.

Vendor P/N:

Display the product name of the naming by module manufacturer.

Vendor Rev (Revision):

Display the module revision.

Vendor SN (Serial Number):

Show the serial number assigned by the manufacturer.

Date Code:

Show the date this SFP module was made.

Temperature:

Show the current temperature of SFP module.

Vcc:

Show the working DC voltage of SFP module.

Mon1(Bias) mA:

Show the Bias current of SFP module.

Mon2(TX PWR):

Show the transmit power of SFP module.

Mon3(RX PWR):

Show the receiver power of SFP module.

4.3.3 Simple Counter

The function of Simple Counter collects any information and provides the counting about the traffic of the port, no matter the packet is good or bad.

In below figure, the window can show all ports' counter information at the same time. Each data field has 20-digit long. If the counting is overflow, the counter will be reset and restart counting. The data is updated every time interval defined by the user. The Refresh Interval is used to set the update frequency.

Function name:

Simple Counter

Function description:

Display the summary counting of each port's traffic, including Tx Byte, Rx Byte, Tx Packet, Rx Packet, Tx Collision and Rx Error Packet.

Port Statistics Overview

Auto-refresh ☐ Refresh Clear

Port	Packets		Bytes		Errors		Drops	
#	Receive	Transmit	Receive	Transmit	Receive	Transmit	Receive	Transmit
1	0	0	0	0	0	0	0	0
2	0	0	0	0	0	0	0	0
3	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0
5	0	0	0	0	0	0	0	0
6	0	0	0	0	0	0	0	0
7	0	0	0	0	0	0	0	0
8	324361	46734	33627739	6020273	7	0	7	0
9	0	0	0	0	0	0	0	0
10	0	0	0	0	0	0	0	0
11	0	0	0	0	0	0	0	0
12	0	0	0	0	0	0	0	0
13	0	0	0	0	0	0	0	0
14	0	0	0	0	0	0	0	0
15	0	0	0	0	0	0	0	0
16	0	0	0	0	0	0	0	0
17	0	0	0	0	0	0	0	0
18	0	0	0	0	0	0	0	0
19	0	0	0	0	0	0	0	0
20	0	0	0	0	0	0	0	0
21	0	0	0	0	0	0	0	0
22	0	0	0	0	0	0	0	0
23	0	0	0	0	0	0	0	0
24	0	0	0	0	0	0	0	0

Parameters description:

Packet:

Transmit:

The counting number of the packet transmitted.

Receive:

The counting number of the packet received.

Bytes:

Transmit:

Total transmitted bytes.

Receive:

Total received bytes.

Error:

Transmit:

Number of bad packets transmitted.

Receive:

Number of bad packets received.

Drops:

Transmit:

Number of packets transmitted drop.

Receive:

Number of packets received drop.

Auto-refresh:

The simple counts will be refreshed automatically on the UI screen.

Refresh:

The simple counts will be refreshed manually when user use mouse to click on **"Refresh"** button.

Clear:

The simple counts will be reset to zero when user use mouse to click on "Clear" button.

4.3.4 Detail Counter

The function of Detail Counter collects any information and provides the counting about the traffic of the port, no matter the packet is good or bad.

In below figure, the window can show only one port counter information at the same time. To see another port's counter, you have to pull down the list of Select, then you will see the figures displayed about the port you had chosen.

Each data field has 20-digit long. If the counting is overflow, the counter will be reset and restart counting. The data is updated every time interval defined by the user. The valid range is 3 to 10 seconds. The Refresh Interval is used to set the update frequency. Default update time is 3 seconds.

Function name:

Detail Counter

Function description:

Display the detailed counting number of each port's traffic. The window can show all counter information of each port at one time.

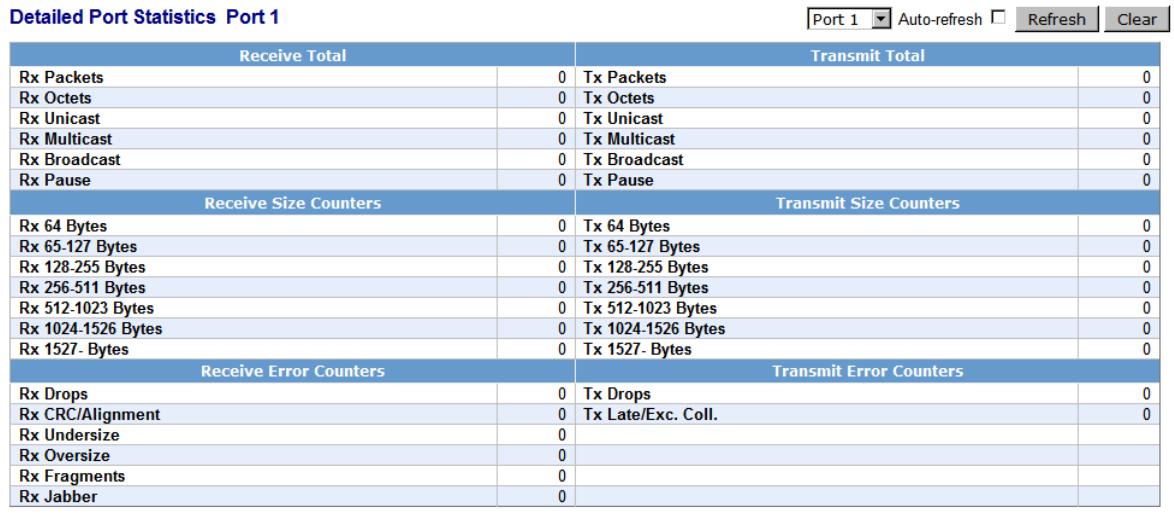

Detailed Port Statistics Port 1

Port 1 Auto-refresh Refresh Clear

Receive Total		Transmit Total	
Rx Packets	0	Tx Packets	0
Rx Octets	0	Tx Octets	0
Rx Unicast	0	Tx Unicast	0
Rx Multicast	0	Tx Multicast	0
Rx Broadcast	0	Tx Broadcast	0
Rx Pause	0	Tx Pause	0
Receive Size Counters		**Transmit Size Counters**	
Rx 64 Bytes	0	Tx 64 Bytes	0
Rx 65-127 Bytes	0	Tx 65-127 Bytes	0
Rx 128-255 Bytes	0	Tx 128-255 Bytes	0
Rx 256-511 Bytes	0	Tx 256-511 Bytes	0
Rx 512-1023 Bytes	0	Tx 512-1023 Bytes	0
Rx 1024-1526 Bytes	0	Tx 1024-1526 Bytes	0
Rx 1527- Bytes	0	Tx 1527- Bytes	0
Receive Error Counters		**Transmit Error Counters**	
Rx Drops	0	Tx Drops	0
Rx CRC/Alignment	0	Tx Late/Exc. Coll.	0
Rx Undersize	0		
Rx Oversize	0		
Rx Fragments	0		
Rx Jabber	0		

Parameter description:

Rx Packets:

The counting number of the packet received.

RX Octets:

Total received bytes.

Rx High Priority Packets:

Number of Rx packets classified as high priority.

Rx Low Priority Packets:

Number of Rx packets classified as low priority.

Rx Broadcast:

Show the counting number of the received broadcast packet.

Rx Multicast:

Show the counting number of the received multicast packet.

Tx Packets:

The counting number of the packet transmitted.

TX Octets:

Total transmitted bytes.

Tx High Priority Packets:

Number of Tx packets classified as high priority.

Tx Low Priority Packets:

Number of Tx packets classified as low priority.

Tx Broadcast:

Show the counting number of the transmitted broadcast packet.

Tx Multicast:

Show the counting number of the transmitted multicast packet.

Rx 64 Bytes:

Number of 64-byte frames in good and bad packets received.

Rx 65-127 Bytes:

Number of 65 ~ 126-byte frames in good and bad packets received.

Rx 128-255 Bytes:

Number of 127 ~ 255-byte frames in good and bad packets received.

Rx 256-511 Bytes:

Number of 256 ~ 511-byte frames in good and bad packets received.

Rx 512-1023 Bytes:

Number of 512 ~ 1023-byte frames in good and bad packets received.

Rx 1024-Bytes:

Number of 1024-max_length-byte frames in good and bad packets received.

Tx 64 Bytes:

Number of 64-byte frames in good and bad packets transmitted.

Tx 65-127 Bytes:

Number of 65 ~ 126-byte frames in good and bad packets transmitted.

Tx 128-255 Bytes:

Number of 127 ~ 255-byte frames in good and bad packets transmitted.

Tx 256-511 Bytes:

Number of 256 ~ 511-byte frames in good and bad packets transmitted.

Tx 512-1023 Bytes:

Number of 512 ~ 1023-byte frames in good and bad packets transmitted.

Tx 1024-Bytes:

Number of 1024-max_length-byte frames in good and bad packets transmitted.

Rx CRC/Alignment:

Number of Alignment errors and CRC error packets received.

Rx Undersize:

Number of short frames (<64 Bytes) with valid CRC.

Rx Oversize:

Number of long frames(according to max_length register) with valid CRC.

Rx Fragments:

Number of short frames (< 64 bytes) with invalid CRC.

Rx Jabber:

Number of long frames(according tomax_length register) with invalid CRC.

Rx Drops:

Frames dropped due to the lack of receiving buffer.

Rx Errors:

Number of the error packet received.

Tx Collisions:

Number of collisions transmitting frames experienced.

Tx Drops:

Number of frames dropped due to excessive collision, late collision, or frame aging.

Tx FIFO Drops:

Number of frames dropped due to the lack of transmitting buffer.

Auto-refresh:

The detail counts will be refreshed automatically on the UI screen.

Refresh:

The detail counts will be refreshed manually when user use mouse to click on **“Refresh”** button.

Clear:

The detail counts will be reset to zero when user use mouse to click on “Clear” button.

4.3.5 Power Saving

This function provides power saving for reducing the power consumption with "ActiPHY Power Management" and "PerfectReach Power Management". It could efficiently save the switch Power when the client idle and detect the cable length to provide different power.

Function name:

Power Saving

Function description:

The function using "ActiPHY Power Management" and "PerfectReach Power Management" to save the switch’s power consumption.

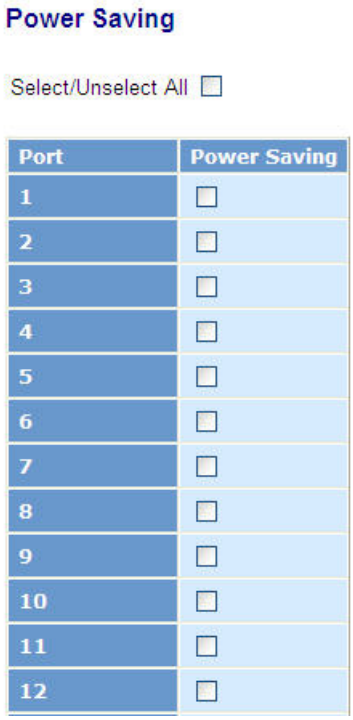

Parameter description:

Power Saving:

The parameter will enable or disable to verify switches have the ability to consider the length of any Ethernet cable connected for adjustment of power usage accordingly. Shorter lengths require less power. link-down mode removes power for each port that does not have a device attached. **Default is Disable**.

4.4 VLAN

The switch supports Tag-based VLAN (802.1Q) and Port-based VLAN. Support **4094 active VLANs and VLAN ID 1~4094**. VLAN configuration is used to partition your LAN into small ones as your demand. Properly configuring it, you can gain not only improving security and increasing performance but greatly reducing VLAN management.

4.4.1 VLAN Mode

Function name:

VLAN Mode Setting

Function description:

The VLAN Mode Selection function includes five modes: Port-based, Tag- based, Metro Mode, Double-tag and Disable, you can choose one of them by pulling down list and selecting an item. Then, click <**Apply**> button, the settings will take effect immediately.

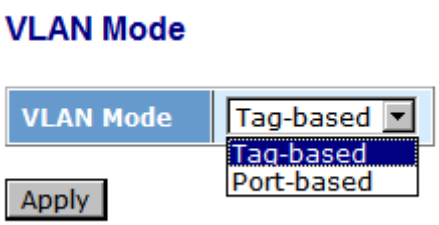

Parameter description:

VLAN Mode:

Port-based:

Port-based VLAN is defined by port. Any packet coming in or outgoing from any one port of a port-based VLAN will be accepted. No filtering criterion applies in port-based VLAN. The only criterion is the physical port you connect to. For example, for a port-based VLAN named PVLAN-1 contains port members Port 1&2&3&4. If you are on the port 1, you can communicate with port 2&3&4. If you are on the port 5, then you cannot talk to them. Each port-based VLAN you built up must be assigned a group name. This switch can support up to maximal 24 port-based VLAN groups.

Tag-based:

Tag-based VLAN identifies its member by VID. This is quite different from port-based VLAN. If there are any more rules in ingress filtering list or egress filtering list, the packet will be screened with more filtering criteria to determine if it can be forwarded. The switch supports supplement of 802.1q. For more details, please see the section VLAN in Chapter 3.

Each tag-based VLAN you built up must be assigned VLAN name and VLAN ID. **Valid VLAN ID is 1-4094.** User can create total up to **4094 Tag VLAN groups.**

4.4.2 Tag-based Group

Function name:

Tag-based Group Configuration

Function description:

It shows the information of existed Tag-based VLAN Groups, You can also easily create, edit and delete a Tag-based VLAN group by pressing **<Add>**, **<Edit>** and **<Delete>** function buttons. User can add a new VLAN group by inputting a new VLAN name and VLAN ID.

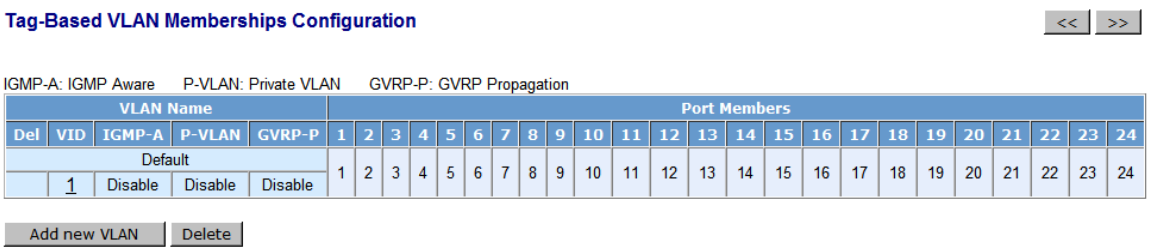
Tag-Based VLAN Memberships Configuration
<< >>
IGMP-A: IGMP Aware P-VLAN: Private VLAN GVRP-P: GVRP Propagation
VLAN Name
Port Members
Del VID IGMP-A P-VLAN GVRP-P 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
Default
1 Disable Disable Disable 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
Add new VLAN
Delete

Parameter description:

VLAN Name:

The name defined by administrator is associated with a VLAN group. **Valid letters are A-Z, a-z, 0-9, " - " and "_".** The maximal length is 15 characters.

VLAN ID:

VLAN identifier. Each tag-based VLAN group has a unique VID. It appears only in tag-based and Double-tag mode.

IGMP Proxy:

IGMP proxy enables the switch to issue IGMP host messages on behalf of hosts that the system discovered through standard IGMP interfaces. The system acts as a proxy for its hosts. This switch can be set IGMP function **"Enable" or "Disable"** by VLAN group. If the VLAN group IGMP proxy is disabled, the switch will stop the exchange of IGMP messages in the VLAN group members. If the VLAN group IGMP proxy is enabled, the switch will support the exchange of IGMP messages in the VLAN group members and follow up IGMP proxy router port configuration, which connects to a router closer to the root of the tree. This interface is the upstream interface. The router on the upstream interface should be running IGMP. You enable IGMP on the interfaces that connect the system to its hosts that are farther away from the root of the tree. These interfaces are known as downstream interfaces. Please refer to 3-15-1 for detail IGMP Proxy function description.

Member Port:

This is used to enable or disable if a port is a member of the new added VLAN, "Enable" means it is a member of the VLAN. Just tick the check box (☑) beside the port x to enable it.

Add new VLAN:

Please click on **<Add new VLAN>** to create a new Tag-based VLAN. Input the VLAN name as well as VID, configure the SYM-VLAN function and choose the member by ticking the check box beside the port No., then, press the **<Apply>** button to have the setting taken effect.

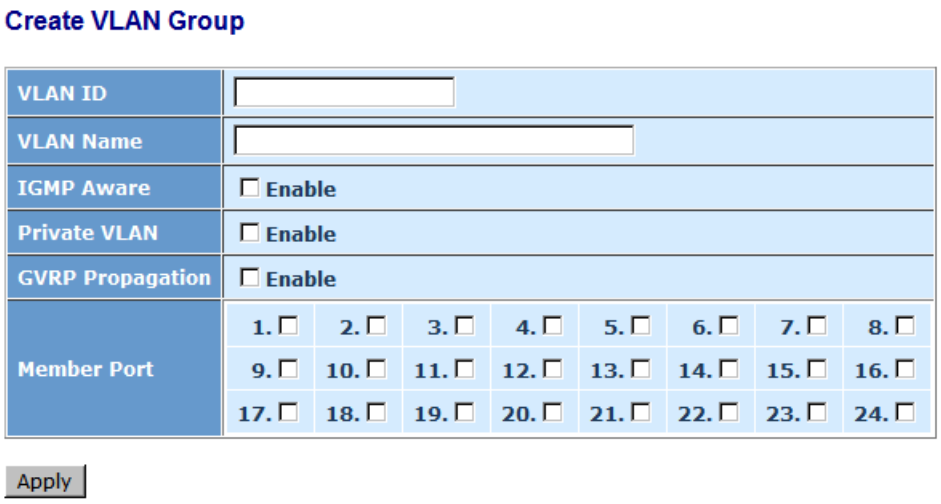

Delete Group:

Just press the **<Delete>** button to remove the selected group entry from the Tag-based group table.

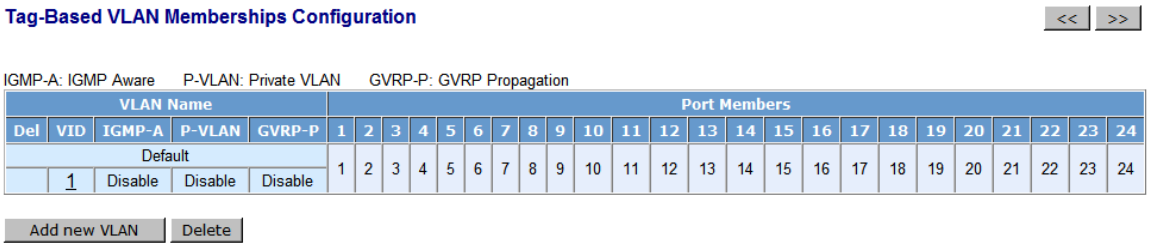
Tag-Based VLAN Memberships Configuration
<< >>
IGMP-A: IGMP Aware P-VLAN: Private VLAN GVRP-P: GVRP Propagation
VLAN Name
Port Members
Del VID IGMP-A P-VLAN GVRP-P 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
Default
1 Disable Disable Disable 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
Add new VLAN
Delete

Note: If you need to use PVLAN(Private VLAN) function on Switch, you need follow the process as below:

a. Create a VLAN as primary VLAN and the VLAN ID is 2 and evokes the Private VLAN to enable Private VLAN service.

b. Assign port member to the VLAN2

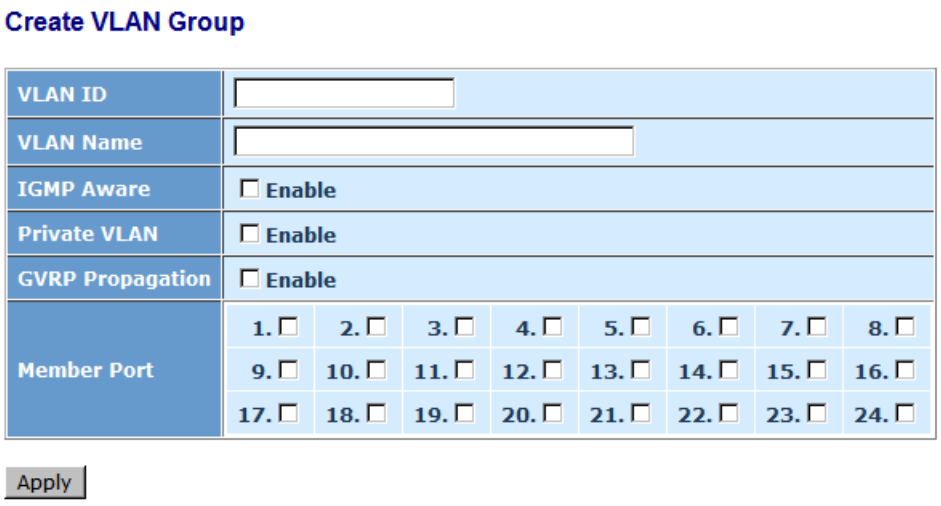

4.4.3 Port-based Group

Function name:

Port-based Group Configuration

Function description:

It shows the information of the existed Port-based VLAN Groups. You can easily create, edit and delete a Port-based VLAN group by pressing **<Add>**, **<Edit>** and **<Delete>** function buttons. User can add a new VLAN group by inputting a new VLAN name.

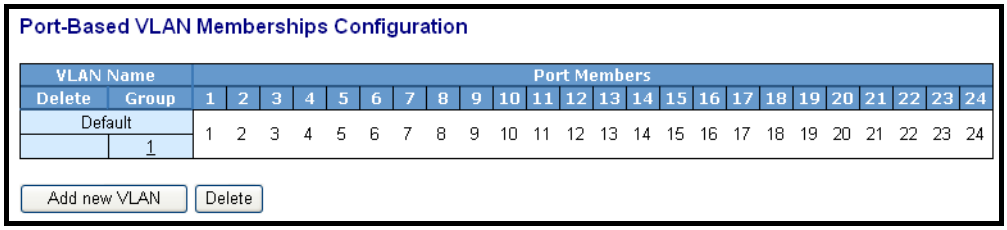
Port-Based VLAN Memberships Configuration
VLAN Name
Port Members
Delete
Group
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
Default
1
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
Add new VLAN
Delete

Parameter description:

VLAN Name:

The name defined by administrator is associated with a VLAN group. **Valid letters are A-Z, a-z, 0-9, " - " and "_"**. The maximal length is 15 characters.

Member Port:

This is used to enable or disable if a port is a member of the new added VLAN, "Enable" means it is a member of the VLAN. Just tick the check box (☑) beside the port x to enable it.

Add new VLAN:

Create a new Port-based VLAN. Input the VLAN name and choose the member by ticking the check box beside the port No., then, press the **<Apply>** button to have the setting taken effect.

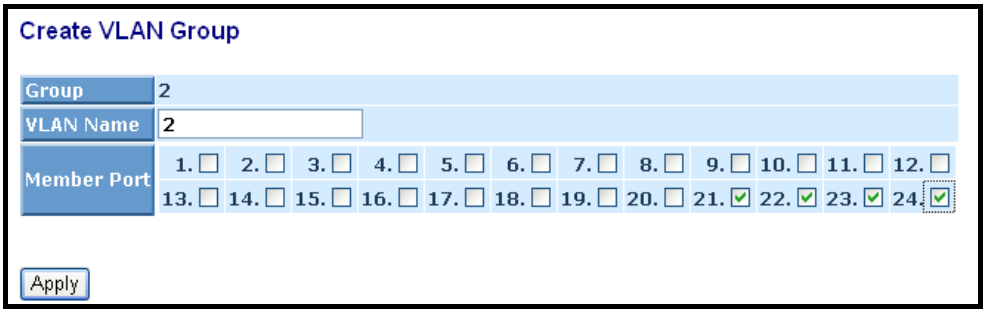

Delete Group:

Just press the **<Delete>** button to remove the selected group entry from the Port-based group table.

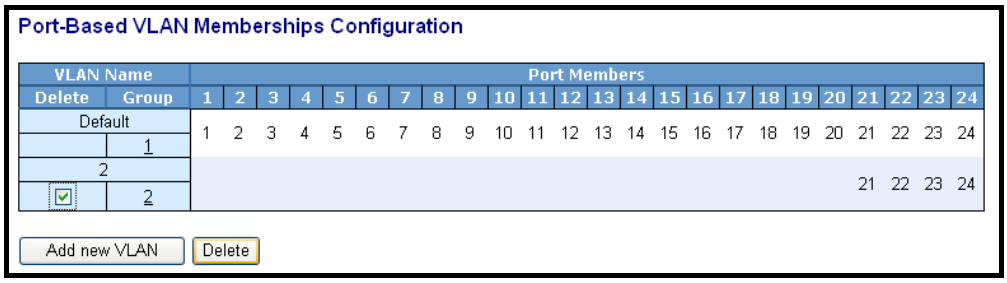
Port-Based VLAN Memberships Configuration
VLAN Name
Port Members
Delete
Group
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
Default
1
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
2
2
21 22 23 24
Add new VLAN
Delete

4.4.4 Ports

Function name:

VLAN Port Configuration

Function description:

In VLAN Tag Rule Setting, user can input VID number to each port. The range of VID number is from 1 to 4095. User also can choose ingress filtering rules to each port. There are two ingress filtering rules which can be applied to the switch. The Ingress Filtering Rule 1 is “forward only packets with VID matching this port’s configured VID”. The Ingress Filtering Rule 2 is “drop untagged frame”. You can also select the Role of each port as Access, Trunk, or Hybrid.

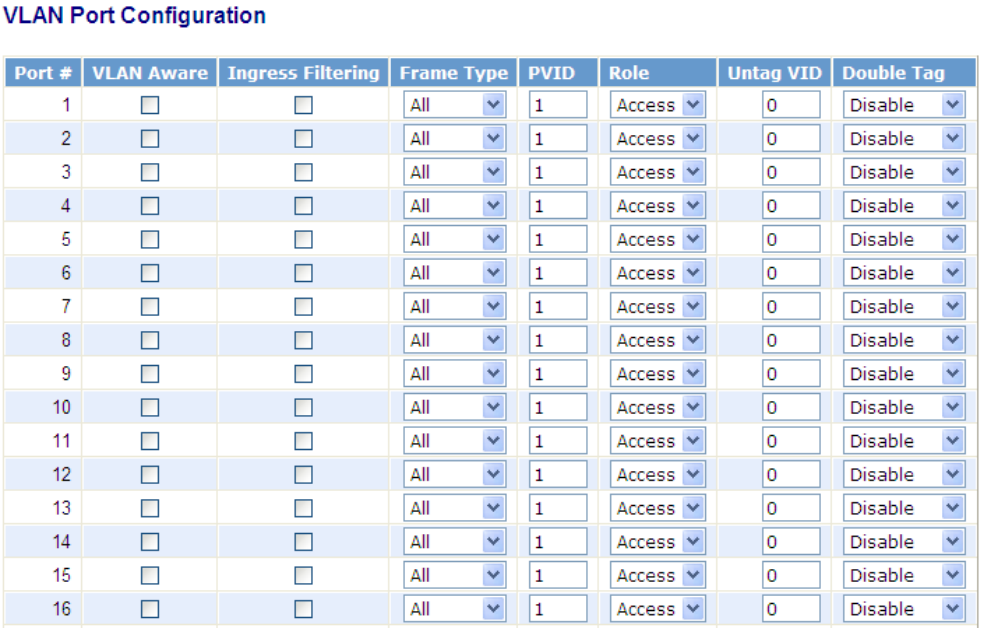
VLAN Port Configuration
Port # VLAN Aware Ingress Filtering Frame Type PVID Role Untag VID Double Tag
1 All 1 Access 0 Disable
2 All 1 Access 0 Disable
3 All 1 Access 0 Disable
4 All 1 Access 0 Disable
5 All 1 Access 0 Disable
6 All 1 Access 0 Disable
7 All 1 Access 0 Disable
8 All 1 Access 0 Disable
9 All 1 Access 0 Disable
10 All 1 Access 0 Disable
11 All 1 Access 0 Disable
12 All 1 Access 0 Disable
13 All 1 Access 0 Disable
14 All 1 Access 0 Disable
15 All 1 Access 0 Disable
16 All 1 Access 0 Disable

Parameter description:

Port 1-24:

Port number.

VLAN Aware:

Based on IEEE 802.1Q VLAN tag to forward packet

Ingress Filtering:

Discard other VLAN group packets, only forward this port joined VLAN group packets

Frame Type:

All: Forward all tagged and untagged packets

Tagged: Forward tagged packets only and discard untagged packets

PVID:

This PVID range will be 1-4095. Before you set a number x as PVID, you have to create a Tag-based VLAN with VID x. For example, if port x receives an untagged packet, the switch will apply the PVID (assume as VID y) of port x to tag this packet, the packet then will be forwarded as the tagged packet with VID y.

Role:

This is an egress rule of the port. Here you can choose Access, Trunk or Hybrid. Trunk means the outgoing packets must carry VLAN tag header. Access means the outgoing packets carry no VLAN tag header. If packets have double VLAN tags, one will be dropped and the other will still be left. As to Hybrid, it is similar to Trunk, and both of them will tag-out. When the port is set to Hybrid, its packets will be untagged out if the VID of the outgoing packets with tag is the same as the one in the field of Untag VID of this port.

Untag VID:

Valid range is 1~4095. It works only when Role is set to Hybrid.

Double Tag:

Double-tag mode belongs to the tag-based mode, however, it would treat all frames as the untagged ones, which means that tag with PVID will be added into all packets. Then, these packets will be forwarded as Tag-based VLAN. So, the incoming packets with tag will become the double-tag ones. Scroll to enable the function and **default is Disable**.

4.4.5 Port Isolation

Function name:

Port Isolation

Function description:

Port Isolation provides for an apparatus and method to isolate ports on layer 2

switches on the same VLAN to restrict traffic flow. The apparatus comprises a switch having said plurality of ports, each port configured as a protected port or a non-protected port. An address table memory stores an address table having a destination address and port number pair. A forwarding map generator generates a forwarding map which is responsive to a destination address of a data packet. The method for isolating ports on a layer 2 switch comprises configuring each of the ports on the layer 2 switch as a protected port or a non-protected port. A destination address on an data packet is matched with a physical address on said layer 2 switch and a forwarding map is generated for the data packet based upon the destination address on the data packet. The data packet is then sent to the plurality of ports pursuant to the forwarding map generated based upon whether the ingress port was configured as a protected or non-protected port.

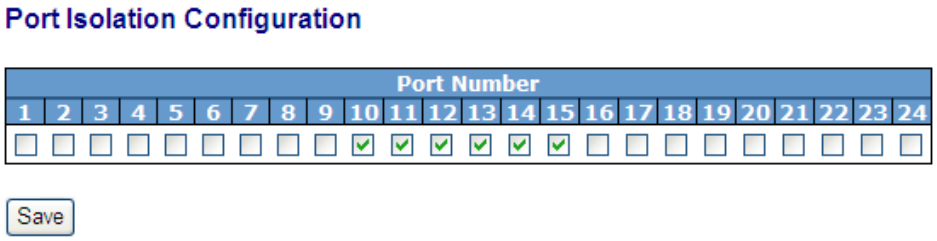

Parameter description:

Port 1-24:

Port number. To evoke the port which you want to enable the Port Isolation service.

Save:

Press the "**Save**" to complete the PVLAN configuration process.

4.4.6 Management

Function name:

Management

Function description:

To assign a specific VLAN for management purpose.

Parameter description:

VID: Specific Management VLAN ID.

4.5 MAC

MAC Table Configuration gathers many functions, including MAC Table Information, MAC Table Maintenance, Static Forward, Static Filter and MAC Alias, which cannot be categorized to some function type. They are described below.

4.5.1 Mac Address Table

Function name:

MAC Address Table Information

Function Description:

This function can allow the user to set up the processing mechanism of MAC Table. An idle MAC address exceeding MAC Address Age-out Time will be removed from the MAC Table. **The range of Age-out Time is 10-1000000 seconds**, and the setup of this time will have no effect on static MAC addresses.

In addition, the learning limit of MAC maintenance is able to limit the amount of MAC that each port can learn.

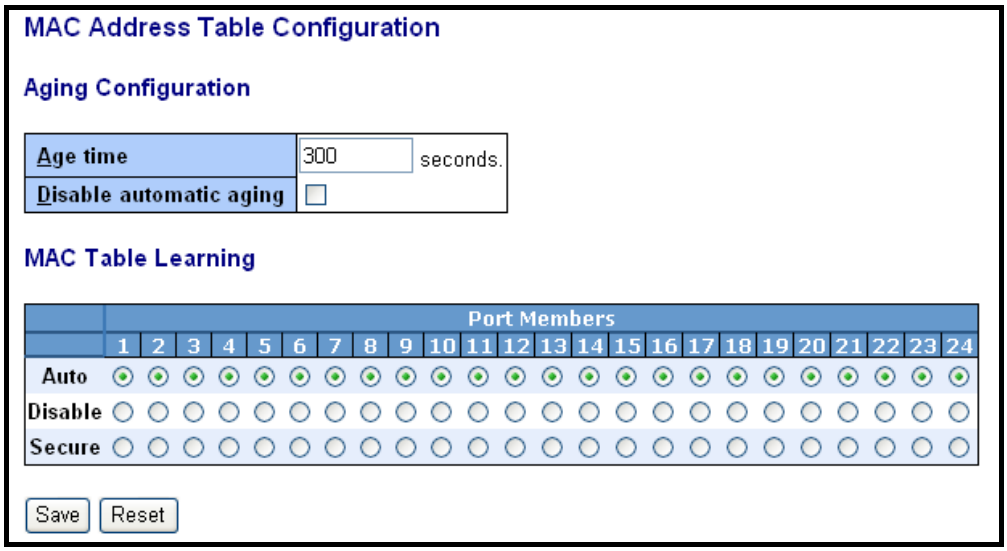

Parameter description:

Aging Time:

Delete a MAC address idling for a period of time from the MAC Table, which will not affect static MAC address. Range of MAC Address Aging Time is 10-1000000 seconds. **The default Aging Time is 300 seconds**.

Disable automatic aging:

Stop the MAC table aging timer, the learned MAC address will not age out automatically

Auto:

Enable this port MAC address dynamic learning mechanism.

Disable:

Disable this port MAC address dynamic learning mechanism, only support static MAC address setting.

Secure:

Disable this port MAC address dynamic learning mechanism and copy the dynamic learning packets to CPU

Save:

Save MAC Address Table configuration

Reset:

Reset MAC Address Table configuration

4.5.2 Static Filter

Function name:

Static Filter

Function Description:

Static Filter is a function that denies the packet forwarding if the packet's MAC Address is listed in the filtering Static Filter table. User can very easily maintain the table by filling in MAC Address, VID (VLAN ID) and Alias fields individually. User also can delete the existed entry by clicking **<Delete>** button.

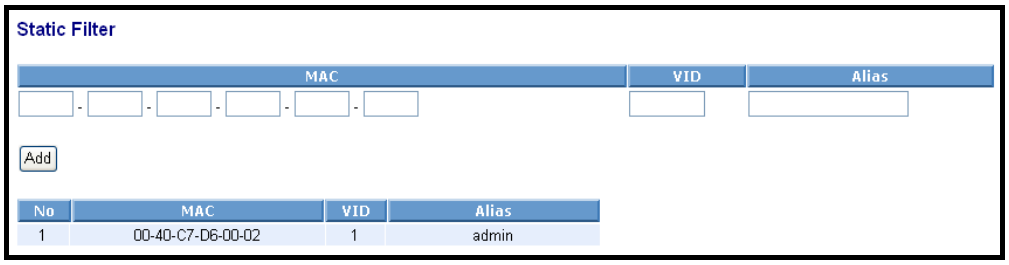

Parameter description:

MAC:

It is a six-byte long Ethernet hardware address and usually expressed by hex and separated by hyphens. For example, 00 – 40 - C7 - D6 – 00 - 02

VID:

VLAN identifier. This will be filled only when tagged VLAN is applied. Valid range is 1 ~ 4094.

Alias:

MAC alias name you assign.

4.5.3 Static Forward

Function Name:

Static Forward

Function Description:

Static Forward is a function that allows the user in the static forward table to access a

specified port of the switch. Static Forward table associated with a specified port of a switch is set up by manually inputting MAC address and its alias name.

When a MAC address is assigned to a specific port, all of the switch's traffics sent to this MAC address will be forwarded to this port.

For adding a MAC address entry in the allowed table, you just need to fill in four parameters: MAC address, associated port, VID and Alias. Just select the existed MAC address entry you want and click **<Delete>** button, you also can remove it.

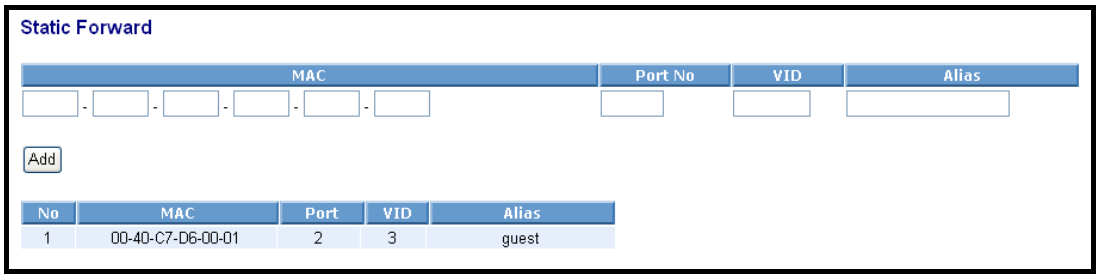

Parameter description:

MAC:

It is a six-byte long Ethernet hardware address and usually expressed by hex and separated by hyphens. For example, 00 – 40 - C7 - D6 – 00 - 01

Port No:

Port number of the switch. It is 1 ~24.

VID:

VLAN identifier. This will be filled only when tagged VLAN is applied. Valid range is 1 ~ 4094.

Alias:

MAC alias name you assign.

4.5.4 MAC Alias

Function name:

MAC Alias

Function description:

MAC Alias function is used to let you assign MAC address a plain English name. This will help you tell which MAC address belongs to which user in the illegal access report. At the initial time, it shows all pairs of the existed alias name and MAC address.

There are three MAC alias functions in this function folder, including MAC Alias Add, MAC Alias Edit and MAC Alias Delete. You can click **<Create/Edit>** button to add/modify a new or an existed alias name for a specified MAC address, or mark an existed entry to delete it. Alias name must be composed of A-Z, a-z and 0-9 only and has a maximal length of 15 characters.

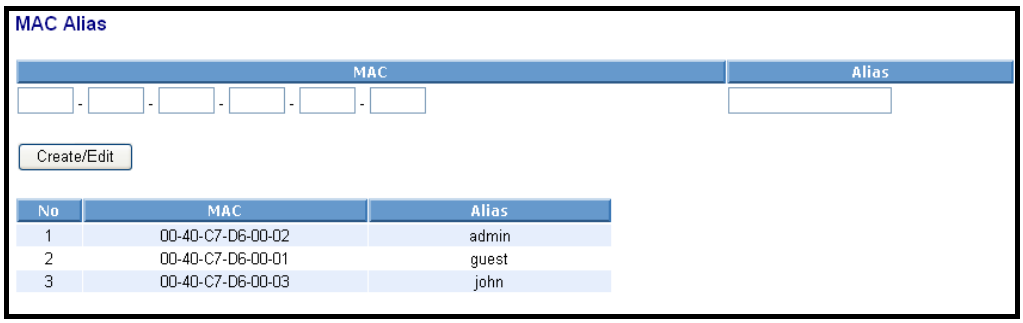

Parameter description:

MAC Address:

It is a six-byte long Ethernet hardware address and usually expressed by hex and separated by hyphens. For example, 00 – 40 - C7 - D6 – 00 - 01

Alias:

MAC alias name you assign.

Note: If there are too many MAC addresses learned in the table, we recommend you inputting the MAC address and alias name directly.

4.5.5 MAC Table

Function name:

Dynamic MAC Table

Function Description:

Display the static or dynamic learning MAC entry and the state for the selected port.

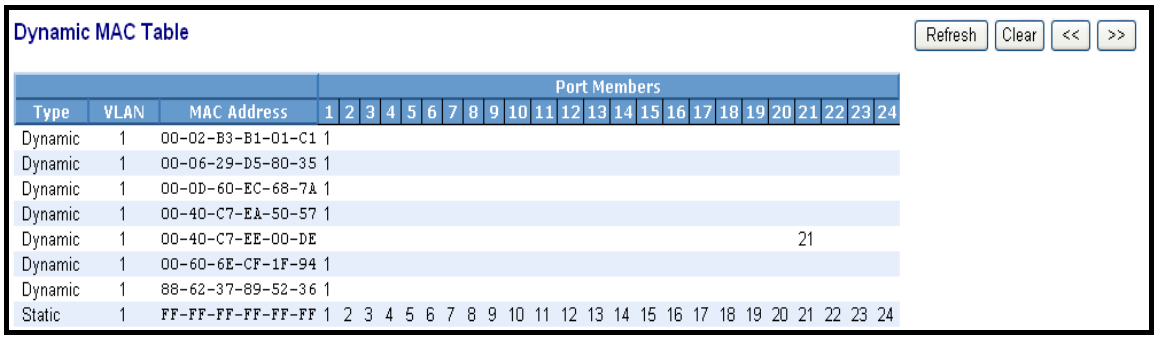

Parameter description:

Type:

Dynamic or Static.

VLAN:

VLAN identifier. This will be filled only when tagged VLAN is applied. Valid range is 1 ~ 4094.

MAC address:

Display the MAC address of one entry you selected from the searched MAC entries table.

Port:

The port that exists in the searched MAC Entry.

Refresh:

Refresh function can help you to see current MAC Table status.

Clear:

To clear the selected entry.

Previous Page:

Move to the previous page.

Next Page:

Move to the next page.

4.6 GVRP

GVRP is an application based on Generic Attribute Registration Protocol (GARP), mainly used to automatically and dynamically maintain the group membership information of the VLANs. The GVRP offers the function providing the VLAN registration service through a GARP application. It makes use of GARP Information Declaration (GID) to maintain the

ports associated with their attribute database and GARP Information Propagation (GIP) to communicate among switches and end stations. With GID information and GIP, GVRP state machine maintain the contents of Dynamic VLAN Registration Entries for each VLAN and propagate these information to other GVRP-aware devices to setup and update their knowledge database, the set of VLANs associated with currently active members, and through which ports these members can be reached.

In GVRP Configuration function folder, there are three functions supported, including GVRP Config, GVRP Counter and GVRP Group explained below.

4.6.1 GVRP Configuration

Function name:

GVRP Configuration

Function description:

In the function of GVRP Config, it is used to configure each port's GVRP operation mode, in which there are seven parameters needed to be configured described below.

GVRP Configuration

GVRP State: Disabled Apply

Port	Join Time	Leave Time	LeaveAll Time	Default Applicant Mode	Default Registrar Mode	Restricted Mode
1	20	60	1000	Normal	Normal	Disabled
2	20	60	1000	Normal	Normal	Disabled
3	20	60	1000	Normal	Normal	Disabled
4	20	60	1000	Normal	Normal	Disabled
5	20	60	1000	Normal	Normal	Disabled
6	20	60	1000	Normal	Normal	Disabled
7	20	60	1000	Normal	Normal	Disabled
8	20	60	1000	Normal	Normal	Disabled
9	20	60	1000	Normal	Normal	Disabled
10	20	60	1000	Normal	Normal	Disabled
11	20	60	1000	Normal	Normal	Disabled
12	20	60	1000	Normal	Normal	Disabled
13	20	60	1000	Normal	Normal	Disabled
14	20	60	1000	Normal	Normal	Disabled
15	20	60	1000	Normal	Normal	Disabled
16	20	60	1000	Normal	Normal	Disabled
17	20	60	1000	Normal	Normal	Disabled
18	20	60	1000	Normal	Normal	Disabled
19	20	60	1000	Normal	Normal	Disabled
20	20	60	1000	Normal	Normal	Disabled
21	20	60	1000	Normal	Normal	Disabled
22	20	60	1000	Normal	Normal	Disabled
23	20	60	1000	Normal	Normal	Disabled
24	20	60	1000	Normal	Normal	Disabled

Apply

Parameter description:

GVRP State:

This function is simply to let you enable or disable GVRP function. You can pull down the list and click the **<Downward>** arrow key to choose “Enable” or “Disable”. Then, click the **<Apply>** button, the system will take effect immediately.

Join Time:

Used to declare the Join Time in unit of centisecond. Valid time range: 20 –100 centisecond, **Default: 20 centisecond.**

Leave Time:

Used to declare the Leave Time in unit of centisecond. Valid time range: 60 –300 centisecond, **Default: 60 centisecond.**

Leave All Time:

A time period for announcement that all registered device is going to be de-registered. If someone still issues a new join, then a registration will be kept in the switch. Valid range: 1000-5000 unit time, **Default: 1000 unit time.**

Default Applicant Mode:

The mode here means the type of participant. There are two modes, normal participant and non-participant, provided for the user's choice.

Normal:

It is Normal Participant. In this mode, the switch participates normally in GARP protocol exchanges. The default setting is Normal.

Non-Participant:

It is Non-Participant. In this mode, the switch does not send or reply any GARP messages. It just listens messages and reacts for the received GVRP BPDU.

Default Registrar Mode:

The mode here means the type of Registrar. There are three types of parameters for registrar administrative control value, normal registrar, fixed registrar and forbidden registrar, provided for the user's choice.

Normal:

It is Normal Registration. The Registrar responds normally to incoming GARP messages. The default setting is Normal.

Fixed:

It is Registration Fixed. The Registrar ignores all GARP messages, and all members remain in the registered (IN) state.

Forbidden:

It is Registration Forbidden. The Registrar ignores all GARP messages, and all members remain in the unregistered (EMPTY) state.

Restricted Mode:

This function is used to restrict dynamic VLAN be created when this port received GVRP PDU. There are two modes, disable and enable, provided for the user's choice.

Disabled:

In this mode, the switch dynamic VLAN will be created when this port received GVRP PDU. The default setting is Normal.

Enabled:

In this mode, the switch does not create dynamic VLAN when this port received GVRP PDU. Except received dynamic VLAN message of the GVRP PDU is an existed static VLAN in the switch, this port will be added into the static VLAN members dynamically.

4.6.2 GVRP Counter

Function name:

GVRP Counter

Function description:

All GVRP counters are mainly divided into Received and Transmitted two categories to let you monitor the GVRP actions. Actually, they are GARP packets.

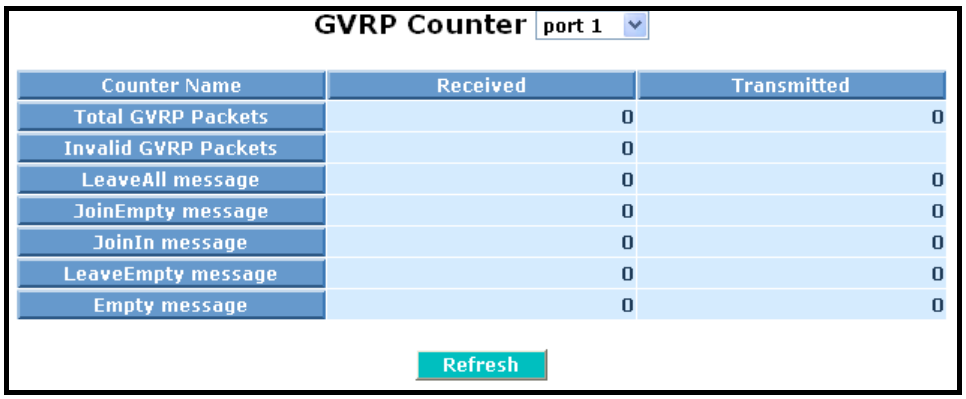

Parameter description:

Received:

Total GVRP Packets:

Total GVRP BPDU is received by the GVRP application.

Invalid GVRP Packets:

Number of invalid GARP BPDU is received by the GARP application.

LeaveAll Message Packets:

Number of GARP BPDU with Leave All message is received by the GARP application.

JoinEmpty Message Packets:

Number of GARP BPDU with Join Empty message is received by the GARP application.

JoinIn Message Packets:

Number of GARP BPDU with Join In message is received by the GARP application.

LeaveEmpty Message Packets:

Number of GARP BPDU with Leave Empty message is received by the GARP application.

Empty Message Packets:

Number of GARP BPDU with Empty message is received by the GARP application.

Transmitted:

Total GVRP Packets:

Total GARP BPDU is transmitted by the GVRP application.

Invalid GVRP Packets:

Number of invalid GARP BPDU is transmitted by the GVRP application.

LeaveAll Message Packets:

Number of GARP BPDU with Leave All message is transmitted by the GARP application.

JoinEmpty Message Packets:

Number of GARP BPDU with Join Empty message is transmitted by the GARP application.

JoinIn Message Packets:

Number of GARP BPDU with Join In message is transmitted by the GARP application.

LeaveEmpty Message Packets:

Number of GARP BPDU with Leave Empty message is transmitted by the GARP application.

Empty Message Packets:

Number of GARP BPDU with Empty message is transmitted by the GARP application.

4.6.3 GVRP VLAN Group Information

Function name:

GVRP Group VLAN Information

Function description:

To show the dynamic group member and their information.

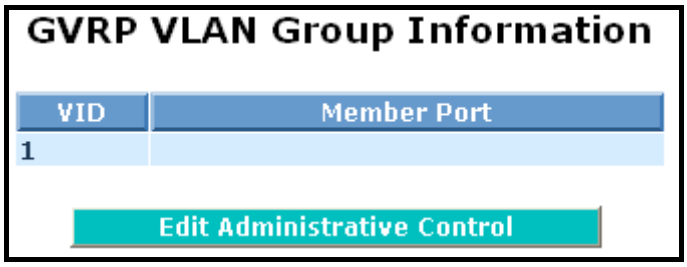

Parameter description:

VID:

VLAN identifier. When GVRP group creates, each dynamic VLAN group owns its VID. ***Valid range is 1 ~ 4094.***

Member Port:

Those are the members belonging to the same dynamic VLAN group.

Edit Administrative Control:

When you create GVRP group, you can use Administrative Control function to change Applicant Mode and Registrar Mode of GVRP group member.

4.7 QoS

The switch support four QoS queues per port with strict or weighted fair queuing scheduling. There are 24 QoS Control Lists (QCL) for advance programmable QoS classification, based on IEEE 802.1p, Ethertype, VID, IPv4/IPv6 DSCP and UDP/TCP ports and ranges.

High flexibility in the classification of incoming frames to a QoS class. The QoS classification looks for information up to Layer 4, including IPv4 and IPv6 DSCP, IPv4 TCP/UDP port numbers, and user priority of tagged frames. This QoS classification mechanism is implemented in a QoS control list (QCL). The QoS class assigned to a frame is used throughout the device for providing queuing, scheduling, and congestion control guarantees to the frame according to what was configured for that specific QoS class.

The switch support advanced memory control mechanisms providing excellent performance of all QoS classes under any traffic scenario, including jumbo frame. A super priority queue with dedicated memory and strict highest priority in the arbitration. The ingress super priority queue allows traffic recognized as CPU traffic to be received and queued for transmission to the CPU even when all the QoS class queues are congested.

4.7.1 Port QoS Configuration

Function name:

Port QoS Configuration

Function description:

To configure each port QoS behavior. Four QoS queue per port with strict or weighted fair queuing scheduling. There are 24 QoS Control Lists (QCL) for advance programmable QoS classification, based on IEEE 802.1p, Ethertype, VID, IPv4/IPv6 DSCP and UDP/TCP ports and ranges.

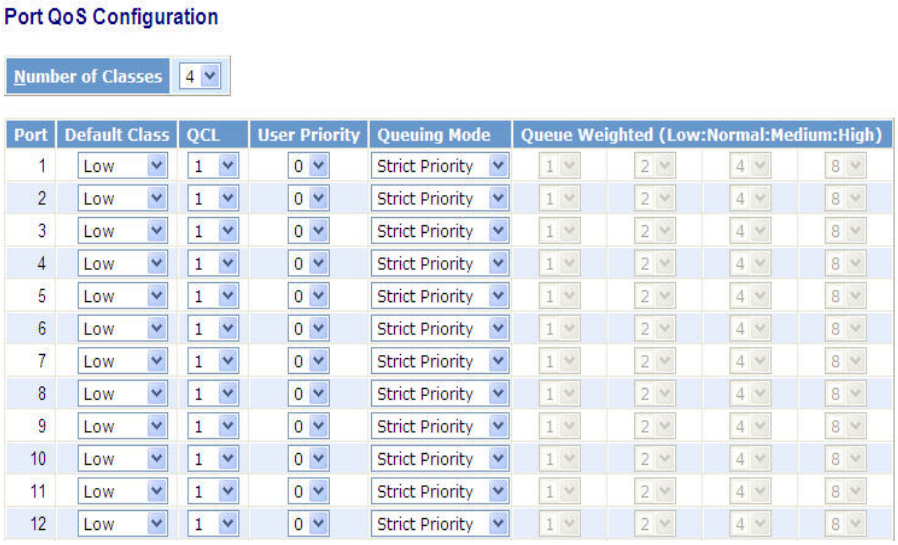
Port QoS Configuration
Number of Classes 4
Port Default Class QCL User Priority Queuing Mode Queue Weighted (Low:Normal:Medium:High)
1 Low 1 0 Strict Priority 1 2 4 8
2 Low 1 0 Strict Priority 1 2 4 8
3 Low 1 0 Strict Priority 1 2 4 8
4 Low 1 0 Strict Priority 1 2 4 8
5 Low 1 0 Strict Priority 1 2 4 8
6 Low 1 0 Strict Priority 1 2 4 8
7 Low 1 0 Strict Priority 1 2 4 8
8 Low 1 0 Strict Priority 1 2 4 8
9 Low 1 0 Strict Priority 1 2 4 8
10 Low 1 0 Strict Priority 1 2 4 8
11 Low 1 0 Strict Priority 1 2 4 8
12 Low 1 0 Strict Priority 1 2 4 8

Parameter description:

Number of Classes:

1 / 2 / 4

Port:

User can choose the port (1~24) respectively with Priority Class on Per Port Priority function.

Default Class:

User can set up High Priority or Low Priority for each port respectively.

Low / Normal / Medium / High

QCL:

The number of QCL rule 1~24, each port have to apply one of the QCL rule for QoS behavior

User priority:

The user priority value 0~7 (3 bits) is used as an index to the eight QoS class values for VLAN tagged or priority tagged frames.

Queuing Mode:

There are two Scheduling Method, Strict Priority and Weighted Fair. Default is Strict Priority. After you choose any of Scheduling Method, please click Apply button to be in operation.

Queue Weighted:

There are four queues per port and four classes weighted number (1 / 2 / 4 / 8) for each queues, you can select the weighted number when the scheduling method be set to "**Weighted Fair**" mode.

4.7.2 QoS Control List

Function name:

Qos Control List Configuration

Function description:

The switch supports four QoS queues per port with strict or weighted fair queuing scheduling. There are **24 QoS Control Lists (QCL)** for advance programmable QoS classification, based on IEEE 802.1p, Ether Type, VID, IPv4/IPv6 DSCP and UDP/TCP ports and ranges.

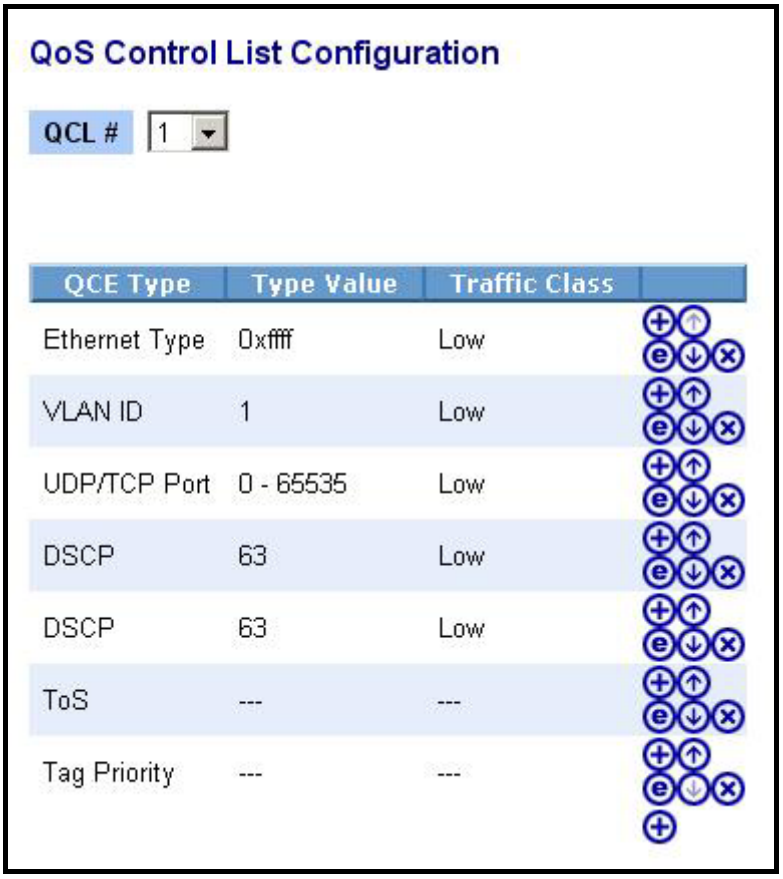

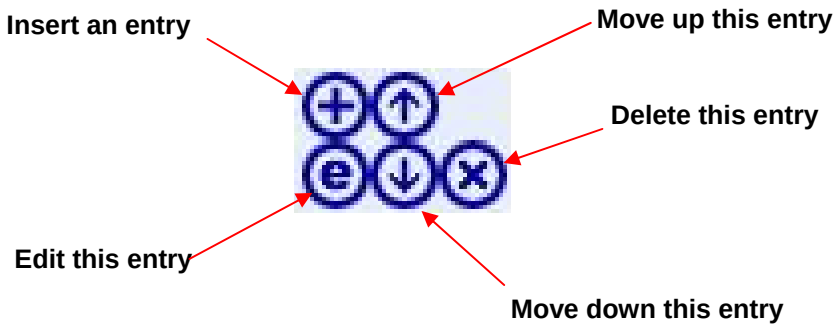

QCE Configuration:

The QCL consists of 12 QoS Control Entries (QCEs) that are searched from the top of the list to the bottom of the list for a match. The first matching QCE determines the QoS classification of the frame. The QCE ordering is therefore important for the resulting QoS classification algorithm. If no matching QCE is found, the default QoS class is used in the port QoS configuration.

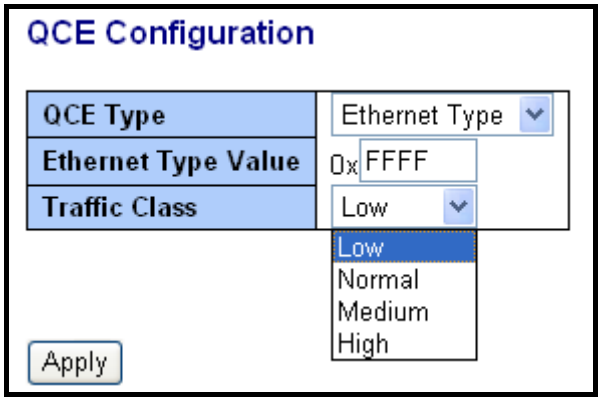

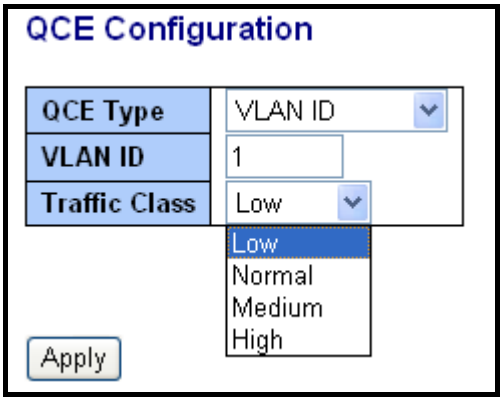

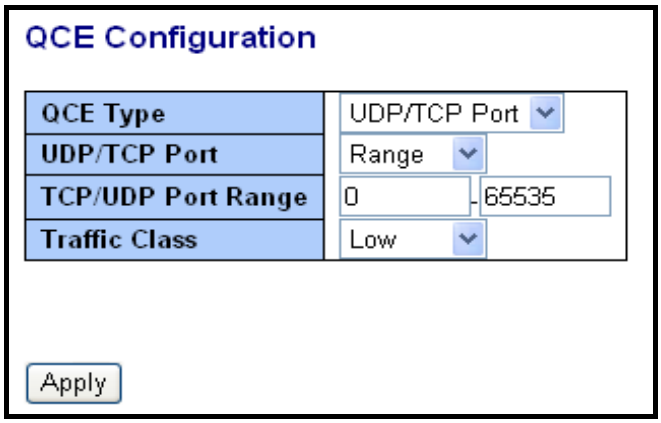
QCE Configuration
QCE Type
UDP/TCP Port
UDP/TCP Port
Range
TCP/UDP Port Range
0
65535
Traffic Class
Low
Apply

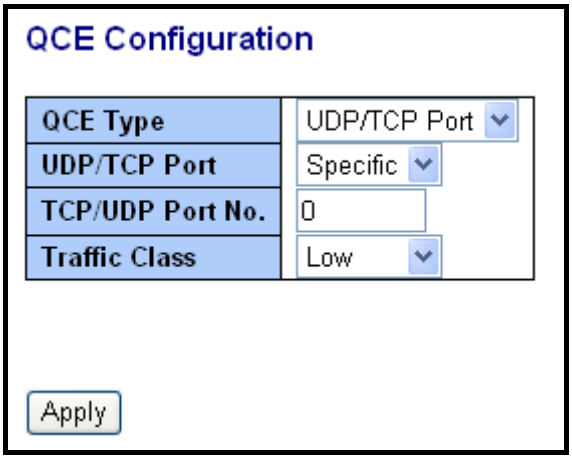
QCE Configuration
QCE Type
UDP/TCP Port
UDP/TCP Port
Specific
TCP/UDP Port No.
0
Traffic Class
Low
Apply

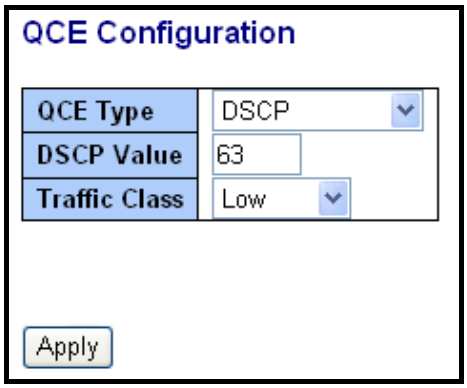
QCE Configuration
QCE Type
DSCP
DSCP Value
63
Traffic Class
Low
Apply

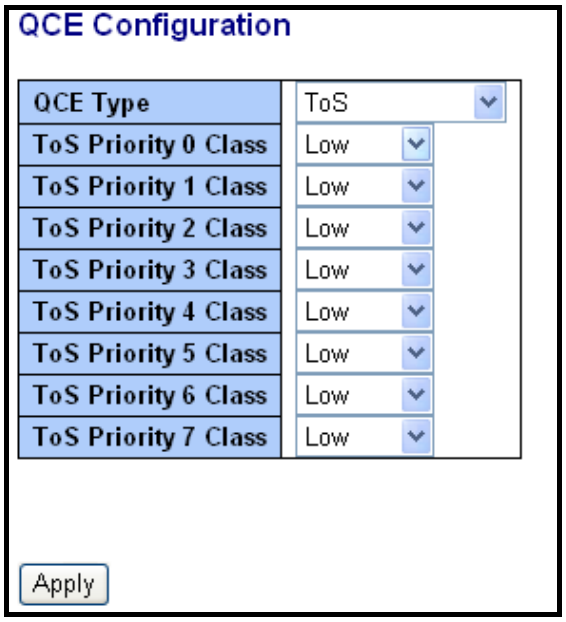

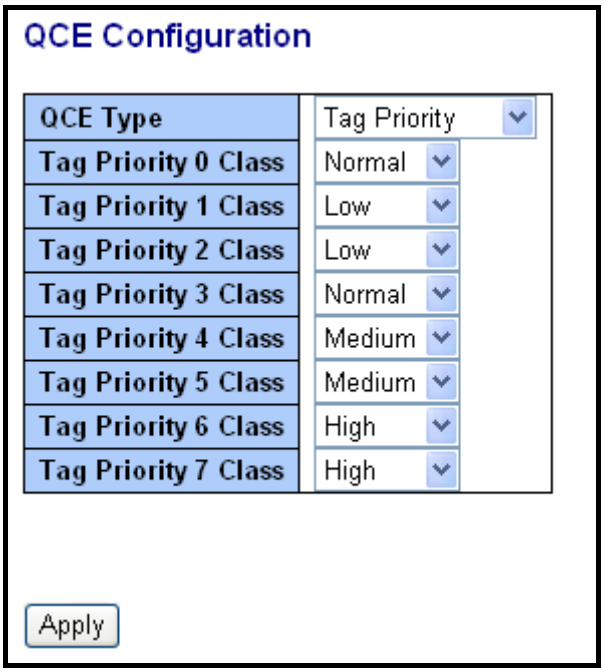

Parameter description:

QCL#:

QCL number : ***1~24***

QCE Type:

Ethernet Type / VLAN ID / UDP/TCP Port / DSCP / ToS / Tag Priority

Ethernet Type Value:

The configurable range is **0x600~0xFFFF**. Well known protocols already assigned

EtherType values. The commonly used values in the EtherType field and corresponding protocols are listed below:

Ethertype (Hexadecimal)	Protocol
0x0800	IP, Internet Protocol
0x0801	X.75 Internet
0x0802	NBS Internet
0x0803	ECMA Internet
0x0804	Chaosnet
0x0805	X.25 Level 3
0x0806	ARP, Address Resolution Protocol.
0x0808	Frame Relay ARP [RFC1701]
0x6559	Raw Frame Relay [RFC1701]
0x8035	DRARP, Dynamic RARP. RARP, Reverse Address Resolution Protocol.
0x8037	Novell Netware IPX
0x809B	EtherTalk (AppleTalk over Ethernet)
0x80D5	IBM SNA Services over Ethernet
0x 80F3	AARP, AppleTalk Address Resolution Protocol.
0x8100	IEEE Std 802.1Q - Customer VLAN Tag Type.
0x8137	IPX, Internet Packet Exchange.
0x 814C	SNMP, Simple Network Management Protocol.
0x86DD	IPv6, Internet Protocol version 6.
0x880B	PPP, Point-to-Point Protocol.
0x 880C	GSMP, General Switch Management Protocol.
0x8847	MPLS, Multi-Protocol Label Switching (unicast).
0x8848	MPLS, Multi-Protocol Label Switching (multicast).
0x8863	PPPoE, PPP Over Ethernet (Discovery Stage).
0x8864	PPPoE, PPP Over Ethernet (PPP Session Stage).
0x88BB	LWAPP, Light Weight Access Point Protocol.
0x88CC	LLDP, Link Layer Discovery Protocol.
0x8E88	EAPOL, EAP over LAN.
0x9000	Loopback (Configuration Test Protocol)
0xFFFF	reserved.

VLAN ID:

The configurable VID range:***1~4094***

UDP/TCP Port:

To select the UDP/TCP port classification method by Range or Specific.

UDP/TCP Port Range:

The configurable ports range: ***0~65535***

You can refer to following UDP/TCP port-numbers information.

http://www.iana.org/assignments/port-numbers

UDP/TCP Port No.:

The configurable specific port value: ***0~65535***

DSCP Value:

The configurable DSCP value: ***0~63***

Traffic Class:

Low / Normal / Medium / High

4.7.3 Rate Limiters

Function name:

Rate Limit Configuration

Function description:

Each port includes an ingress policer, and an egress shaper, which can limit the bandwidth of received and transmitted frames. Ingress policer or egress shaper operation is controlled per port in the Rate Limit Configuration.

Rate Limit Configuration

Port #	Ingress Enabled	Ingress Rate	Ingress Unit	Egress Enabled	Egress Rate	Egress Unit
1	☐	500	kbps	☐	500	kbps
2	☐	500	kbps	☐	500	kbps
3	☐	500	kbps	☐	500	kbps
4	☐	500	kbps	☐	500	kbps
5	☐	500	kbps	☐	500	kbps
6	☐	500	kbps	☐	500	kbps
7	☐	500	kbps	☐	500	kbps
8	☐	500	kbps	☐	500	kbps
9	☐	500	kbps	☐	500	kbps
10	☐	500	kbps	☐	500	kbps
11	☐	500	kbps	☐	500	kbps
12	☐	500	kbps	☐	500	kbps
13	☐	500	kbps	☐	500	kbps
14	☐	500	kbps	☐	500	kbps
15	☐	500	kbps	☐	500	kbps
16	☐	500	kbps	☐	500	kbps
17	☐	500	kbps	☐	500	kbps
18	☐	500	kbps	☐	500	kbps
19	☐	500	kbps	☐	500	kbps
20	☐	500	kbps	☐	500	kbps
21	☐	500	kbps	☐	500	kbps
22	☐	500	kbps	☐	500	kbps
23	☐	500	kbps	☐	500	kbps
24	☐	500	kbps	☐	500	kbps

Apply

Parameter description:

Port #:

Port number.

Ingress Enabled:

Enable to limit ingress bandwidth by ingress rate.

Ingress Rate:

The configurable ingress rate range is **500 Kbps ~ 1000000 Kbps** or **1 Mbps ~ 1000 Mbps**

Egress Unit:

There are two units for egress rate limit: **kbps / Mbps**

Egress Enabled:

Enabled to limit egress bandwidth by egress rate.

Egress Rate:

The configurable egress rate range is **500 Kbps ~ 1000000 Kbps** or **1 Mbps ~ 1000 Mbps**

Shaper Unit:

There are two units for egress rate limit: **kbps / Mbps**.

4.7.4 Storm Control

Function name:

Storm Control Configuration

Function description:

The switch supports storm ingress policer control function to limit the Flooded, Multicast and Broadcast to prevent storm event happen.

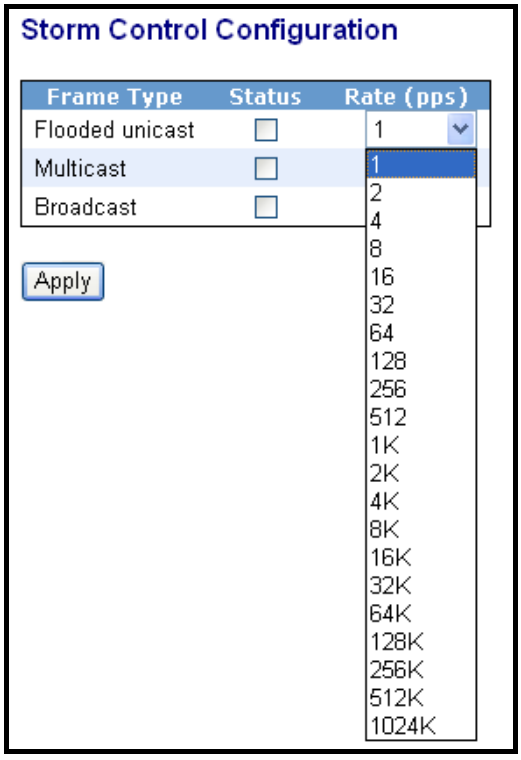

Parameter description:

Frame Type:

Three frame types of storm can be controlled: Flooded unicast / Multicast / Broadcast

Status:

Enable/Disable Selection: ☑ means enabled; ☐ means disabled

Rate(pps):

Refer to the following rate configurable value list, the unit is Packet Per Second (pps). **1 / 2 / 4 / 8 / 16 / 32 / 64 / 128 / 256 / 512 / 1K / 2K / 4K / 8K / 16K / 32K / 64K / 128K / 256K / 512K / 1024K**

4.7.5 Wizard

Function name:

Wizard

Function description:

The QCL configuration Wizard is targeted on user can easy to configure the QCL rules for QoS configuration. The wizard provide the typical network application rules, user can apply these application easily.

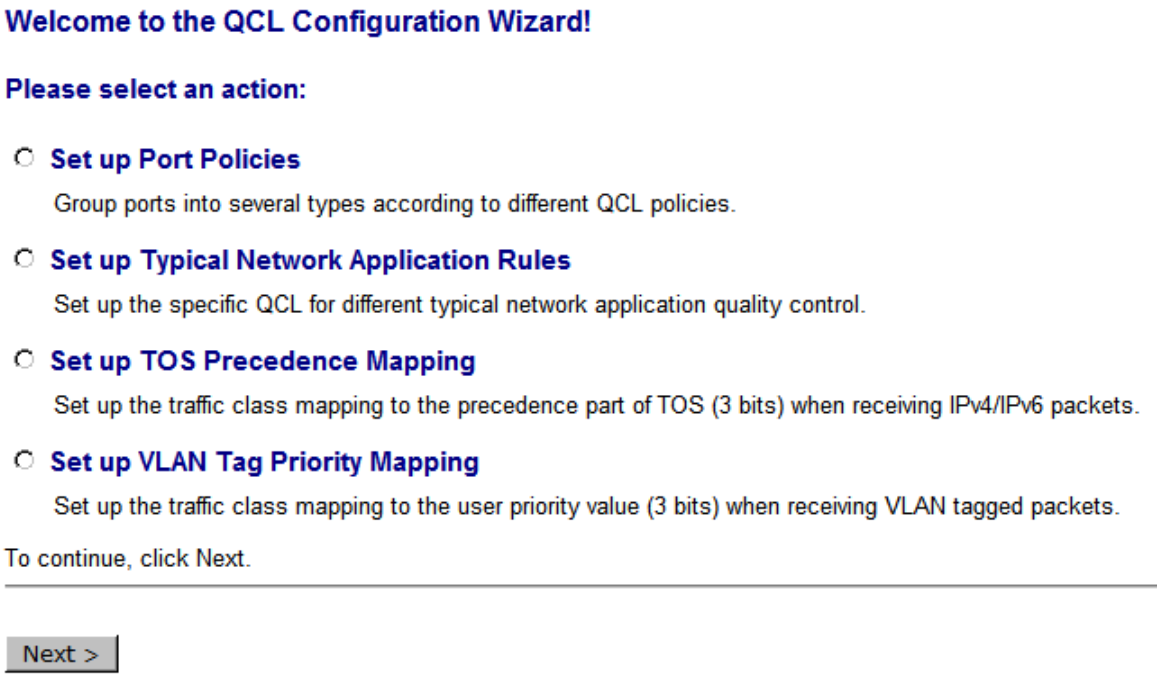
Welcome to the QCL Configuration Wizard!
Please select an action:
Set up Port Policies
Group ports into several types according to different QCL policies.
Set up Typical Network Application Rules
Set up the specific QCL for different typical network application quality control.
Set up TOS Precedence Mapping
Set up the traffic class mapping to the precedence part of TOS (3 bits) when receiving IPv4/IPv6 packets.
Set up VLAN Tag Priority Mapping
Set up the traffic class mapping to the user priority value (3 bits) when receiving VLAN tagged packets.
To continue, click Next.
Next >

Parameter description:

Please select an Action:

User needs to select one of action from following items, then click on **<Next>** to

finish QCL configuration:

- Set up Port Policies
- Set up Typical Network Application Rules
- Set up TOS Precedence Mapping
- Set up VLAN Tag Priority Mapping

Next:

Go to next step.

Cancel:

Abort current configuration back to previous step.

Back:

Back to previous screen.

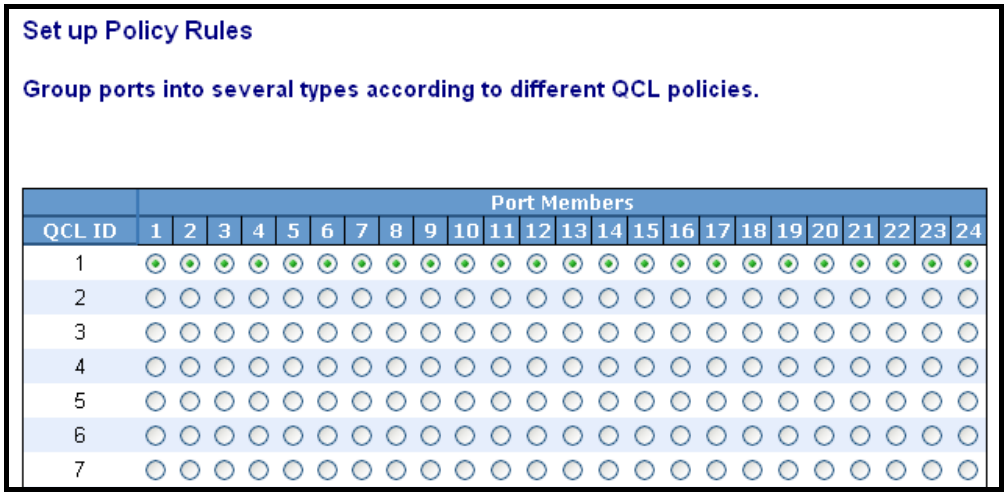
Set up Policy Rules
Group ports into several types according to different QCL policies.
Port Members
QCL ID
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
1
2
3
4
5
6
7

Parameter description:

QCL ID:

QoS Control List (QCL): ***1~24***

Port Member:

Port Member: 1~24

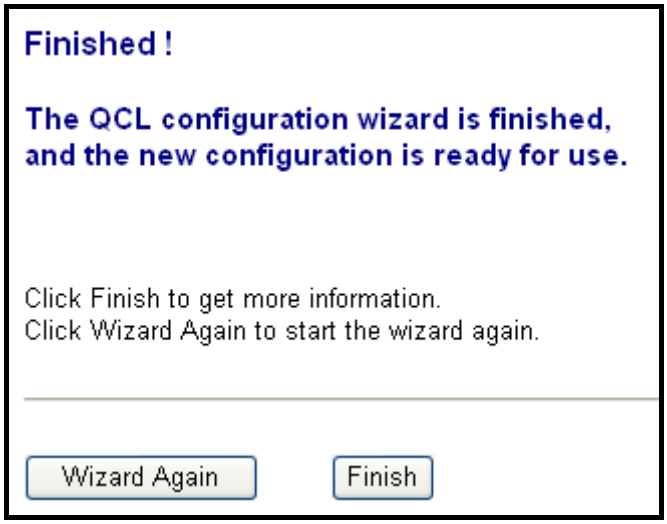
Finished !
The QCL configuration wizard is finished, and the new configuration is ready for use.
Click Finish to get more information.
Click Wizard Again to start the wizard again.
Wizard Again
Finish

Parameter description:

Wizard Again:

Click on the **<Wizard Again>**, back to QCL Configuration Wizard.

Finish:

When you click on <***Finish***>, the parameters will be set according to the wizard configuration and shown on the screen, then ask you to click on <Apply> for changed parameters confirmation.

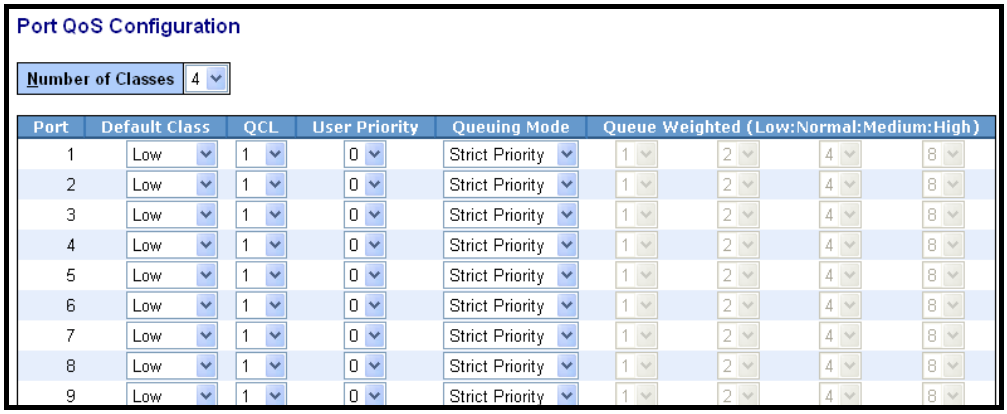
Port QoS Configuration
Number of Classes 4
Port Default Class QCL User Priority Queuing Mode Queue Weighted (Low:Normal:Medium:High)
1 Low 1 0 Strict Priority 1 2 4 8
2 Low 1 0 Strict Priority 1 2 4 8
3 Low 1 0 Strict Priority 1 2 4 8
4 Low 1 0 Strict Priority 1 2 4 8
5 Low 1 0 Strict Priority 1 2 4 8
6 Low 1 0 Strict Priority 1 2 4 8
7 Low 1 0 Strict Priority 1 2 4 8
8 Low 1 0 Strict Priority 1 2 4 8
9 Low 1 0 Strict Priority 1 2 4 8

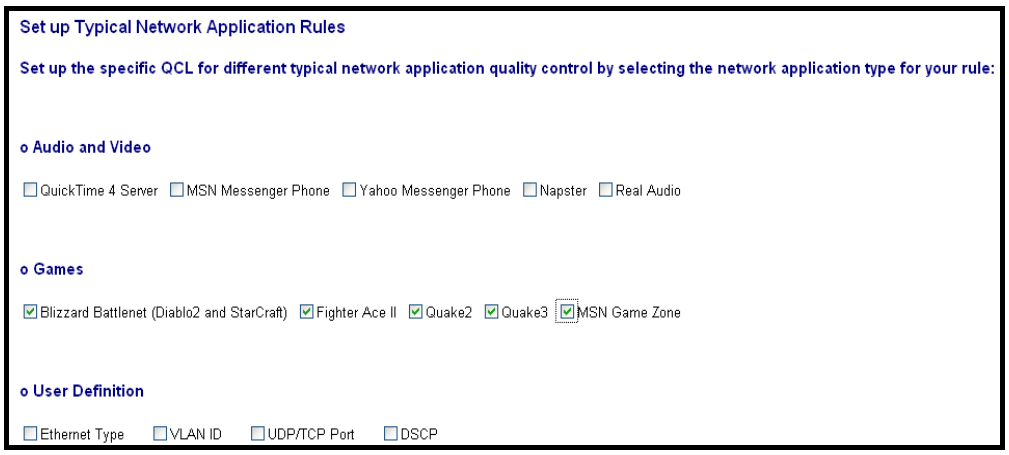

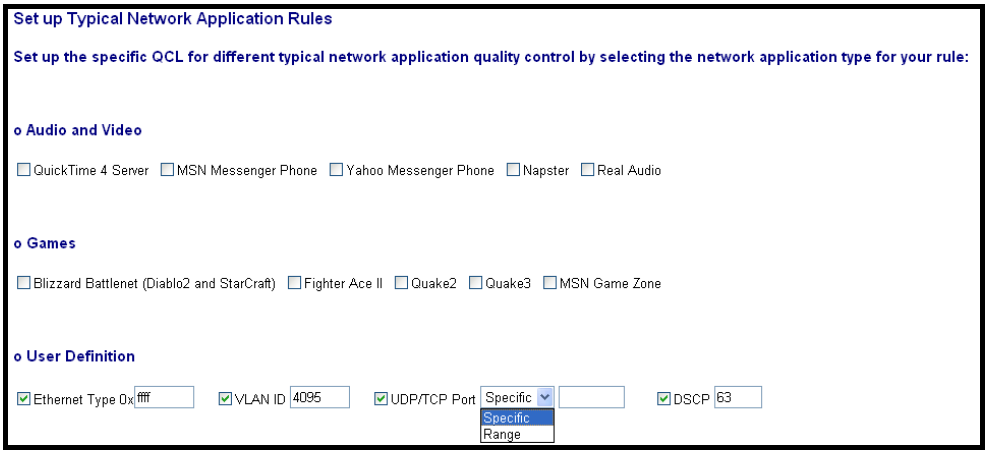

Parameter description:

Audio and Video:

QuickTime 4 Server / MSN Messenger Phone / Yahoo Messenger Phone / Napster / Real Audio

Games:

Blizzard Battlenet (Diablo2 and StarCraft) / Fighter Ace II / Quake2 / Quake3 /

MSN Game Zone

User Definition:

Ethernet Type / VLAN ID / UDP/TCP Port / DSCP

Ethernet Type Value:

Type Range: ***0x600~0xFFFF***

VLAN ID:

VLAN ID Range: ***1~4094***

UDP/TCP Port:

Two Mode: ***Range / Specific***

UDP/TCP Port Range:

Port Range: ***0~65535***

UDP/TCP Port No.:

Port Range: ***0~65535***

DSCP Value:

DSCP Value Range: ***0~63***

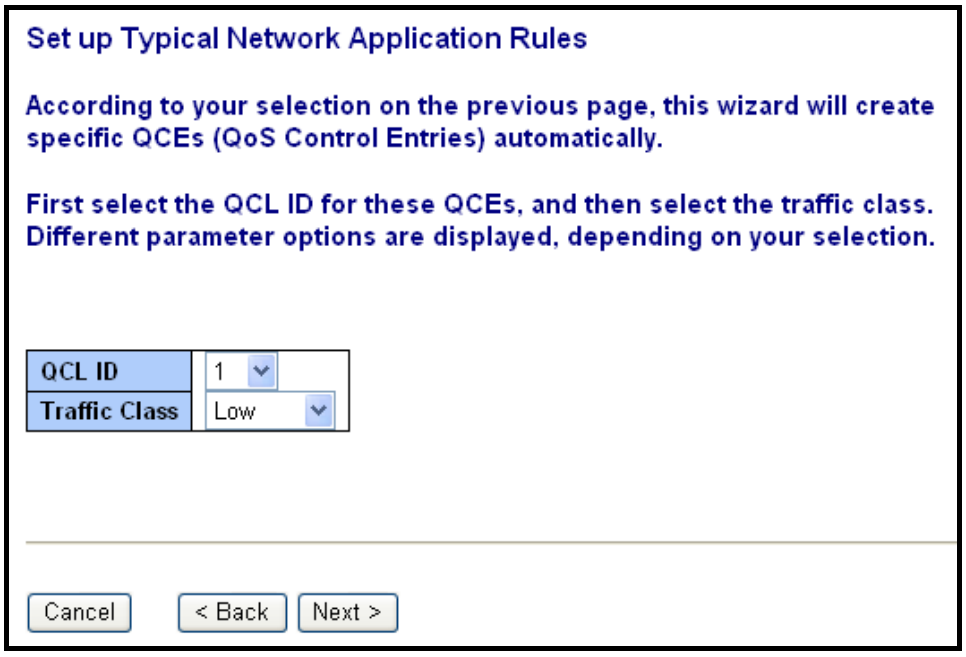
Set up Typical Network Application Rules
According to your selection on the previous page, this wizard will create specific QCEs (QoS Control Entries) automatically.
First select the QCL ID for these QCEs, and then select the traffic class. Different parameter options are displayed, depending on your selection.
QCL ID
1
Traffic Class
Low
Cancel
< Back
Next >

Parameter description:

QCL ID:

QCL ID Range: ***1~24***

Traffic Class:

There are four classes: ***Low / Normal / Medium / High***

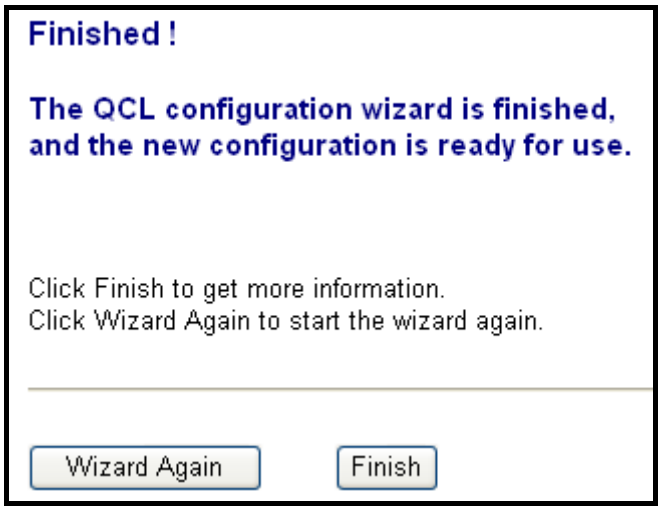
Finished !
The QCL configuration wizard is finished, and the new configuration is ready for use.
Click Finish to get more information.
Click Wizard Again to start the wizard again.
Wizard Again
Finish

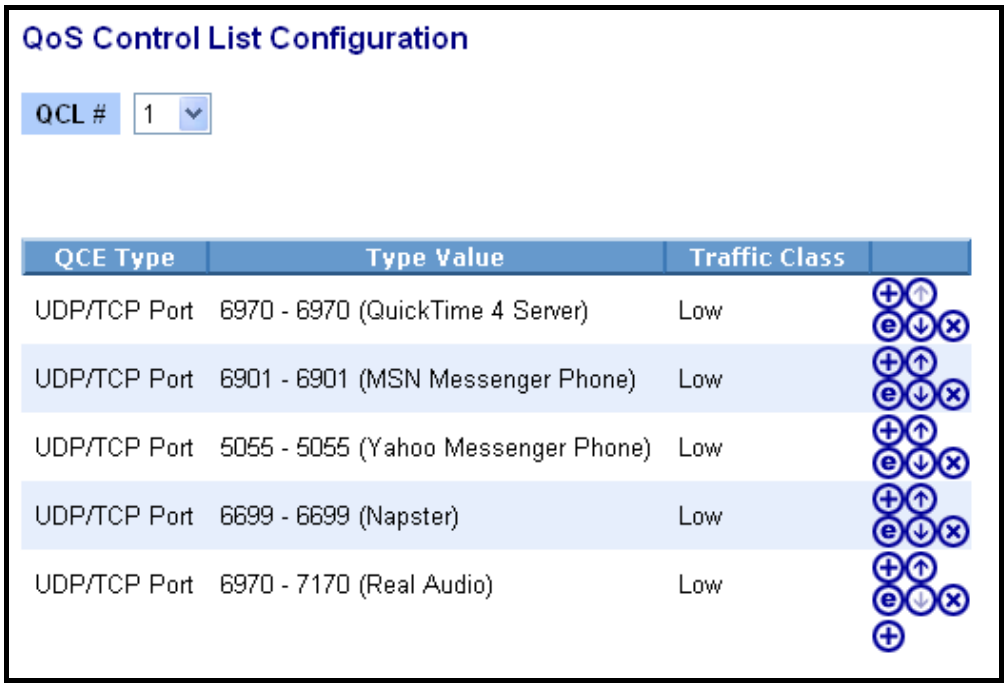
QoS Control List Configuration
QCL #
1
QCE Type
Type Value
Traffic Class
UDP/TCP Port
6970 - 6970 (QuickTime 4 Server)
Low
UDP/TCP Port
6901 - 6901 (MSN Messenger Phone)
Low
UDP/TCP Port
5055 - 5055 (Yahoo Messenger Phone)
Low
UDP/TCP Port
6699 - 6699 (Napster)
Low
UDP/TCP Port
6970 - 7170 (Real Audio)
Low

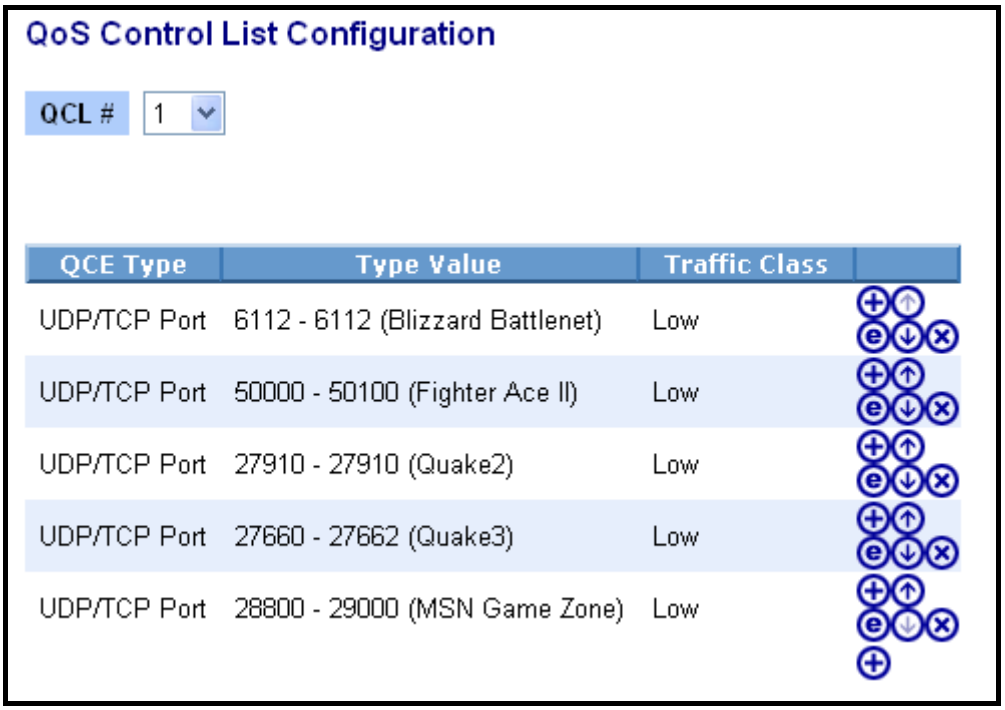
QoS Control List Configuration
QCL # 1
QCE Type Type Value Traffic Class
UDP/TCP Port 6112 - 6112 (Blizzard Battlenet) Low
UDP/TCP Port 50000 - 50100 (Fighter Ace II) Low
UDP/TCP Port 27910 - 27910 (Quake2) Low
UDP/TCP Port 27660 - 27662 (Quake3) Low
UDP/TCP Port 28800 - 29000 (MSN Game Zone) Low

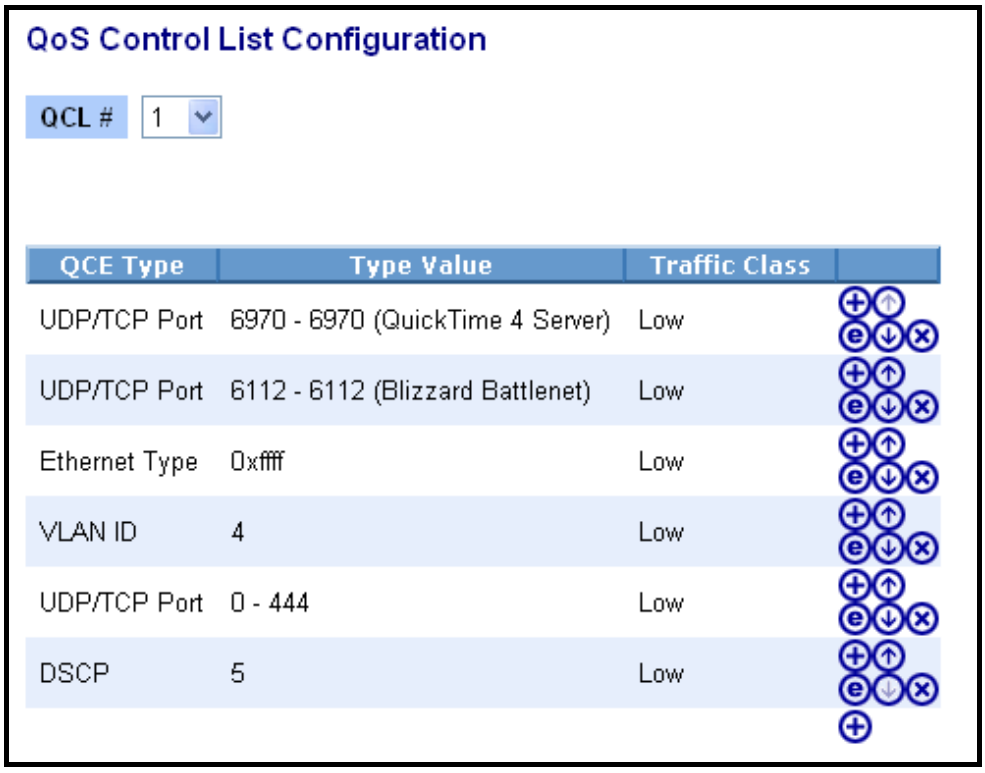
QoS Control List Configuration
QCL # 1
QCE Type Type Value Traffic Class
UDP/TCP Port 6970 - 6970 (QuickTime 4 Server) Low
UDP/TCP Port 6112 - 6112 (Blizzard Battlenet) Low
Ethernet Type 0xffff Low
VLAN ID 4 Low
UDP/TCP Port 0 - 444 Low
DSCP 5 Low

Parameter description:

QCL #:

QoS Control List (QCL): ***1~24***

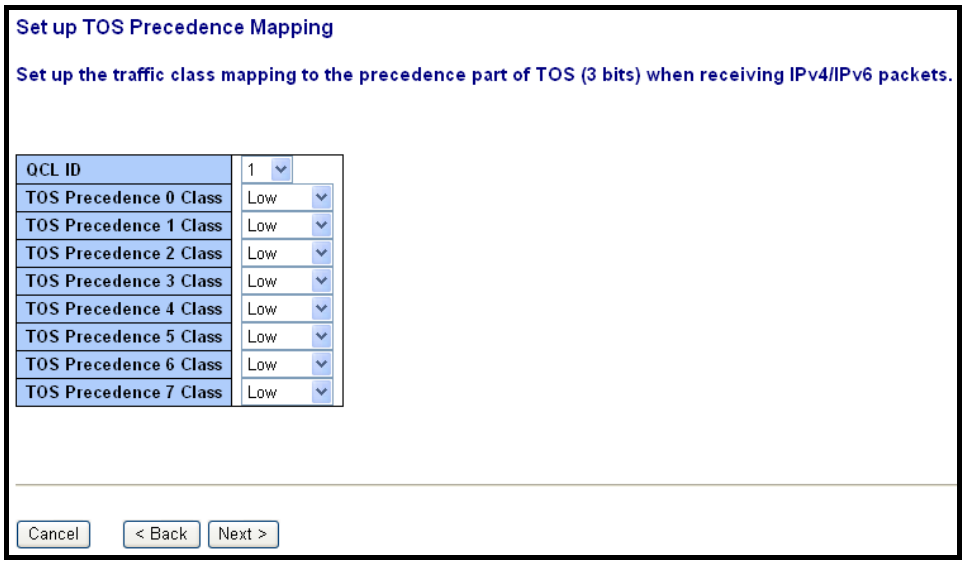

Parameter description:

QCL ID:

QoS Control List (QCL): ***1~24***

TOS Precedence 0~7 Class:

Low / Normal / Medium / High

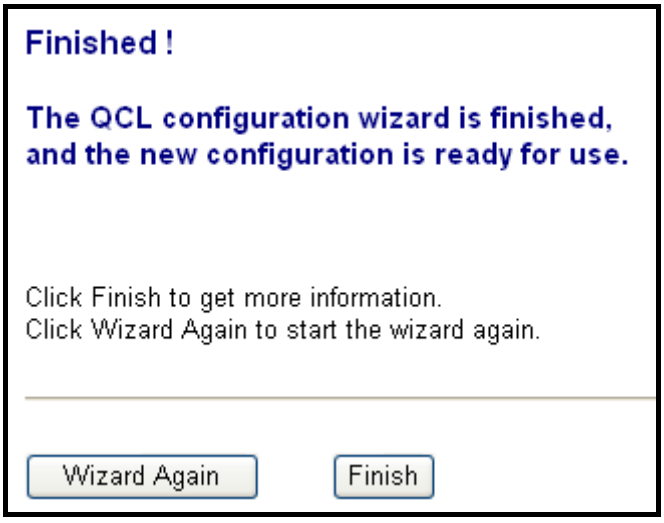
Finished !
The QCL configuration wizard is finished, and the new configuration is ready for use.
Click Finish to get more information.
Click Wizard Again to start the wizard again.
Wizard Again
Finish

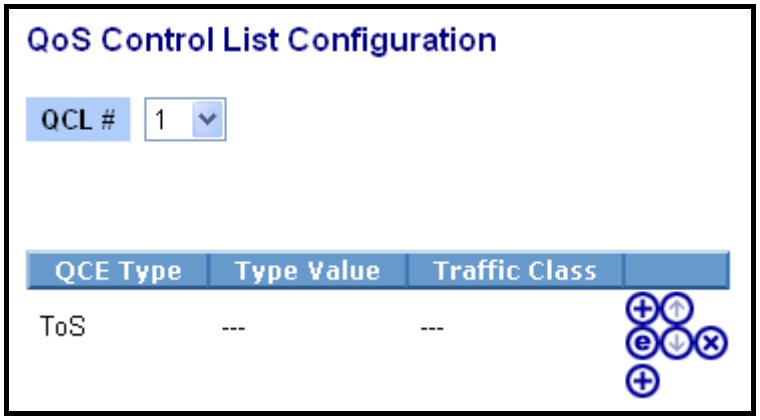

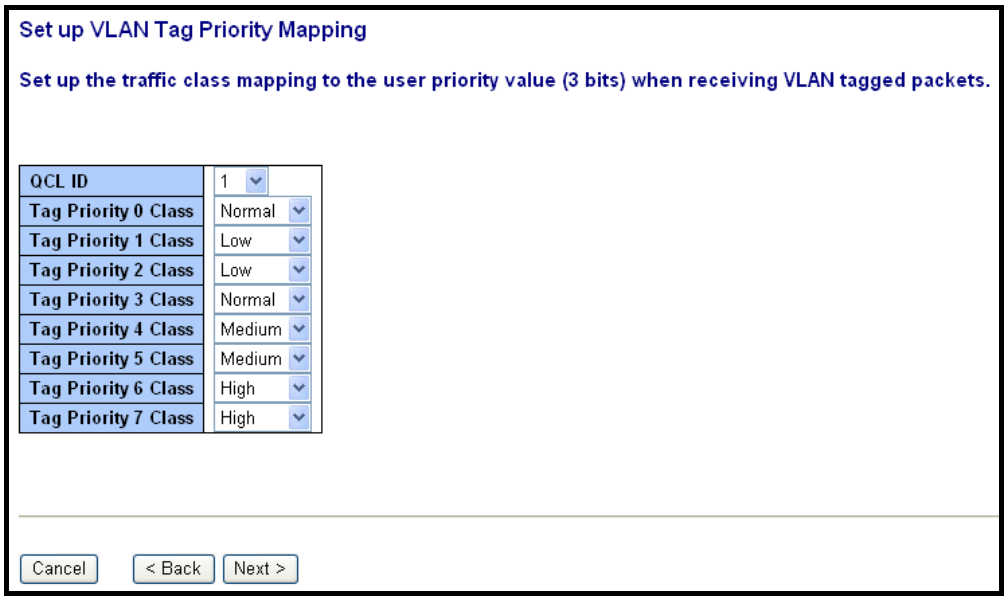

Parameter description:

QCL ID:

QoS Control List (QCL): ***1~24***

Tag Priority 0~7 Class:

Low / Normal / Medium / High

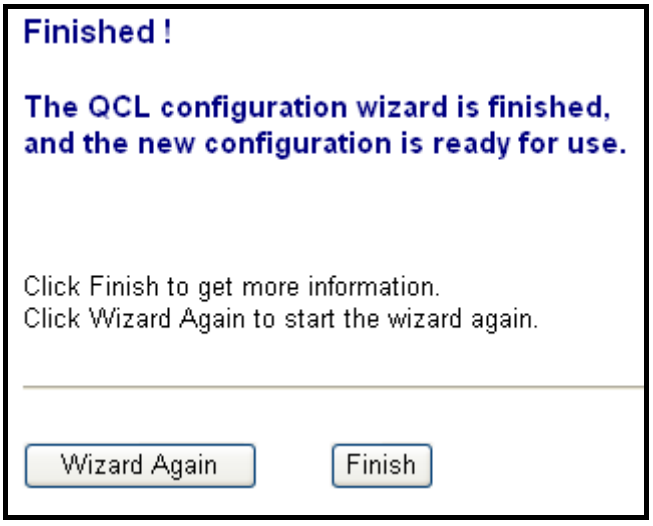
Finished !
The QCL configuration wizard is finished, and the new configuration is ready for use.
Click Finish to get more information.
Click Wizard Again to start the wizard again.
Wizard Again
Finish

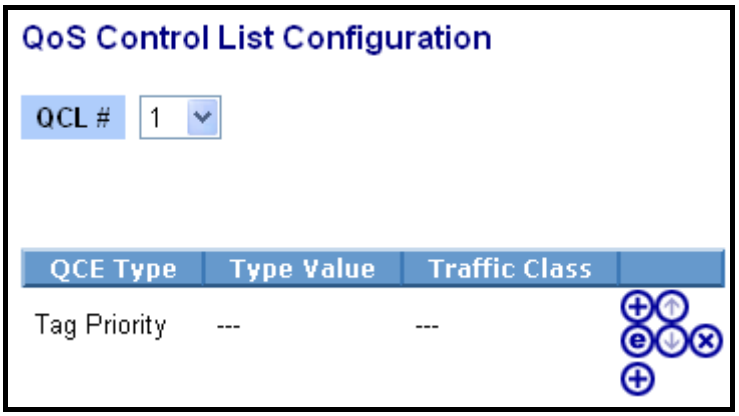

4.8 SNMP

Any Network Management System (NMS) running the Simple Network Management Protocol (SNMP) can manage the Managed devices equipped with SNMP agent, provided that the Management Information Base (MIB) is installed correctly on the managed devices. The SNMP is a protocol that is used to govern the transfer of information between SNMP manager and agent and traverses the Object Identity (OID) of the management Information Base (MIB), described in the form of SMI syntax. SNMP agent is running on the switch to response the request issued by SNMP manager.

Basically, it is passive except issuing the trap information. The switch supports a switch to turn on or off the SNMP agent. If you set the field SNMP “Enable”, SNMP agent will be started up. All supported MIB OIDs, including RMON MIB, can be accessed via SNMP manager. If the field SNMP is set “Disable”, SNMP agent will be de-activated, the related Community Name, Trap Host IP Address, Trap and all MIB counters will be ignored.

Function name:

SNMP Configuration

Function description:

This function is used to configure SNMP settings, community name, trap host and public traps as well as the throttle of SNMP. A SNMP manager must pass the authentication by identifying both community names, then it can access the MIB information of the target device. So, both parties must have the same community name. Once completing the setting, click <**Apply**> button, the setting takes effect.

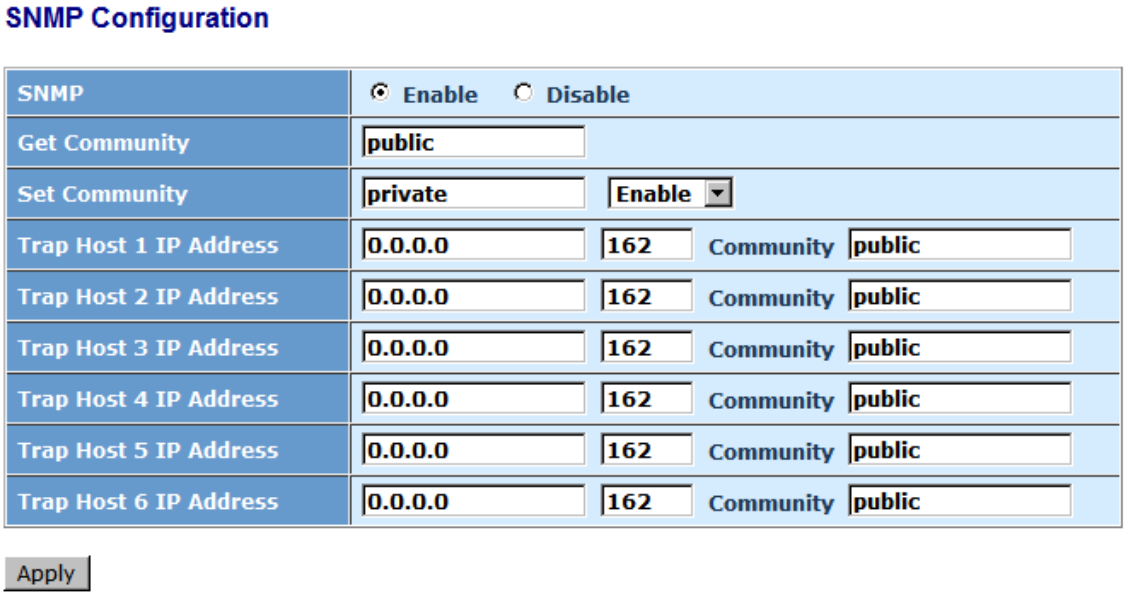

Parameters description:

SNMP:

The term SNMP here is used for the activation or de-activation of SNMP. **Default is Enable**.

Get/Set/Trap Community:

Community name is used as password for authenticating if the requesting network management unit belongs to the same community group. If they both don't have the same community name, they don't belong to the same group. Hence, the requesting network management unit can not access the device with different community name via SNMP protocol; If they both have the same community name, they can talk each other.

Community name is user-definable with a maximum length of 15 characters and is case sensitive. There is not allowed to put any blank in the community name string. Any printable character is allowable.

The community name for each function works independently. Each function has its

own community name. Say, the community name for GET only works for GET function and can't be applied to other function such as SET and Trap.

Default SNMP function: **Enable**

Default community name for GET: **public**

Default community name for SET: **private**

Default community name for Trap: **public**

Default Set function: **Enable**

Default trap host IP address: **0.0.0.0**

Default port number: **162**

Trap:

In the switch, there are 6 trap hosts supported. Each of them has its own community name and IP address; is user-definable. To set up a trap host means to create a trap manager by assigning an IP address to host the trap message. In other words, the trap host is a network management unit with SNMP manager receiving the trap message from the managed switch with SNMP agent issuing the trap message. 6 trap hosts can prevent the important trap message from losing.

For each public trap, the switch supports the trap event Cold Start, Warm Start, Link Down, Link Up and Authentication Failure Trap. They can be enabled or disabled individually. When enabled, the corresponded trap will actively send a trap message to the trap host when a trap happens. If all public traps are disabled, no public trap message will be sent. As to the Enterprise (no. 6) trap is classified as private trap, which are listed in the Trap Alarm Configuration function folder. Default for all public traps: **Enable.**

4.9 ACL

The SNMP-24MGB switch access control list (ACL) is probably the most commonly used object in the IOS. It is used for packet filtering but also for selecting types of traffic to be analyzed, forwarded, or influenced in some way.

The ACLs are divided into EtherTypes. IPv4, ARP protocol, MAC and VLAN parameters etc. Here we will just go over the standard and extended access lists for TCP/IP. As you create ACEs for ingress classification, you can assign a policy for each port, the policy number is 1-8, however, each policy can be applied to any port. This makes it very easy to determine what type of ACL policy you will be working with.

4.9.1 ACL Ports Configuration

Function name:

ACL Port Configuration

Function description:

The switch ACL function support ***up to 128 Access Control Entries (ACEs)***, using the shared 128 ACEs for ingress classification. You can create an ACE and assign this ACE for each port with <Any> or assign this ACE for a policy or assign this ACE for a port. There are 8 policies, each port can select one of policy, then decides which of the following actions would take according to the packet's IPv4, EtherType, ARP Protocol, MAC Parameters and VLAN parameters:

- **Packet Deny or Permit**
- **Rate Limiter (Unit: pps)**
- **Port Copy (1 – 24)**

ACL Ports Configuration

Port #	Policy ID	Action	Rate Limiter ID	Port Copy	Counter
1	1	Permit	Disabled	Disabled	92459
2	1	Permit	Disabled	Disabled	0
3	1	Permit	Disabled	Disabled	0
4	1	Permit	Disabled	Disabled	0
5	1	Permit	Disabled	Disabled	0
6	1	Permit	Disabled	Disabled	0
7	1	Permit	Disabled	Disabled	0
8	1	Permit	Disabled	Disabled	0
9	1	Permit	Disabled	Disabled	0
10	1	Permit	Disabled	Disabled	0
11	1	Permit	Disabled	Disabled	0
12	1	Permit	Disabled	Disabled	0

Parameter description:

Port #:

Port number: **1~24**

Policy ID:

Policy ID range: **1~8**

Action:

Permit or Deny forwarding the met ACL packets

Rate Limiter ID:

Disabled: Disable Rate Limitation

Rate Limiter ID Range: 1~16. To select one of rate limiter ID for this port, it will limit met ACL packets by rate limiter ID configuration.

Port Copy:

Disabled: Disable to copy the met ACL packets to specific port

Port number: 1~24. Copy the met ACL packets to the selected port

Counter:

The counter will increase from initial value 0, when this port received one of the met ACL packet the counter value will increase +1.

4.9.2 ACL Rate Limiter Configuration

Function name:

ACL Rate Limiter Configuration

Function description:

There are 16 rate limiter ID. You can assign one of the limiter ID for each port. The rate limit configuration unit is Packet Per Second (pps).

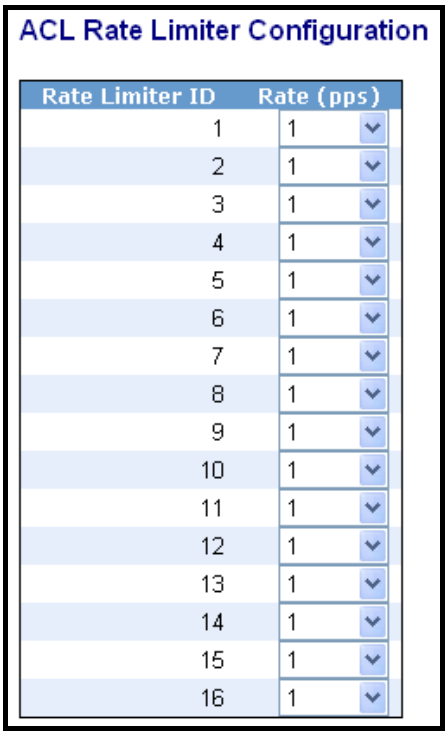

Parameter description:

Rate Limiter ID:

ID Range: **1~16**

Rate(pps):

1 / 2 / 4 / 8 / 16 / 32 / 64 / 128 / 256 / 512 / 1K / 2K / 4K / 8K / 16K / 32K / 64K / 128K / 256K / 512K / 1024K

4.9.3 Access Control List

Function name:

Access Control List

Function description:

The switch ACL function support ***up to 128 Access Control Entries (ACEs)***, using the shared 128 ACEs for ingress classification. You can create an ACE and assign this ACE for each port with <Any> or assign this ACE for a policy or assign this ACE for a port. There are 8 policies, each port can select one of policy, then decides which of the Permit/Deny, Rate Limitation and Port Copy actions would take according to the ACL configuration packet's IPv4, EtherType, ARP Protocol, MAC Parameters and VLAN parameters.

Parameter description:

Ingress Port:

Configurable Range: Any / Policy 1-8 / Port 1-24

Any: Apply this ACE rule for each port ingress classification

Policy 1-8: Apply this ACE rule for specific policy

Port 1-24: Apply this ACE rule for specific port ingress classification

Access Control List Configuration

Auto-refresh ☐ Refresh Clear

Ingress Port	Frame Type	Action	Rate Limiter	Port Copy	Counters	
Any	ARP	Deny	Any	Disabled	79	
Any	ARP	Permit	Any	Disabled	38760	
Any	ARP	Permit	3	Disabled	0	
Any	ARP	Permit	Any	Disabled	0	
Any	ARP	Permit	Any	Disabled	34	
Any	LLC	Deny	Any	Disabled	0	
Any	EType	Deny	Any	Disabled	0	
Any	IPv4 DIP:192.168.0.222	Permit	Any	Disabled	4689	
Any	IPv4/DHCP Client (Out)	Permit	Any	Disabled	261	
Any	IPv4/DHCP Server (Out)	Permit	Any	Disabled	360	
Any	IPv4/Other	Permit	Any	Disabled	601	
Any	LLC	Deny	Any	Disabled	46431	
Any	EType	Deny	Any	Disabled	0	
Any	EType	Deny	Any	Disabled	0	
Any	EType	Deny	Any	Disabled	0	
						⊕

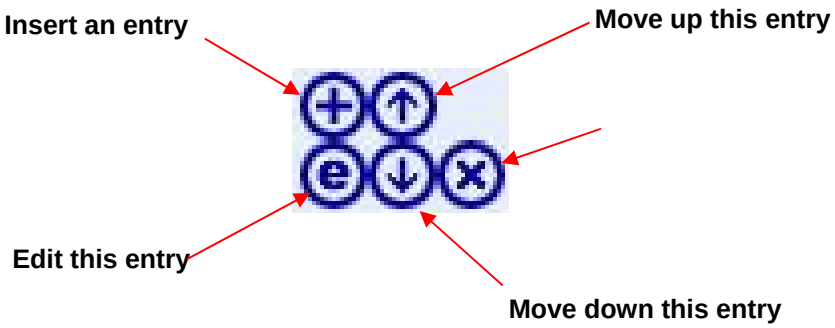

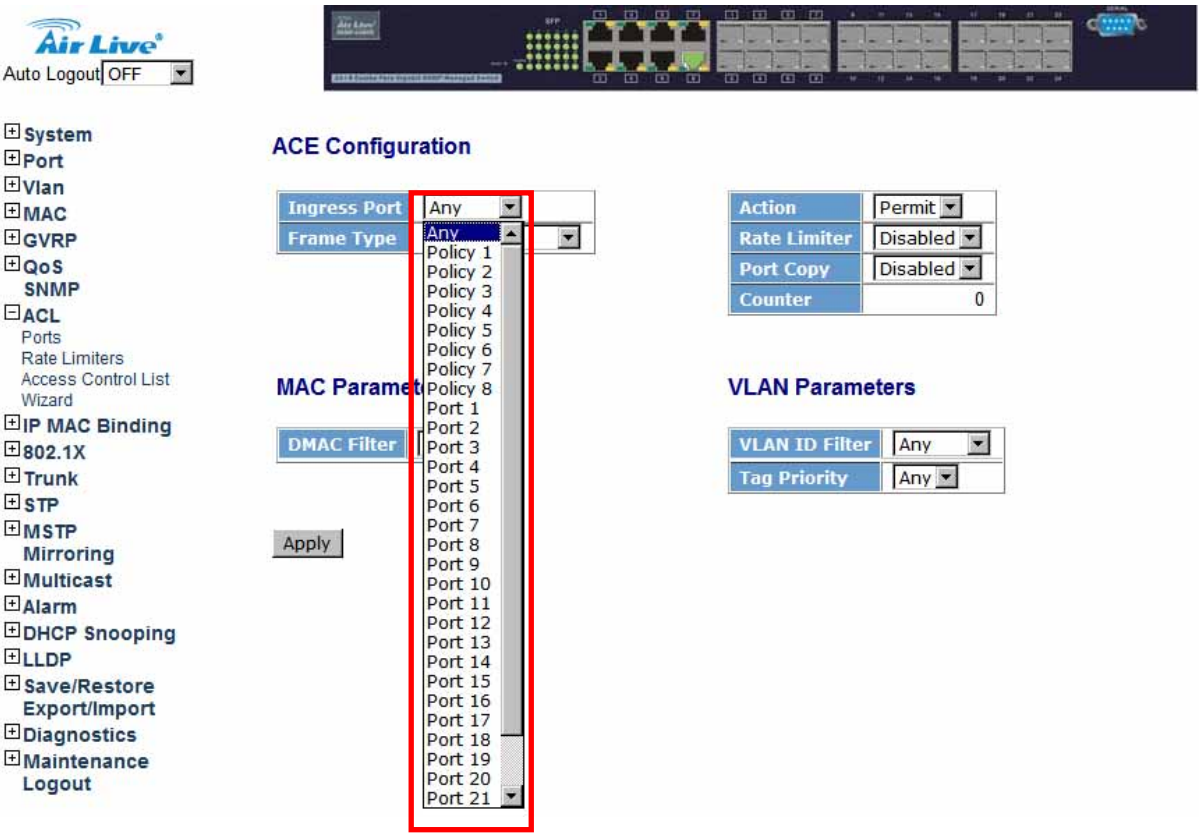

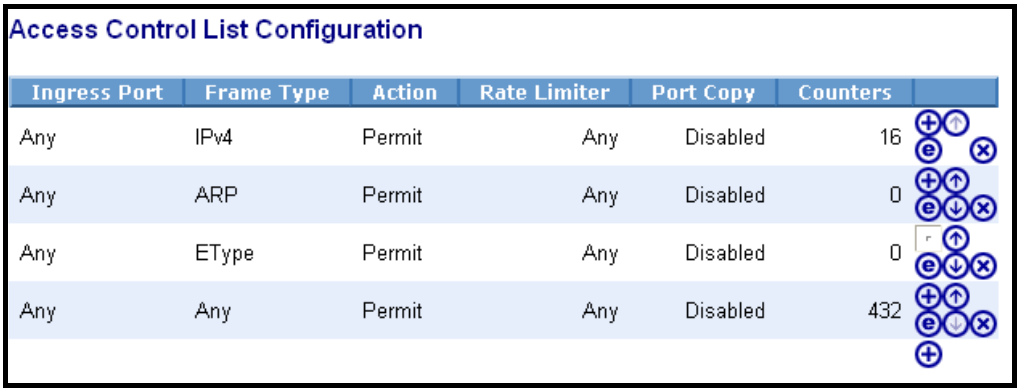

Parameter description:

Frame Type:

Range: ***Any / Ethernet Type / ARP / IPv4***

Any: It is including all frame type

Ethernet Type: It is including all Ethernet frame type

ARP: It is including all ARP protocol frame type

IPv4: It is including all IPv4 protocol frame type

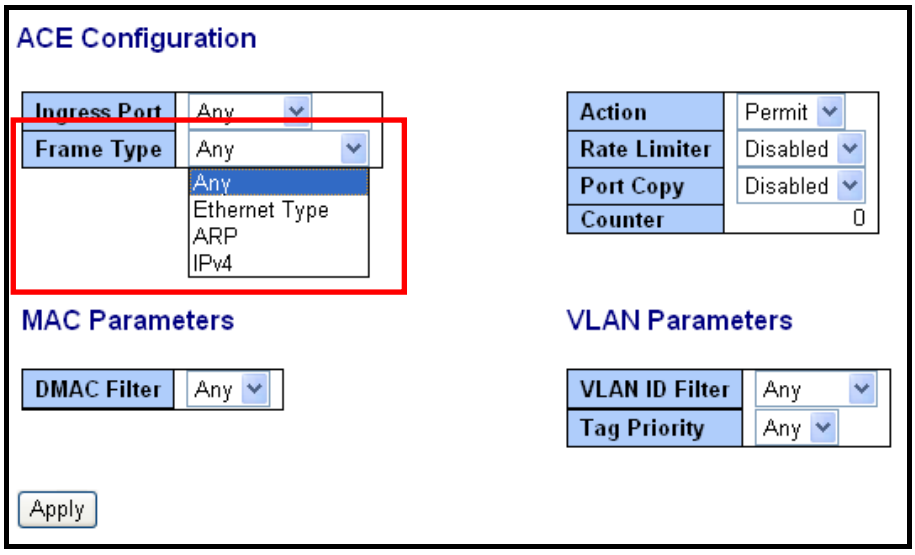
ACE Configuration
Ingress Port
Any
Frame Type
Any
Any
Ethernet Type
ARP
IPv4
Action
Permit
Rate Limiter
Disabled
Port Copy
Disabled
Counter
0
MAC Parameters
DMAC Filter
Any
VLAN Parameters
VLAN ID Filter
Any
Tag Priority
Any
Apply

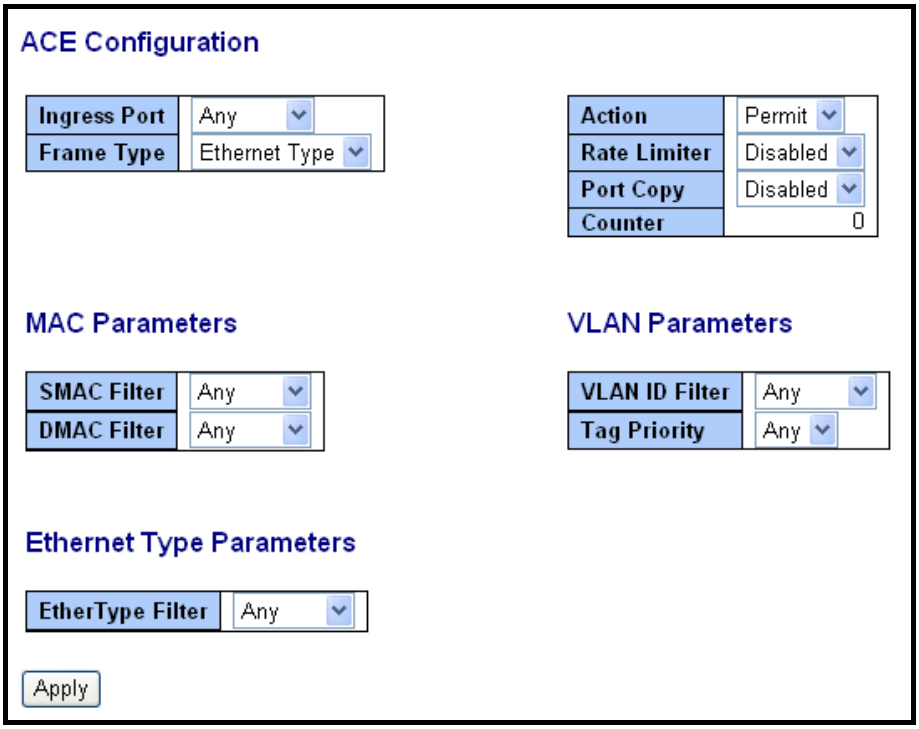
ACE Configuration
Ingress Port
Any
Frame Type
Ethernet Type
Action
Permit
Rate Limiter
Disabled
Port Copy
Disabled
Counter
0
MAC Parameters
SMAC Filter
Any
DMAC Filter
Any
VLAN Parameters
VLAN ID Filter
Any
Tag Priority
Any
Ethernet Type Parameters
EtherType Filter
Any
Apply

MAC Parameters

SMAC Filter	Specific
SMAC Value	00-00-00-00-00-01
DMAC Filter	Any

Ethernet Type Parameters

EtherType Filter	Specific
Ethernet Type Value	0x FFFF

ACE Configuration

Ingress Port	Any
Frame Type	ARP

Action	Permit
Rate Limiter	Disabled
Port Copy	Disabled
Counter	0

MAC Parameters

SMAC Filter	Any
DMAC Filter	Any

VLAN Parameters

VLAN ID Filter	Any
Tag Priority	Any

ARP Parameters

ARP/RARP	Any
Request/Reply	Any
Sender IP Filter	Any
Target IP Filter	Any

ARP SMAC Match	Any
RARP DMAC Match	Any
IP/Ethernet Length	Any
IP	Any
Ethernet	Any

ARP Parameters

ARP/RARP	Other
Request/Reply	Any / ARP / RARP / Other
Sender IP Filter	
Target IP Filter	

ARP Parameters

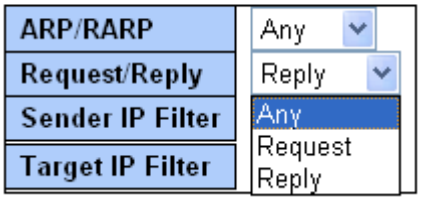

ARP Parameters

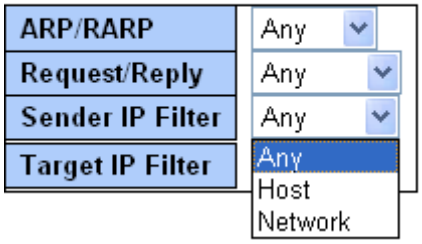

ARP Parameters

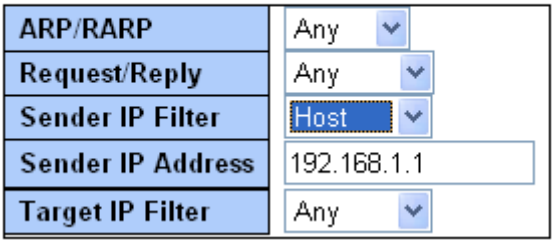

ARP Parameters

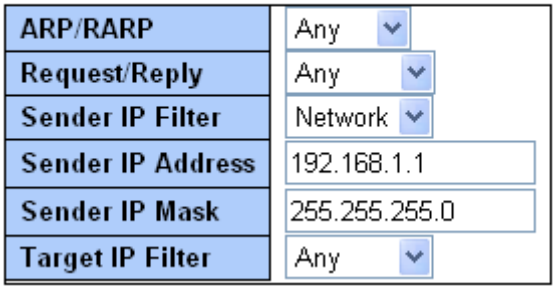

ARP Parameters

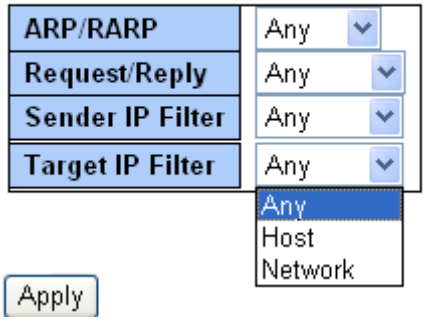

ARP Parameters

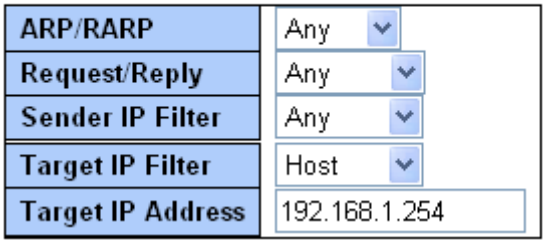

ARP Parameters

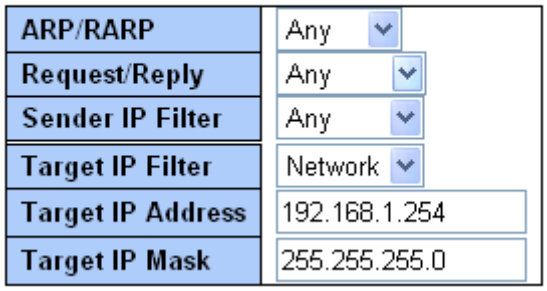

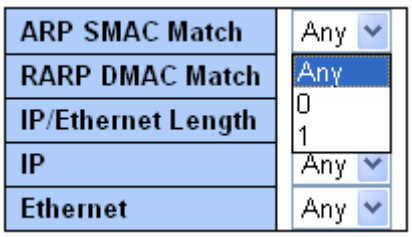

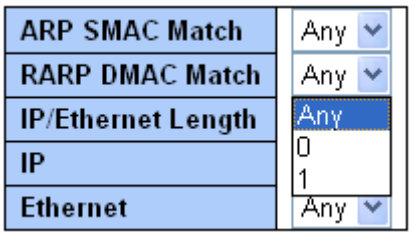
ARP SMAC Match
RARP DMAC Match
IP/Ethernet Length
IP
Ethernet
Any
Any
Any
0
1
Any

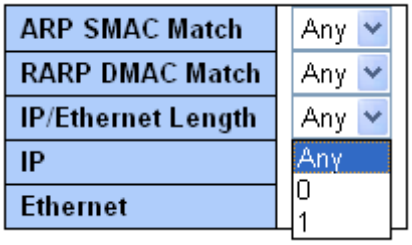
ARP SMAC Match
RARP DMAC Match
IP/Ethernet Length
IP
Ethernet
Any
Any
Any
Any
0
1

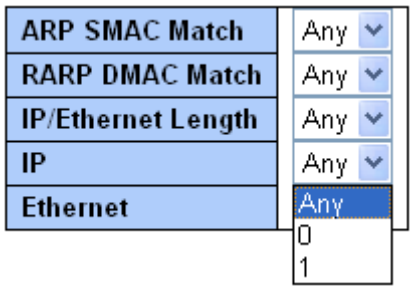
ARP SMAC Match
RARP DMAC Match
IP/Ethernet Length
IP
Ethernet
Any
Any
Any
Any
Any
0
1

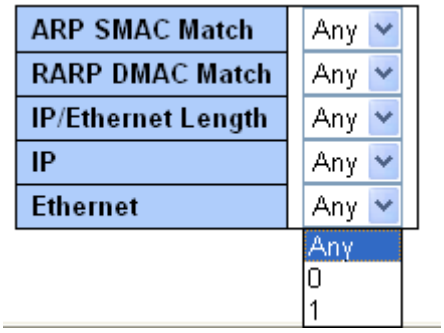
ARP SMAC Match
RARP DMAC Match
IP/Ethernet Length
IP
Ethernet
Any
Any
Any
Any
Any
Any
0
1

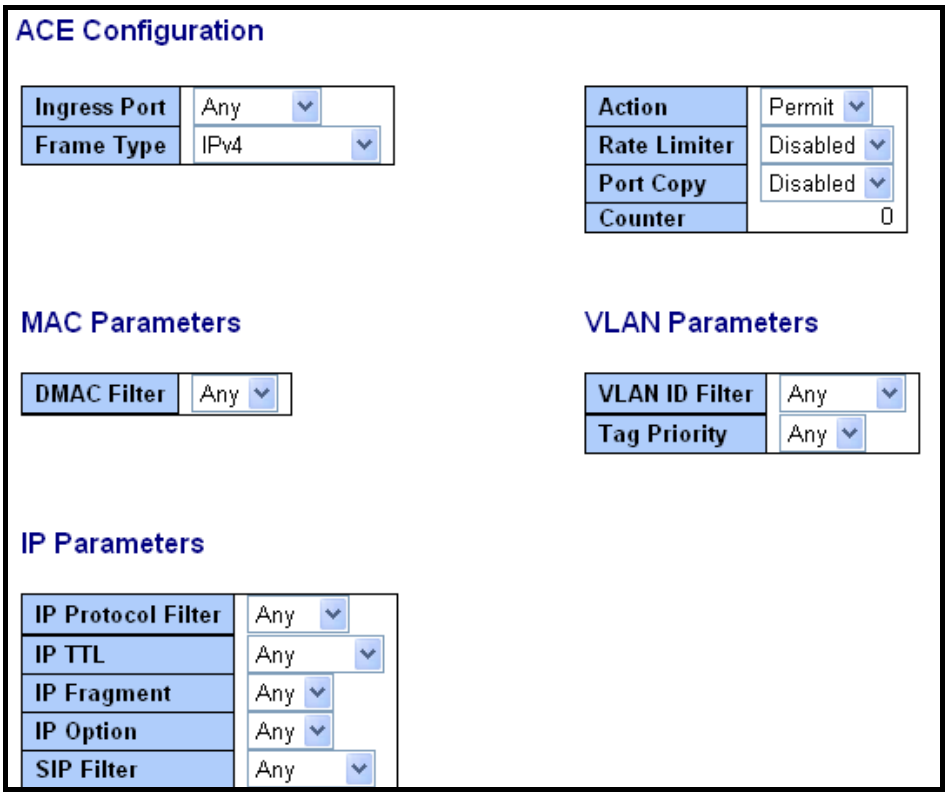
ACE Configuration
Ingress Port
Any
Frame Type
IPv4
Action
Permit
Rate Limiter
Disabled
Port Copy
Disabled
Counter
0
MAC Parameters
DMAC Filter
Any
VLAN Parameters
VLAN ID Filter
Any
Tag Priority
Any
IP Parameters
IP Protocol Filter
Any
IP TTL
Any
IP Fragment
Any
IP Option
Any
SIP Filter
Any

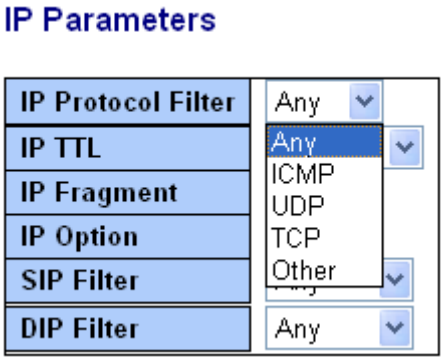
IP Parameters
IP Protocol Filter
Any
IP TTL
Any
ICMP
UDP
TCP
Other
IP Fragment
IP Option
SIP Filter
DIP Filter
Any

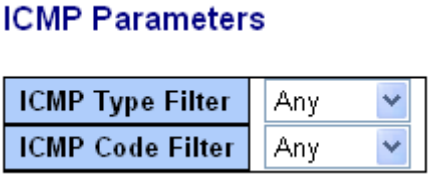
ICMP Parameters
ICMP Type Filter
Any
ICMP Code Filter
Any

ICMP Parameters

ICMP Parameters

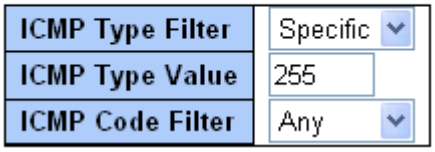

ICMP Parameters

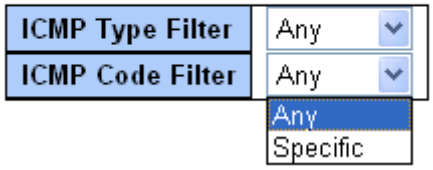

ICMP Parameters

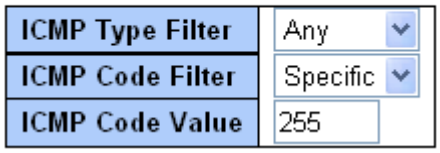

UDP Parameters



UDP Parameters

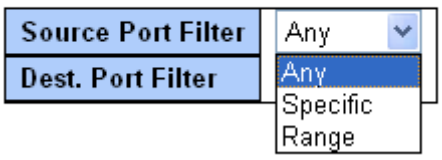

UDP Parameters

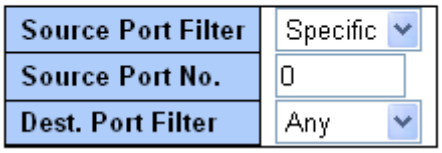

UDP Parameters

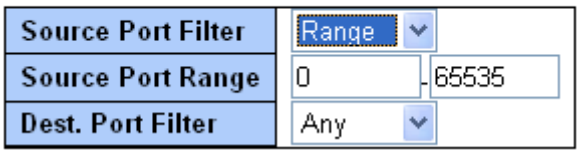

UDP Parameters

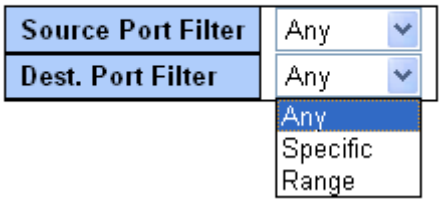

UDP Parameters

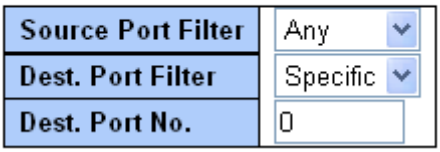

UDP Parameters

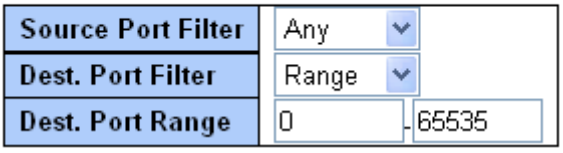

TCP Parameters

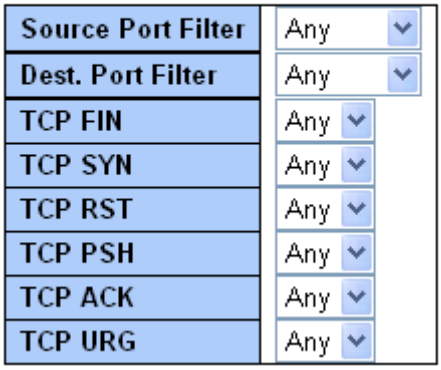

TCP Parameters

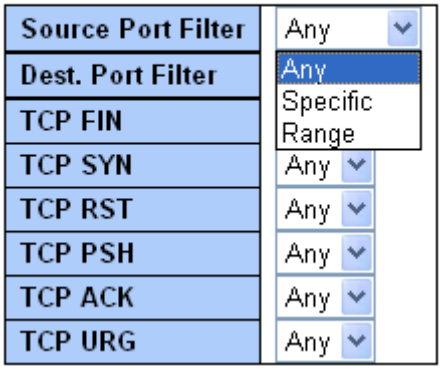

TCP Parameters

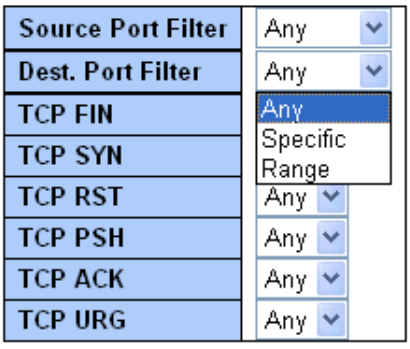

TCP Parameters

Source Port Filter	Specific
Source Port No.	0
Dest. Port Filter	Specific
Dest. Port No.	0
TCP FIN	Any
TCP SYN	Any
TCP RST	Any
TCP PSH	Any
TCP ACK	Any
TCP URG	Any

TCP Parameters

Source Port Filter	Range
Source Port Range	0 - 65535
Dest. Port Filter	Range
Dest. Port Range	0 - 65535
TCP FIN	Any
TCP SYN	Any
TCP RST	Any
TCP PSH	Any
TCP ACK	Any
TCP URG	Any

TCP Parameters

Source Port Filter	Any
Dest. Port Filter	Any
TCP FIN	Any
TCP SYN	Any (0, 1)
TCP RST	
TCP PSH	Any
TCP ACK	Any
TCP URG	Any

IP Parameters

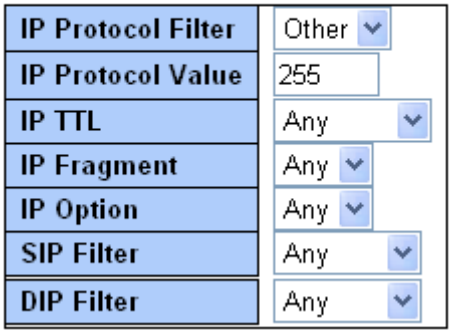

IP Parameters

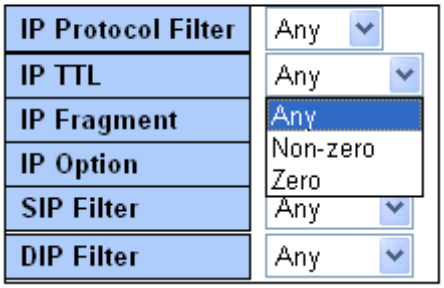

IP Parameters

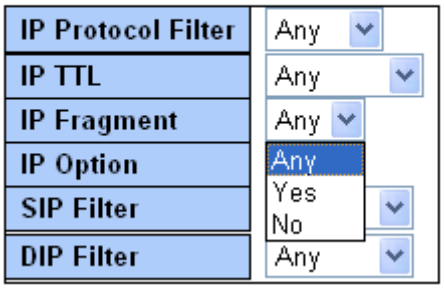

IP Parameters

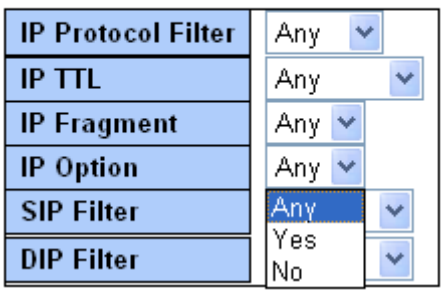

IP Parameters

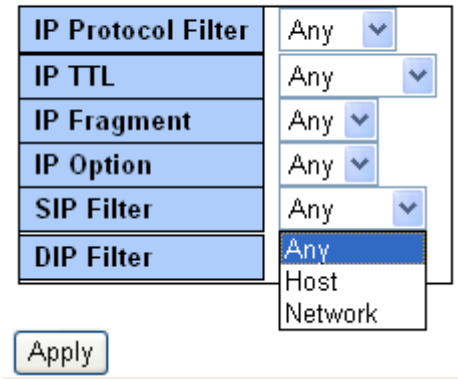

IP Parameters

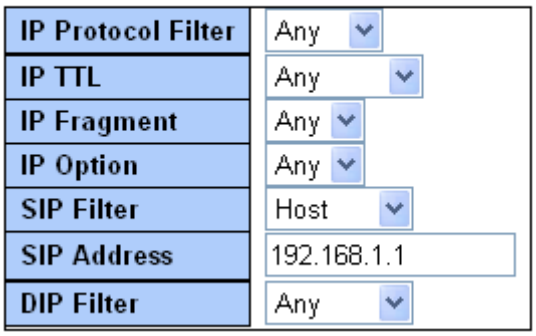

IP Parameters

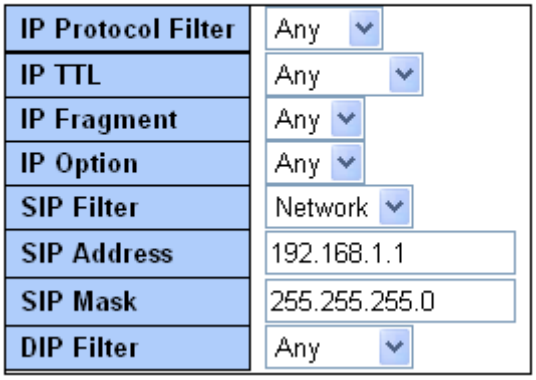

IP Parameters

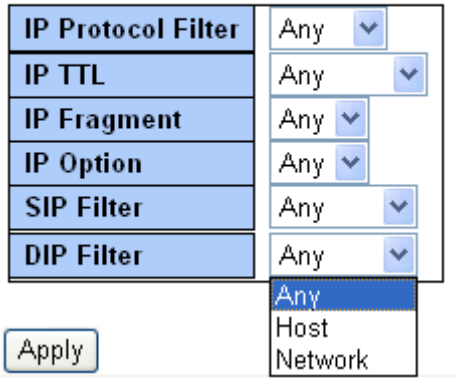

IP Parameters

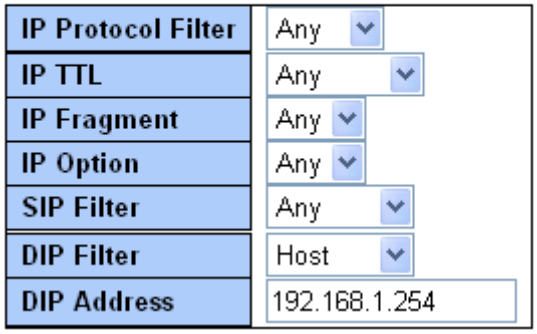

IP Parameters

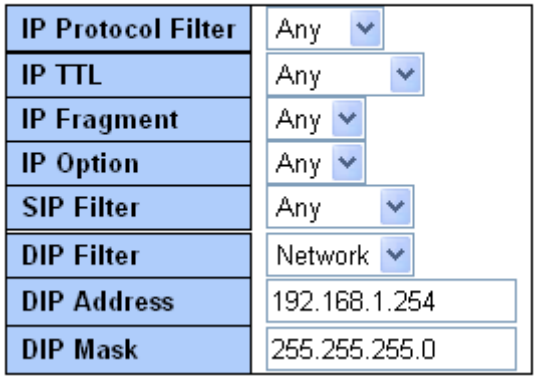

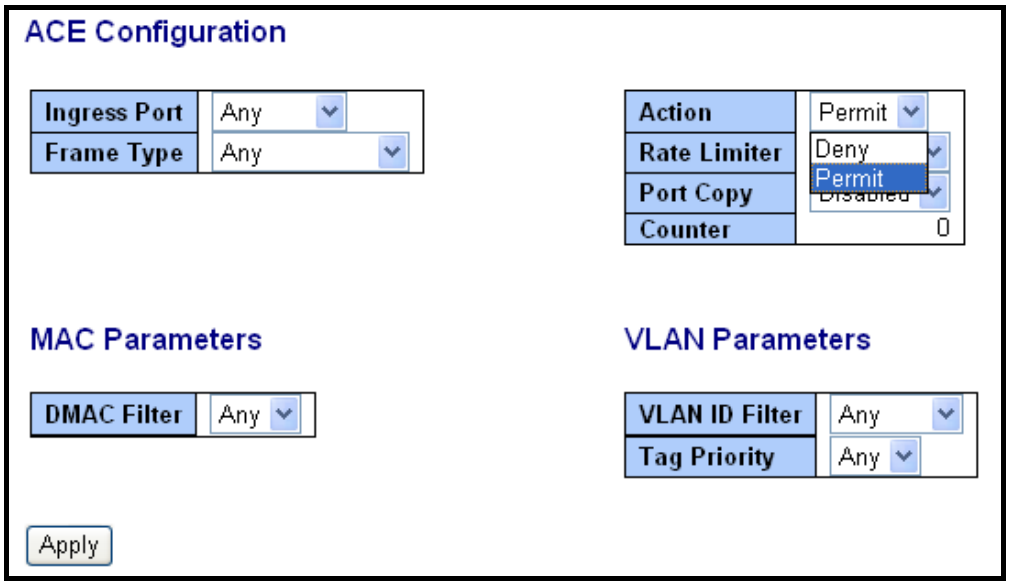
ACE Configuration
Ingress Port
Any
Frame Type
Any
Action
Permit
Rate Limiter
Deny
Permit
Port Copy
Counter
0
MAC Parameters
DMAC Filter
Any
VLAN Parameters
VLAN ID Filter
Any
Tag Priority
Any
Apply

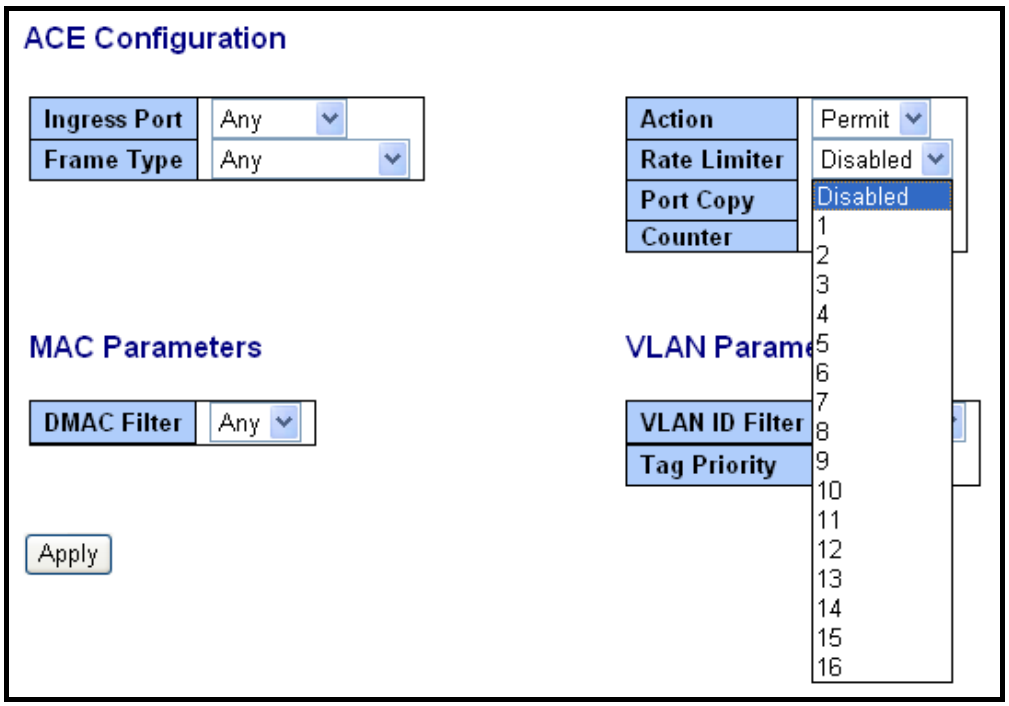
ACE Configuration
Ingress Port
Any
Frame Type
Any
Action
Permit
Rate Limiter
Disabled
Port Copy
Counter
Disabled
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
MAC Parameters
DMAC Filter
Any
VLAN Parame
VLAN ID Filter
Tag Priority
Apply

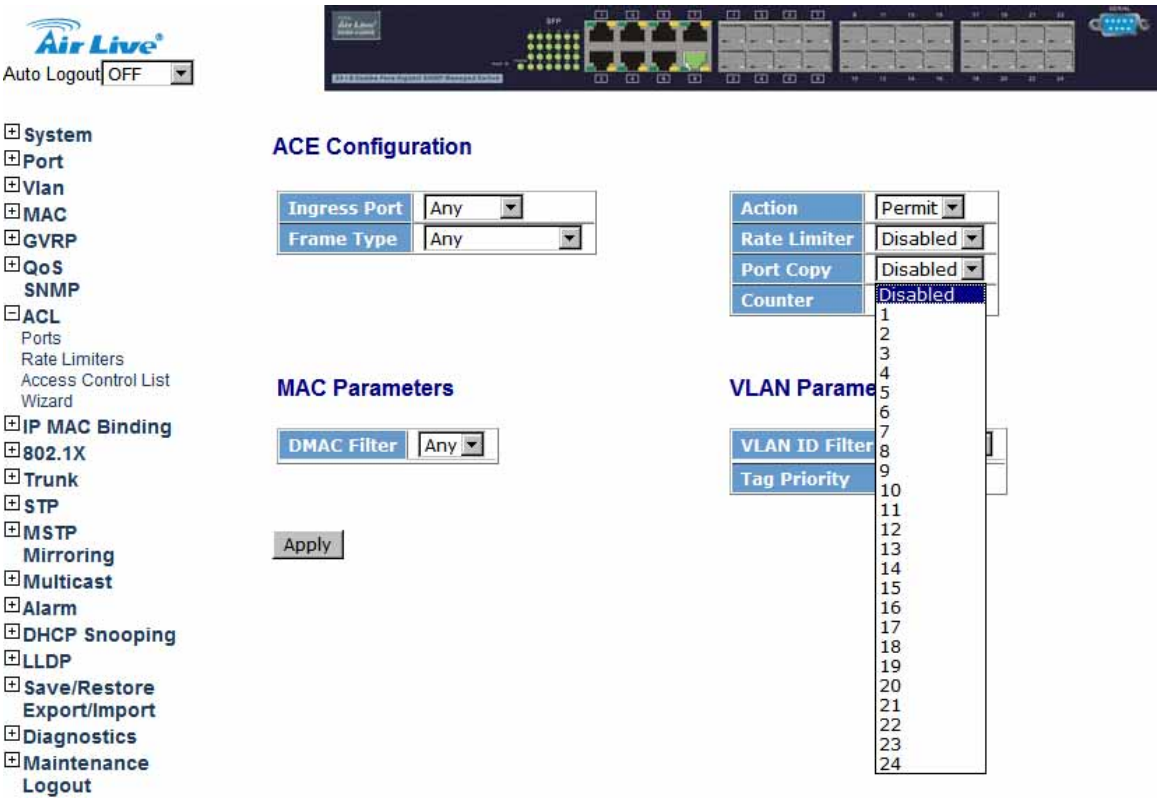
Auto Logout OFF
System
Port
Vlan
MAC
GVRP
QoS
SNMP
ACL
Ports
Rate Limiters
Access Control List
Wizard
IP MAC Binding
802.1X
Trunk
STP
MSTP
Mirroring
Multicast
Alarm
DHCP Snooping
LLDP
Save/Restore
Export/Import
Diagnostics
Maintenance
Logout
ACE Configuration
Ingress Port
Any
Frame Type
Any
Action
Permit
Rate Limiter
Disabled
Port Copy
Disabled
Counter
Disabled
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
MAC Parameters
DMAC Filter
Any
VLAN Parame
VLAN ID Filter
Tag Priority
Apply

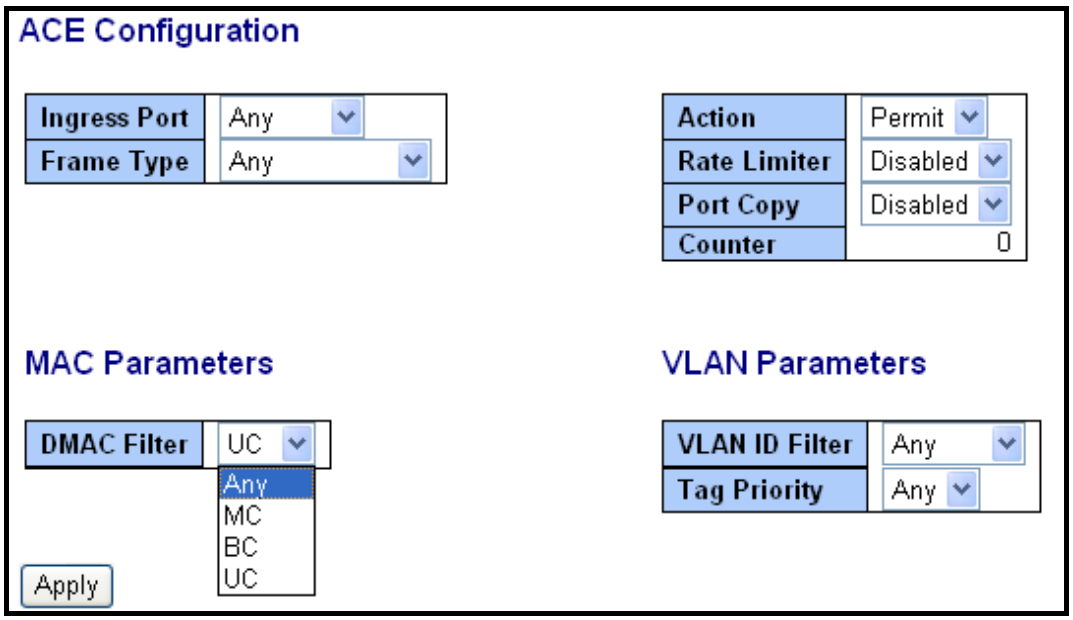
ACE Configuration
Ingress Port
Any
Frame Type
Any
Action
Permit
Rate Limiter
Disabled
Port Copy
Disabled
Counter
0
MAC Parameters
DMAC Filter
UC
Any
MC
BC
UC
VLAN Parameters
VLAN ID Filter
Any
Tag Priority
Any
Apply

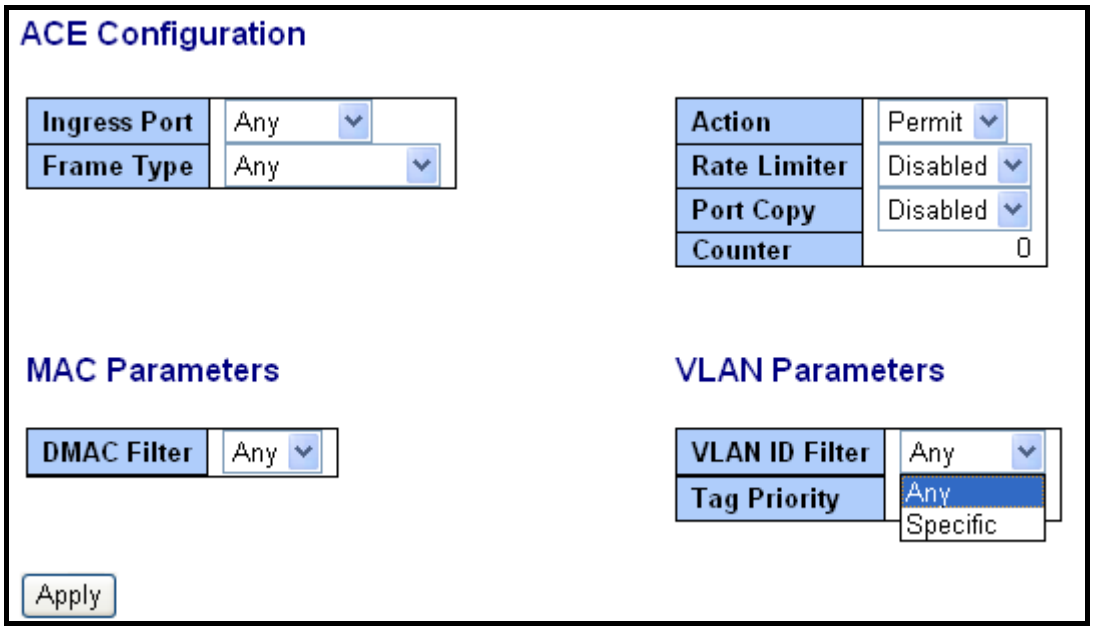
ACE Configuration
Ingress Port
Any
Frame Type
Any
Action
Permit
Rate Limiter
Disabled
Port Copy
Disabled
Counter
0
MAC Parameters
DMAC Filter
Any
VLAN Parameters
VLAN ID Filter
Any
Tag Priority
Any
Specific
Apply

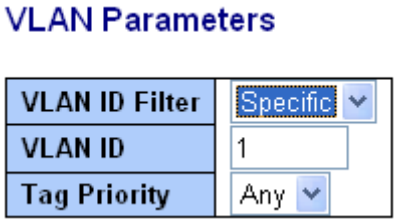
VLAN Parameters
VLAN ID Filter
Specific
VLAN ID
1
Tag Priority
Any

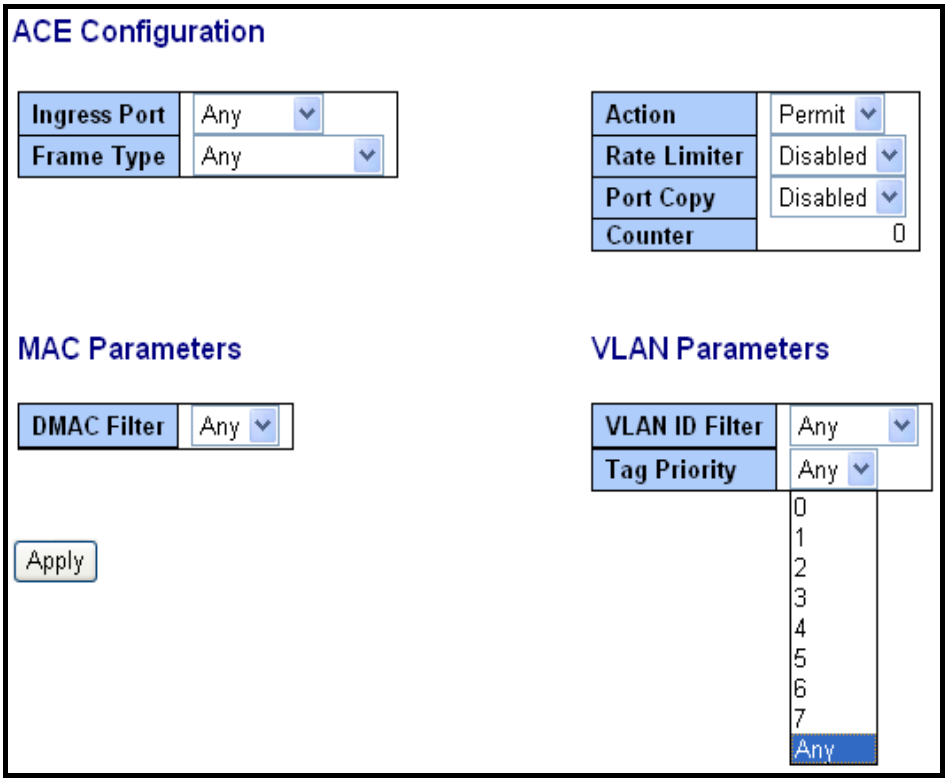
ACE Configuration
Ingress Port
Any
Frame Type
Any
Action
Permit
Rate Limiter
Disabled
Port Copy
Disabled
Counter
0
MAC Parameters
DMAC Filter
Any
VLAN Parameters
VLAN ID Filter
Any
Tag Priority
Any
0
1
2
3
4
5
6
7
Any
Apply

Function name:

ACE Configuration

Function description:

The switch ACL function support up to 128 Access Control Entries (ACEs), using the shared 128 ACEs for ingress classification. You can create an ACE and assign this ACE for each port with <Any> or assign this ACE for a policy or assign this ACE for a port. There are 8 policies, each port can select one of policy, then decides which of the Permit/Deny, Rate Limitation and Port Copy actions would take according to the ACL configuration packet's IPv4, EtherType, ARP Protocol, MAC Parameters and VLAN parameters.

Parameter description:

Ingress Port:

Range: **Any / Policy 1-8 / Port 1-24**

Any: Apply this ACE rule for each port ingress classification

Policy 1-8: Apply this ACE rule for specific policy

Port 1-24: Apply this ACE rule for specific port ingress classification

IP Protocol Filter:

Range: **Any / Ethernet Type / ARP / IPv4**

Any: It is including all frame type

Ethernet Type: It is including all Ethernet frame type

ARP: It is including all ARP protocol frame type

IPv4: It is including all IPv4 protocol frame type

MAC Parameters: (When Frame Type = Any)

DMAC Filter:

Range: **Any / MC / BC / UC**

Any: It is including all destination MAC address

MC: It is including all Multicast MAC address

BC: It is including all Broadcast MAC address

UC: It is including all Unicast MAC address

MAC Parameters: (When Frame Type = Ethernet Type)

SMAC Filter:

Range: **Any / Specific**

Any: It is including all source MAC address

Specific: It is according to SMAC Value specific the source MAC address

DMAC Filter:

Range: **Any / MC / BC / UC / Specific**

Any: It is including all destination MAC address

MC: It is including all Multicast MAC address

BC: It is including all Broadcast MAC address

UC: It is including all Unicast MAC address

Specific: It is according to DMAC Value specific the destination MAC address

MAC Parameters: (When Frame Type = ARP)

SMAC Filter:

Range: **Any / Specific**

Any: It is including all source MAC address

Specific: It is according to SMAC Value specific the source MAC address

DMAC Filter:

Range: **Any / MC / BC / UC**

Any: It is including all destination MAC address

MC: It is including all Multicast MAC address

BC: It is including all Broadcast MAC address

UC: It is including all Unicast MAC address

MAC Parameters: (When Frame Type = IPv4)

DMAC Filter:

Range: **Any / MC / BC / UC**

Any: It is including all destination MAC address

MC: It is including all Multicast MAC address

BC: It is including all Broadcast MAC address

UC: It is including all Unicast MAC address

Ether Type Parameters: (When Frame Type = Ethernet Type)

EtherType Filter:

Range: **Any / Specific**

Any: It is including all Ethernet frame type

Specific: It is according to specific Ethernet Type Value.

Ethernet Type Value:

The Ethernet Type Range: **0x600-0xFFFF**

ARP Parameters: (When Frame Type = ARP)

ARP/RARP:

Range: **Any / ARP / RARP / Other**

Any: Including all ARP/RARP protocol frame types

ARP: Including all ARP protocol frame types

RARP: Including all RARP frame types

Other: Including other frame types except ARP/RARP protocol

Request/Reply:

Range: **Any / Request / Reply**

Any: Including all ARP/RARP Request and Reply

Request: Including all ARP/RARP request frames

Reply: Including all ARP/RARP reply frames

Sender IP Filter:

Range: **Any / Host / Network**

Any: Including all sender IP address

Host: Only one specific sender host IP address

Network: A specific IP subnet segment under the sender IP mask

Sender IP Address:

Default: **192.168.1.1**

Sender IP Mask:

Default: **255.255.255.0**

Target IP Filter:

Range: **Any / Host / Network**

Any: Including all target IP address

Host: Only one specific target host IP address

Network: A specific IP subnet segment under the target IP mask

Target IP Address:

Default: **192.168.1.254**

Target IP Mask:

Default: **255.255.255.0**

ARP SMAC Match:

Range: **Any / 0 / 1**

Any:

Both 0 and 1

0:

The ingress ARP frames where the source MAC address is not equal SMAC under MAC parameter setting

1:

The ingress ARP frames where the source MAC address is equal SMAC address under MAC parameter setting

RARP DMAC Match:

Range: **Any / 0 / 1**

Any:

Both 0 and 1

0:

The ingress RARP frames where the Destination MAC address is not equal DMAC address under MAC parameter setting

1:

The ingress RARP frames where the Destination MAC address is equal DMAC address under MAC parameter setting

IP/Ethernet Length:

Range: **Any / 0 / 1**

Any:

Both 0 and 1

0:

The ingress ARP/PARP frames where the Hardware size is not equal to “0x6” or the Protocol size is not equal to “0x4”.

1:

The ingress ARP/PARP frames where the Hardware size is equal to "0x6" and the Protocol size is to "0x4".

IP:

Range: **Any / 0 / 1**

Any:

Both 0 and 1

0:

The ingress ARP/PARP frames where Protocol type is not equal to “0x800".

1:

The ingress ARP/PARP frames where Protocol type is equal to “0x800”.

Ethernet:

Range: **Any / 0 / 1**

Any:

Both 0 and 1

0:

The ingress ARP/PARP frames where Hardware type is not equal to "0x100".

1:

The ingress ARP/PARP frames where Hardware type is equal "0x100".

IP Parameters: ***(When Frame Type = IPv4 and IP Protocol Filter = Any)***

IPTTL: (Time To Live)

How many routers a datagram can pass through. Each router decrements this value by 1 until it reaches 0 when the datagram is discarded. This keeps misrouted datagrams from remaining on the Internet forever

Range: **Any / Non-zero / Zero**

Any: Including all conditions for IPTTL

Non-Zero: Including IPTTL is Non-Zero

Zero: Including IPTTL is zero

IP Fragment: (IP Fragmentation Flag)

Controls datagram fragmentation together with the identification field. The flags indicate whether the datagram may be fragmented, whether the datagram is fragmented, and whether the current fragment is the final one.

Range: **Any / Yes / No**

Any: Including all IP fragment case

Yes: The ingress frame is fragmented packet

No: The ingress frames is not fragmented packet

IP Option:

A list of optional specifications for security restrictions, route recording, and source routing. Not every datagram specifies an options field.

Range: **Any / Yes / No**

Any: Including all IP option case

Yes: The ingress frame is specified IP options

No: The ingress frame is not specified IP options

SIP Filter: (SIP Source IP Address)

Range: **Any / Host / Network**

Any: Including all source IP address

Host: Only one specific source host IP address

Network: A specific IP subnet segment under the source IP mask

SIP Address:

Default: **192.168.1.1**

SIP Mask:

Default: **255.255.255.0**

DIP Filter: (DIP Destination IP Address)

Range: **Any / Host / Network**

Any: Including all destination IP address

Host: Only one specific destination host IP address

Network: A specific IP subnet segment under the destination IP mask

DIP Address:

Default: **192.168.1.254**

DIP Mask:

Default: **255.255.255.0**

IP Parameters: (Frame Type = IPv4 and IP Protocol Filter = ICMP)

ICMP Type Filter:

Range: **Any / Specific**

Any: Including all types of ICMP type values

Specific: According to following ICMP type value setting for ingress classification

ICMP Type Value:

Range: **0-255**

ICMP Code Filter:

Range: **Any / Specific**

Any: Including all of ICMP code values

Specific: According to following ICMP code value setting for ingress classification

ICMP Code Value:

Range: **0-255**

IP Parameters: (Frame Type = IPv4 and IP Protocol Filter = UDP)

Source Port Filter:

Range: **Any / Specific / Range**

Any: Including all UDP source ports

Specific:

According to following Source Port No. setting for ingress classification

Range:

According to following Source Port Range setting for ingress classification

Source Port No.:

Range: **0-65535**

Source Port Range.:

Range: **0-65535**

Dest. Port Filter:

Range: **Any / Specific / Range**

Any: Including all UDP destination ports

Specific:

According to following Dest. Port No. setting for ingress classification

Range:

According to following Dest. Port Range setting for ingress classification

Dest. Port No.: (Destination Port Number)

Range: **0-65535**

Dest. Port Range.: (Destination Port Range)

Range: **0-65535**

IP Parameters: (Frame Type = IPv4 and IP Protocol Filter = TCP)

Source Port Filter:

Range: **Any / Specific / Range**

Any: Including all TCP source ports

Specific:

According to following Source Port No. setting for ingress classification

Range:

According to following Source Port Range setting for ingress classification

Source Port No.:

Range: **0-65535**

Source Port Range.:

Range: **0-65535**

Dest. Port Filter:

Range: **Any / Specific / Range**

Any: Including all TCP destination ports

Specific:

According to following Dest. Port No. setting for ingress classification

Range:

According to following Dest. Port Range setting for ingress classification

Dest. Port No.:

Range: **0-65535**

Dest. Port Range.:

Range: **0-65535**

TCP FIN:

TCP Control Bit FIN: Means No more data from sender

Range: **Any / 0 / 1**

Any: Including all TCP FIN case

0: The TCP control bit FIN is 0

1: The TCP control bit FIN is 1

TCP SYN:

TCP Control Bit SYN: Means Synchronize sequence numbers

Range: **Any / 0 / 1**

Any: Including all TCP SYN case

0: The TCP control bit SYN is 0

1: The TCP control bit SYN is 1

TCP RST:

TCP Control Bit RST: Means Reset the connection

Range: **Any / 0 / 1**

Any: Including all TCP RST case

0: The TCP control bit RST is 0

1: The TCP control bit RST is 1

TCP PSH:

TCP Control Bit PSH: Means Push Function

Range: **Any / 0 / 1**

Any: Including all TCP PSH case

0: The TCP control bit PSH is 0

1: The TCP control bit PSH is 1

TCP ACK:

TCP Control Bit ACK: Means Acknowledgment field significant

Range: **Any / 0 / 1**

Any: Including all TCP ACK case

0: The TCP control bit ACK is 0

1: The TCP control bit ACK is 1

TCP URG:

TCP Control Bit URG: Means Urgent Pointer field significant

Range: **Any / 0 / 1**

Any: Including all TCP URG case

0: The TCP control bit URG is 0

1: The TCP control bit URG is 1

IP Protocol Value:

The IP Protocol value is TCP options may occupy space at the end of the TCP header and are a multiple of 8 bits in length. Currently defined options include (kind indicated in octal):

0 - End of option list

1 - No-Operation

Range: **Any / 0 / 1**

Any: Including all IP protocol value case

0: The IP protocol value is 0

1: The IP protocol value is 1

IP Parameters: (Frame Type = IPv4 and IP Protocol Filter = Other)

IP Protocol Value

Default: **255**

IPTTL: (Time To Live)

How many routers a datagram can pass through. Each router decrements this value by 1 until it reaches 0 when the datagram is discarded. This keeps misrouted datagrams from remaining on the Internet forever

Range: **Any / Non-zero / Zero**

Any: Including all conditions for IPTTL

Non-Zero: Including IPTTL is Non-Zero

Zero: Including IPTTL is zero

IP Fragment: (IP Fragmentation Flag)

Controls datagram fragmentation together with the identification field. The flags indicate whether the datagram may be fragmented, whether the datagram is fragmented, and whether the current fragment is the final one.

Range: **Any / Yes / No**

Any: Including all IP fragment case

Yes: The ingress frame is fragmented packet

No: The ingress frames is not fragmented packet

IP Option:

A list of optional specifications for security restrictions, route recording, and source routing. Not every datagram specifies an options field.

Range: **Any / Yes / No**

Any: Including all IP option case

Yes: The ingress frame is specified IP options

No: The ingress frame is not specified IP options

SIP Filter: (SIP Source IP Address)

Range: **Any / Host / Network**

Any: Including all source IP address

Host: Only one specific source host IP address

Network: A specific IP subnet segment under the source IP mask

SIP Address:

Default: **192.168.1.1**

SIP Mask:

Default: **255.255.255.0**

DIP Filter: (DIP Destination IP Address)

Range: **Any / Host / Network**

Any: Including all destination IP address

Host: Only one specific destination host IP address

Network: A specific IP subnet segment under the destination IP mask

DIP Address:

Default: **192.168.1.254**

DIP Mask:

Default: **255.255.255.0**

VLAN Parameters:

VLAN ID Filter:

Range: **Any / Specific**

Any: Including all VLAN IDs

Specific: According to following VLAN ID and Tag Priority setting for ingress classification

VLAN ID:

Range: **1-4094**

Tag Priority:

Range: **Any / 0-7**

Any: Including all Tag Priority values

0-7: The Tag Priority Value is one of number (0-7)

Action Parameters:

When the ingress frame meets above ACL ingress classification rule you can do the following actions:

Action:

Range: **Permit / Deny**

Permit:

Permit the met ACL ingress classification rule packets forwarding to other ports on the switch

Deny:

Discard the met ACL ingress classification rule packets

Rate Limiter:

Range: **Disabled / 1-16**

Disable: Disable Rate Limiter function

1-16: Apply the Rate Limiter Number setting for met ACL ingress rule packtes

Port Copy:

Range: **Disabled / 1-24**

Disable: Disable the Port Copy function

1-24: The packets will be copied to the selected port when they met ACL ingress rule.

4.9.4 Wizard

Function name:

Wizard

Function description:

The wizard function provides 4 type of typical application for user easy to configure their application with ACL function.

Parameter description:

Please select an Action:

Set up Policy Rules / Set up Port Policies / Set up Typical Network Application Rules / Set up Source MAC and Source IP Binding

Next:

Click on **<Next>** to confirm current setting and go to next step automatically.

Cancel:

Cancel current setting back to top layer in the ACL wizard function

Back:

Click on **<Back>** to back to previous step

Wizard Again:

Click on **<Wizard Again>** the UI will back to top layer in the wizard function

Finish:

Click in <**Finish**> to finish the ACL Wizard setting, it will according the selection items to change the related parameters, then you have to click on <**Apply**> to confirm the all changed parameters setting.

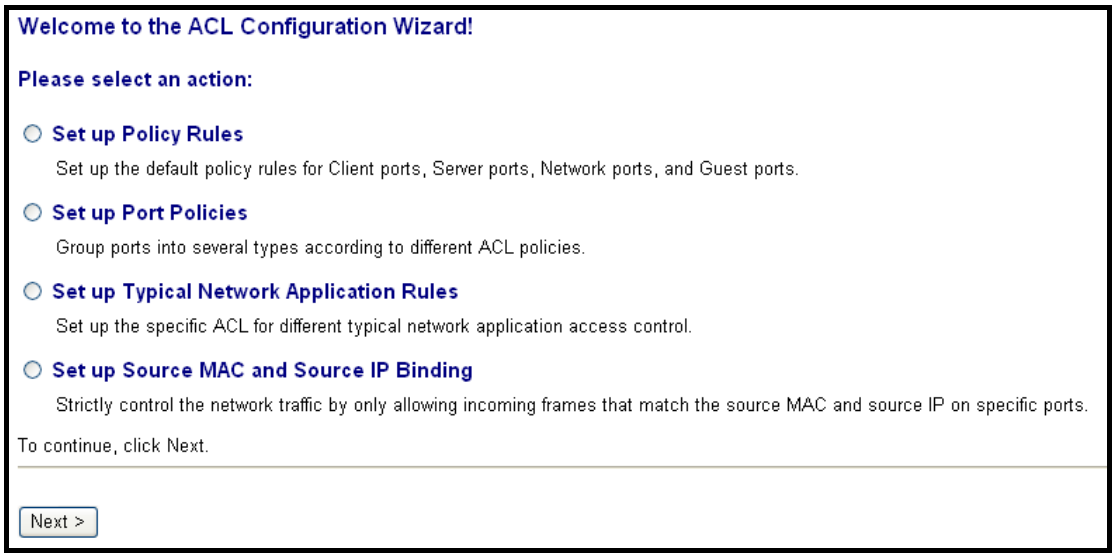
Welcome to the ACL Configuration Wizard!
Please select an action:
Set up Policy Rules
Set up the default policy rules for Client ports, Server ports, Network ports, and Guest ports.
Set up Port Policies
Group ports into several types according to different ACL policies.
Set up Typical Network Application Rules
Set up the specific ACL for different typical network application access control.
Set up Source MAC and Source IP Binding
Strictly control the network traffic by only allowing incoming frames that match the source MAC and source IP on specific ports.
To continue, click Next.
Next >

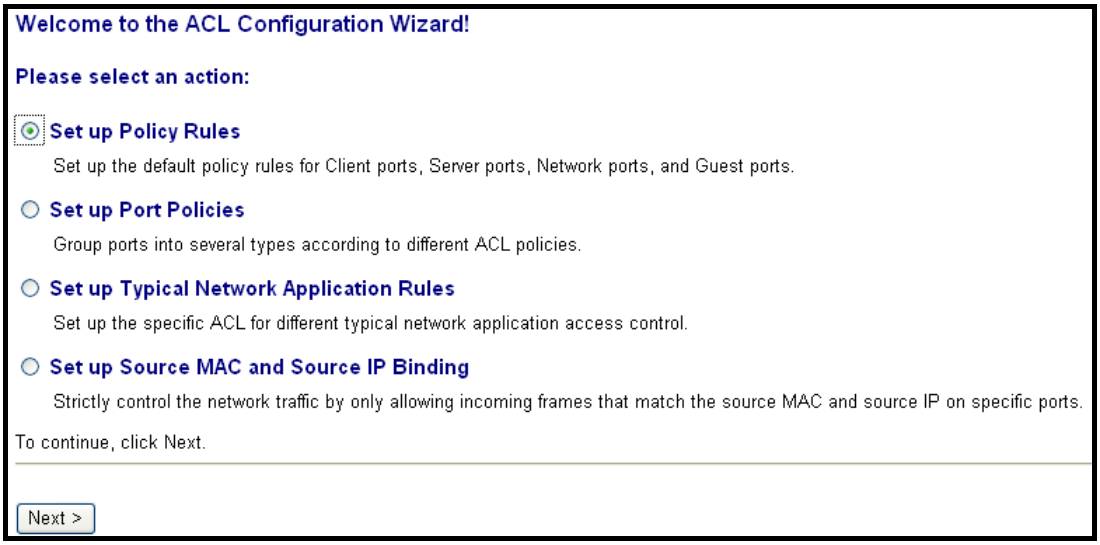
Welcome to the ACL Configuration Wizard!
Please select an action:
Set up Policy Rules
Set up the default policy rules for Client ports, Server ports, Network ports, and Guest ports.
Set up Port Policies
Group ports into several types according to different ACL policies.
Set up Typical Network Application Rules
Set up the specific ACL for different typical network application access control.
Set up Source MAC and Source IP Binding
Strictly control the network traffic by only allowing incoming frames that match the source MAC and source IP on specific ports.
To continue, click Next.
Next >

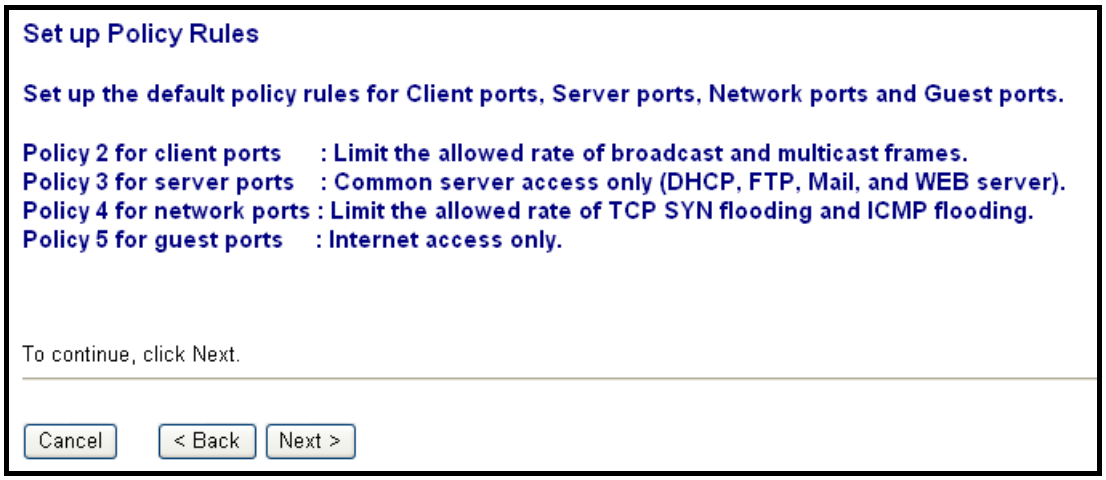
Set up Policy Rules
Set up the default policy rules for Client ports, Server ports, Network ports and Guest ports.
Policy 2 for client ports : Limit the allowed rate of broadcast and multicast frames.
Policy 3 for server ports : Common server access only (DHCP, FTP, Mail, and WEB server).
Policy 4 for network ports : Limit the allowed rate of TCP SYN flooding and ICMP flooding.
Policy 5 for guest ports : Internet access only.
To continue, click Next.
Cancel
< Back
Next >

Finished !
The ACL configuration wizard is finished, and the new configuration is ready for use.
Click Finish to get more information.
Click Wizard Again to start the wizard again.
Wizard Again
Finish

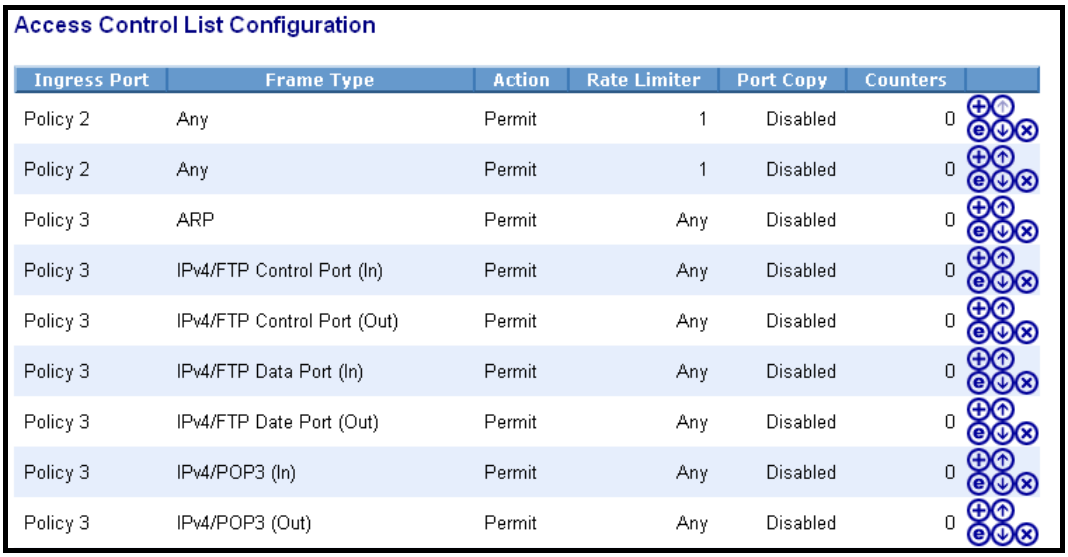
Access Control List Configuration
Ingress Port
Frame Type
Action
Rate Limiter
Port Copy
Counters
Policy 2 Any Permit 1 Disabled 0
Policy 2 Any Permit 1 Disabled 0
Policy 3 ARP Permit Any Disabled 0
Policy 3 IPv4/FTP Control Port (In) Permit Any Disabled 0
Policy 3 IPv4/FTP Control Port (Out) Permit Any Disabled 0
Policy 3 IPv4/FTP Data Port (In) Permit Any Disabled 0
Policy 3 IPv4/FTP Date Port (Out) Permit Any Disabled 0
Policy 3 IPv4/POP3 (In) Permit Any Disabled 0
Policy 3 IPv4/POP3 (Out) Permit Any Disabled 0

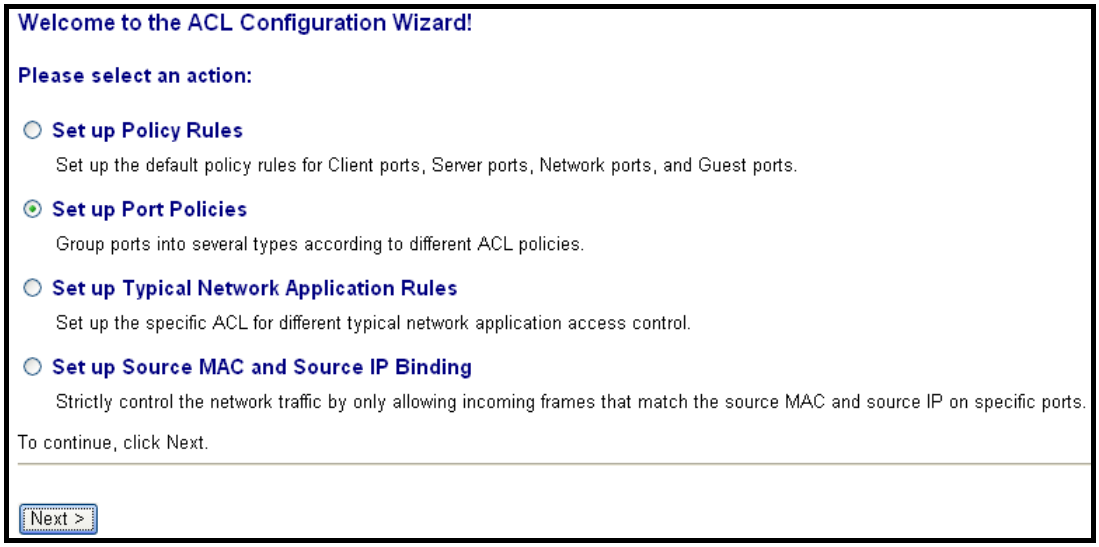
Welcome to the ACL Configuration Wizard!
Please select an action:
Set up Policy Rules
Set up the default policy rules for Client ports, Server ports, Network ports, and Guest ports.
Set up Port Policies
Group ports into several types according to different ACL policies.
Set up Typical Network Application Rules
Set up the specific ACL for different typical network application access control.
Set up Source MAC and Source IP Binding
Strictly control the network traffic by only allowing incoming frames that match the source MAC and source IP on specific ports.
To continue, click Next.
Next >

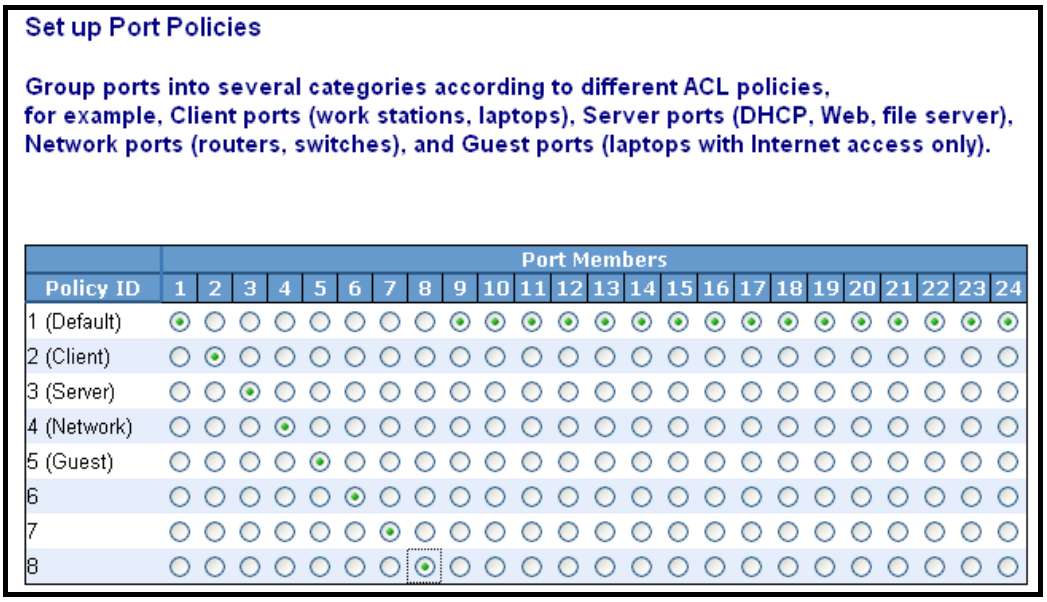
Set up Port Policies
Group ports into several categories according to different ACL policies,
for example, Client ports (work stations, laptops), Server ports (DHCP, Web, file server),
Network ports (routers, switches), and Guest ports (laptops with Internet access only).
Port Members
Policy ID
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
1 (Default)
2 (Client)
3 (Server)
4 (Network)
5 (Guest)
6
7
8

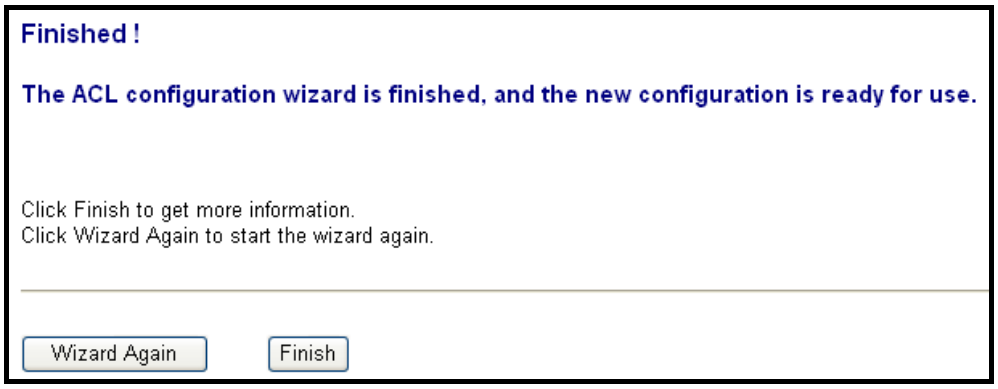
Finished !
The ACL configuration wizard is finished, and the new configuration is ready for use.
Click Finish to get more information.
Click Wizard Again to start the wizard again.
Wizard Again
Finish

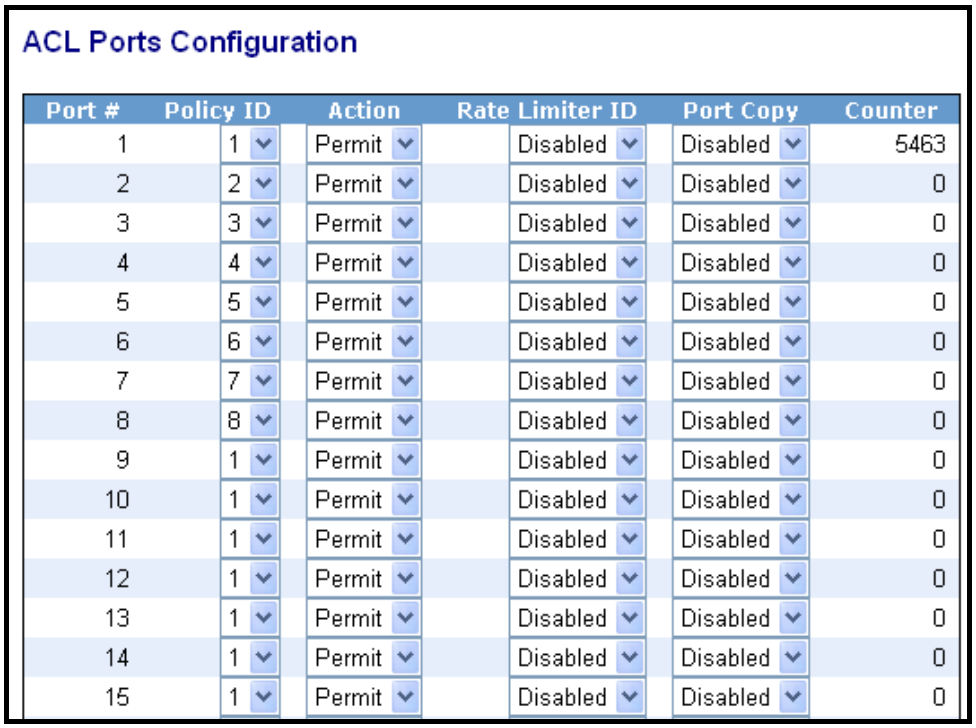

ACL Ports Configuration

Port #	Policy ID	Action	Rate Limiter ID	Port Copy	Counter
1	1	Permit	Disabled	Disabled	5463
2	2	Permit	Disabled	Disabled	0
3	3	Permit	Disabled	Disabled	0
4	4	Permit	Disabled	Disabled	0
5	5	Permit	Disabled	Disabled	0
6	6	Permit	Disabled	Disabled	0
7	7	Permit	Disabled	Disabled	0
8	8	Permit	Disabled	Disabled	0
9	1	Permit	Disabled	Disabled	0
10	1	Permit	Disabled	Disabled	0
11	1	Permit	Disabled	Disabled	0
12	1	Permit	Disabled	Disabled	0
13	1	Permit	Disabled	Disabled	0
14	1	Permit	Disabled	Disabled	0
15	1	Permit	Disabled	Disabled	0

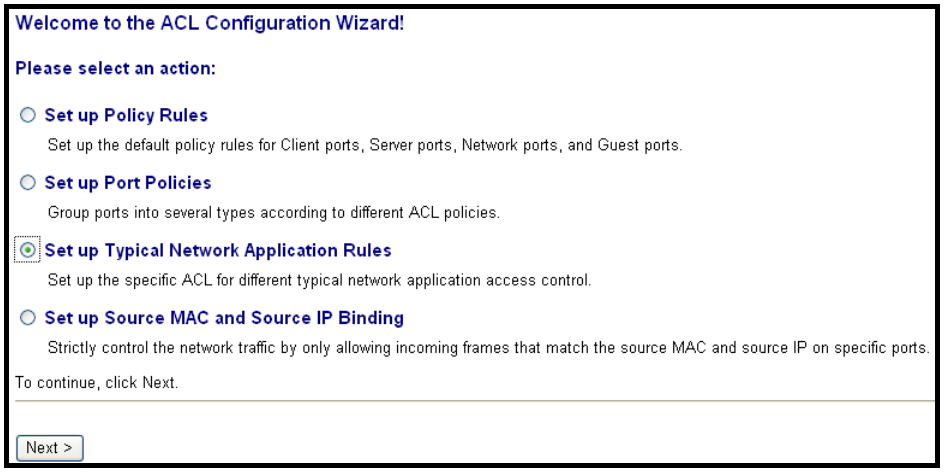

Welcome to the ACL Configuration Wizard!

Please select an action:

- Set up Policy Rules
  Set up the default policy rules for Client ports, Server ports, Network ports, and Guest ports.
- Set up Port Policies
  Group ports into several types according to different ACL policies.
- Set up Typical Network Application Rules
  Set up the specific ACL for different typical network application access control.
- Set up Source MAC and Source IP Binding
  Strictly control the network traffic by only allowing incoming frames that match the source MAC and source IP on specific ports.

To continue, click Next.

Next >

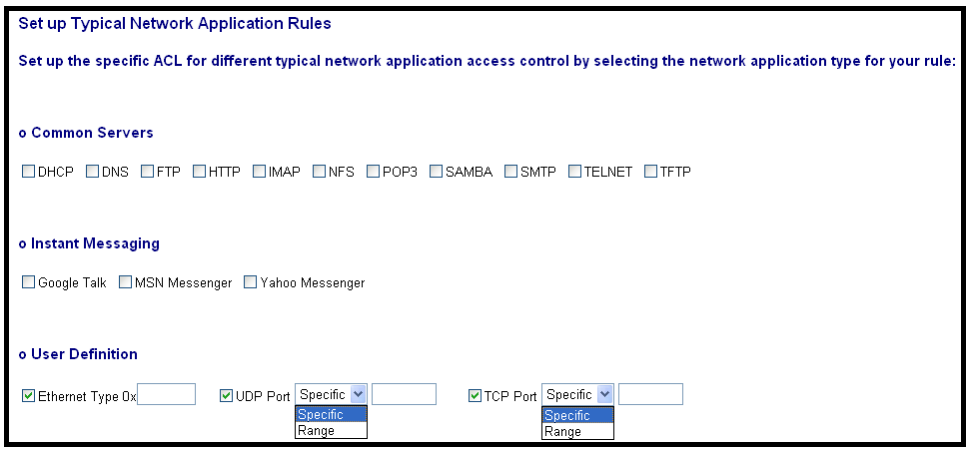

Set up Typical Network Application Rules

Set up the specific ACL for different typical network application access control by selecting the network application type for your rule:

o Common Servers

DHCP DNS FTP HTTP IMAP NFS POP3 SAMBA SMTP TELNET TFTP

o Instant Messaging

Google Talk MSN Messenger Yahoo Messenger

o User Definition

Ethernet Type 0x UDP Port Specific TCP Port Specific

Specific
Range

Specific
Range

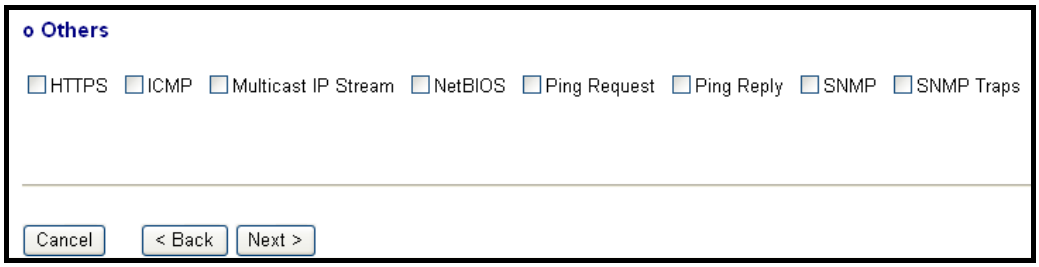
o Others
HTTPS
ICMP
Multicast IP Stream
NetBIOS
Ping Request
Ping Reply
SNMP
SNMP Traps
Cancel
< Back
Next >

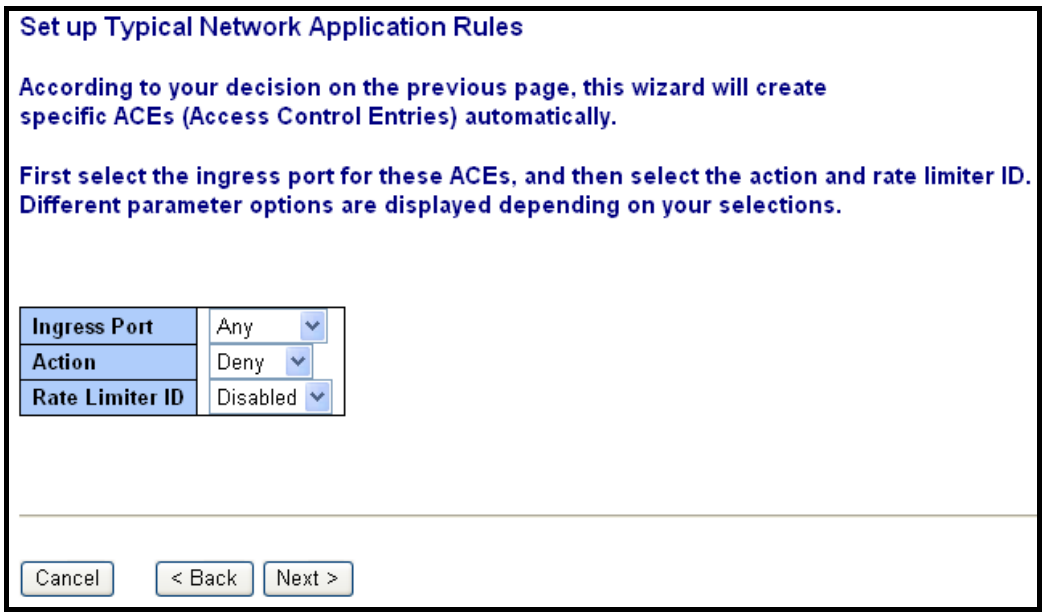
Set up Typical Network Application Rules
According to your decision on the previous page, this wizard will create specific ACEs (Access Control Entries) automatically.
First select the ingress port for these ACEs, and then select the action and rate limiter ID. Different parameter options are displayed depending on your selections.
Ingress Port
Any
Action
Deny
Rate Limiter ID
Disabled
Cancel
< Back
Next >

Finished !
The ACL configuration wizard is finished, and the new configuration is ready for use.
Click Finish to get more information.
Click Wizard Again to start the wizard again.
Wizard Again
Finish

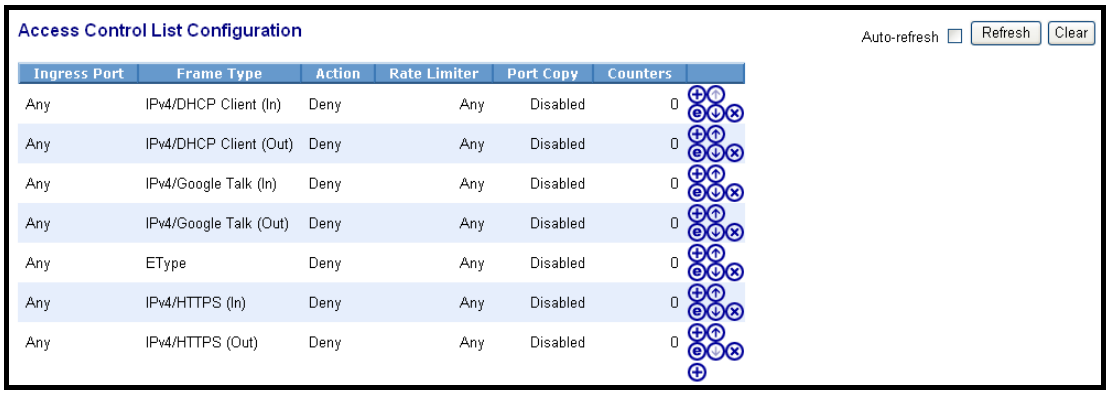
Access Control List Configuration
Auto-refresh
Refresh
Clear
Ingress Port
Frame Type
Action
Rate Limiter
Port Copy
Counters
Any IPv4/DHCP Client (In) Deny Any Disabled 0
Any IPv4/DHCP Client (Out) Deny Any Disabled 0
Any IPv4/Google Talk (In) Deny Any Disabled 0
Any IPv4/Google Talk (Out) Deny Any Disabled 0
Any EType Deny Any Disabled 0
Any IPv4/HTTPS (In) Deny Any Disabled 0
Any IPv4/HTTPS (Out) Deny Any Disabled 0

Parameter description:

Common Server:

DHCP / DNS / FTP / HTTP / IMAP / NFS / POP3 / SAMBA / SMTP / TELNET / TFTP

Instant Messaging:

Google Talk / MSN Messenger / Yahoo Messenger

User Definition:

Ethernet Type / UDP Port / TCP Port

Others:

TCP Port / ICMP / Multicast IP Stream / NetBIOS / Ping Request / Ping Reply / SNMP / SNMP Traps

Ingress Port:

Any / Policy1-8 / Port1-24

Action:

Permit / Deny

Rate Limiter ID:

Disabled / 1-16

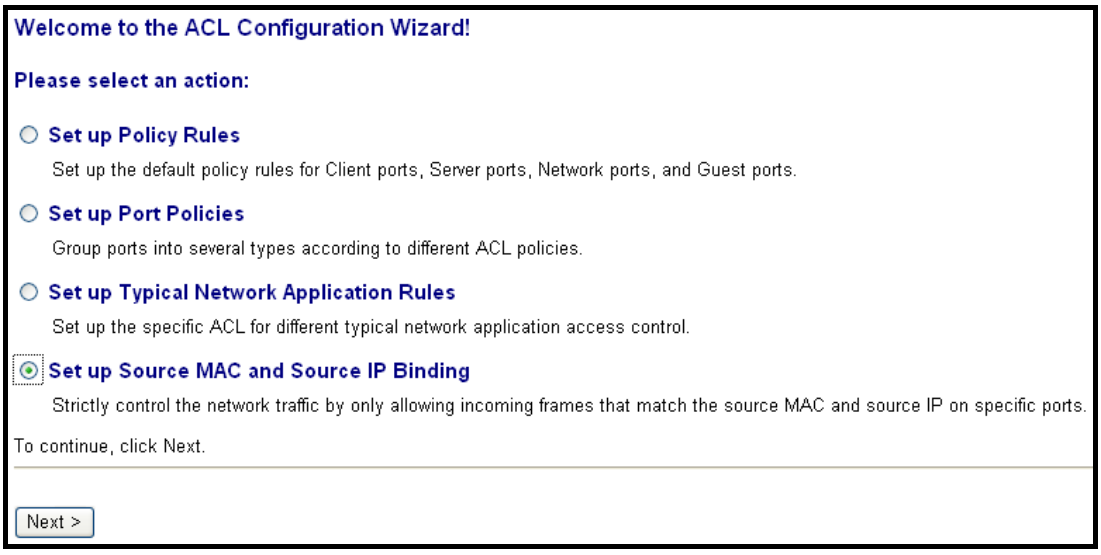
Welcome to the ACL Configuration Wizard!
Please select an action:
Set up Policy Rules
Set up the default policy rules for Client ports, Server ports, Network ports, and Guest ports.
Set up Port Policies
Group ports into several types according to different ACL policies.
Set up Typical Network Application Rules
Set up the specific ACL for different typical network application access control.
Set up Source MAC and Source IP Binding
Strictly control the network traffic by only allowing incoming frames that match the source MAC and source IP on specific ports.
To continue, click Next.
Next >

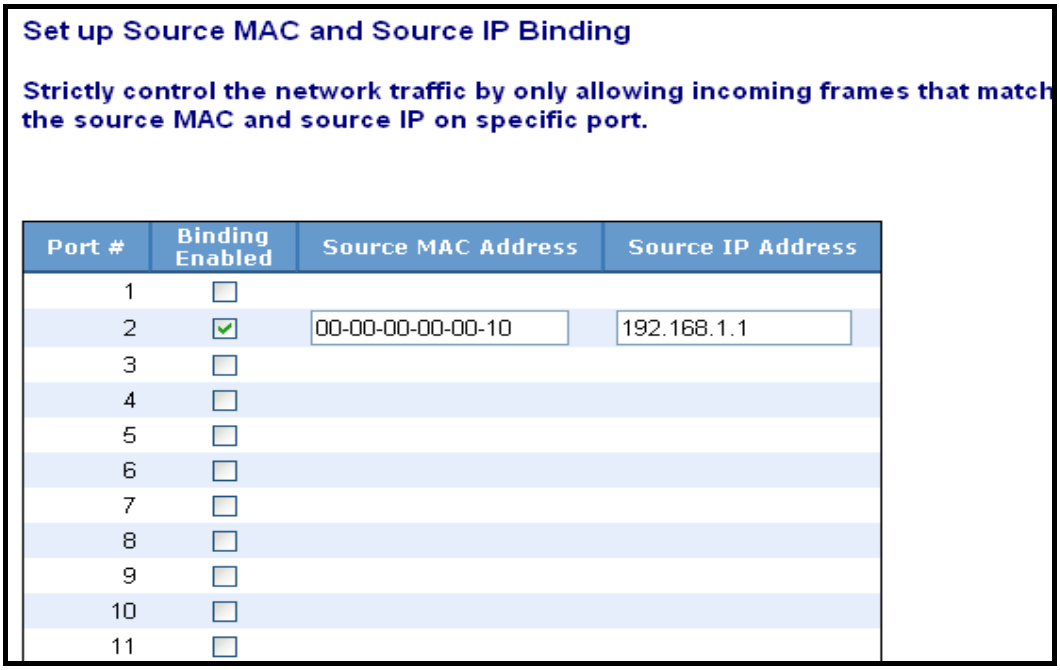
Set up Source MAC and Source IP Binding
Strictly control the network traffic by only allowing incoming frames that match the source MAC and source IP on specific port.
Port #
Binding Enabled
Source MAC Address
Source IP Address
1
2
00-00-00-00-00-10
192.168.1.1
3
4
5
6
7
8
9
10
11

Finished !
The ACL configuration wizard is finished, and the new configuration is ready for use.
Click Finish to get more information.
Click Wizard Again to start the wizard again.
Wizard Again
Finish

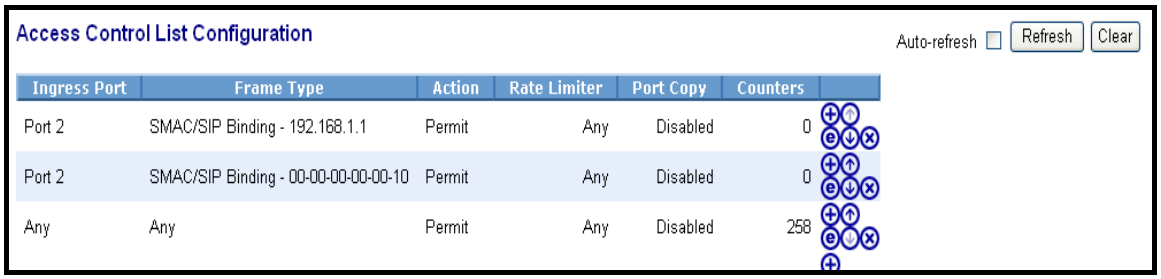

Parameter description:

Port #:

1-24

Binding Enabled:

Use the switch ACL function to support IP/MAC Binding function, the maximum is up to 128 entries.

Source MAC Address:

xx-xx-xx-xx-xx-xx. For example: 00-40-c7-00-00-01

Source IP Address:

xxx.xxx.xxx.xxx. For example: 192.168.1.100

4.10 IP MAC Binding

The IP network layer uses a four-byte address. The Ethernet link layer uses a six-byte MAC address. Binding these two address types together allows the transmission of data between the layers. The primary purpose of IP-MAC binding is to restrict the access to a switch to a number of authorized users. Only the authorized client can access the Switch's port by checking the pair of IP-MAC

Addresses and port number with the pre-configured database. If an unauthorized user tries to access an IP-MAC binding enabled port, the system will block the access by dropping its packet.

4.10.1 IP MAC Binding Configuration

Function name:

IP MAC Binding Configuration

Function description:

The switch has IP-MAC Binding table. The maximum number of IP-MAC binding table is 1024 entries. The creation of authorized users can be manually. User can enable or disable the function for all ports on the switch.

Parameters description:

State:

Disabled / Enabled

Trust Port:

To evoke the port which you want to enable the IP MAC binding service.

MAC:

Six-byte MAC Address: **xx-xx-xx-xx-xx-xx.** For example: 00-40-c7-00-00-01

IP:

Four-byte IP Address: xxx.xxx.xxx.xxx. For example: 192.168.1.100

Port No:

Port no.: 1-24

VID:

VLAN ID: 1-4094

Add:

Input MAC, IP, Port and VID, then click on <Add> to create a new entry into the IP MAC Binding table

Delete:

Select one of entry from the table, then click on <Delete> to delete this entry.

4.10.2 IP MAC Binding Dynamic Entry

Function name:

IP MAC Binding Dynamic Entry

Function description:

It displays the IP MAC Binding dynamic Entry information.

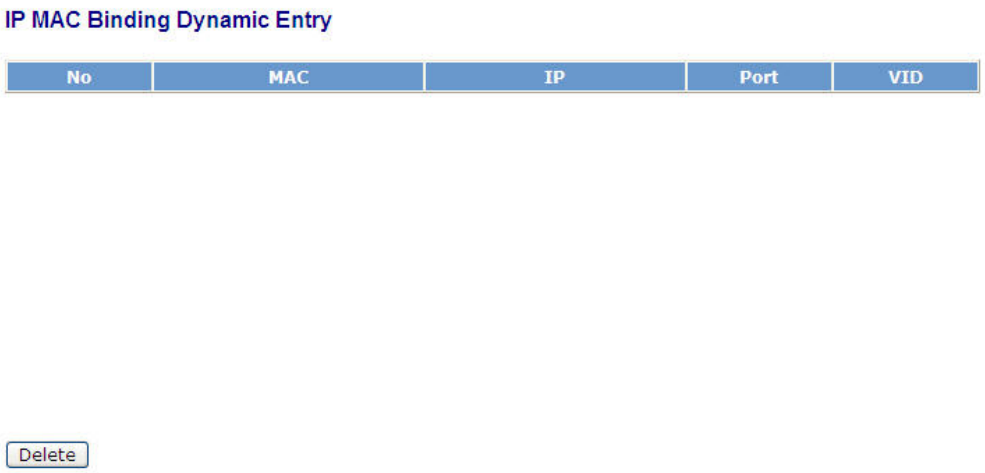

Parameters description:

No:

The index to display the IP MAC Binding Dynamic Entry

MAC:

Six-byte MAC Address: **xx-xx-xx-xx-xx-xx.** For example: 00-40-c7-00-00-01

IP:

Four-byte IP Address: xxx.xxx.xxx.xxx. For example: 192.168.1.100

Port No:

Port no.: 1-24

VID:

VLAN ID: 1-4094

4.11 802.1X Configuration

802.1X port-based network access control provides a method to restrict users to access network resources via authenticating user's information. This restricts users from gaining access to the network resources through a 802.1X-enabled port without authentication. If a user wishes to touch the network through a port under 802.1X control, he (she) must firstly input his (her) account name for authentication and waits for gaining authorization before sending or receiving any packets from a 802.1X-enabled port.

Before the devices or end stations can access the network resources through the ports under 802.1X control, the devices or end stations connected to a controlled port send the authentication request to the authenticator, the authenticator pass the request to the authentication server to authenticate and verify, and the server tell the authenticator if the request get the grant of authorization for the ports.

According to IEEE802.1X, there are three components implemented. They are Authenticator, Supplicant and Authentication server shown in below figure.

Supplicant:

It is an entity being authenticated by an authenticator. It is used to communicate with the Authenticator **PAE (Port Access Entity)** by exchanging the authentication message when the Authenticator PAE request to it.

Authenticator:

An entity facilitates the authentication of the supplicant entity. It controls the state of the port, authorized or unauthorized, according to the result of authentication message exchanged between it and a supplicant PAE.

The authenticator may request the supplicant to re-authenticate itself at a configured time period. Once start re-authenticating the supplicant, the controlled port keeps in the authorized state until re-authentication fails.

A port acting as an authenticator is thought to be two logical ports, a controlled port and an uncontrolled port. A controlled port can only pass the packets when the authenticator PAE is authorized, and otherwise, an uncontrolled port will unconditionally pass the packets with PAE group MAC address, which has the value of 01-80-c2-00-00-03 and will not be forwarded by MAC bridge at any time.

Authentication server:

A device provides authentication service, through EAP, to an authenticator by using authentication credentials supplied by the supplicant to determine if the supplicant is authorized to access the network resource.

The overview of operation flow is quite simple. When Supplicant PAE issues a request to Authenticator PAE, Authenticator and Supplicant exchanges authentication message. Then, Authenticator passes the request to RADIUS server to verify. Finally, RADIUS server replies if the request is granted or denied.

While in the authentication process, the message packets, encapsulated by Extensible Authentication Protocol over LAN (EAPOL), are exchanged between an authenticator PAE and a supplicant PAE. The Authenticator exchanges the message to authentication server using EAP encapsulation. Before successfully authenticating, the supplicant can only touch the authenticator to perform authentication message exchange or access the network from the uncontrolled port.

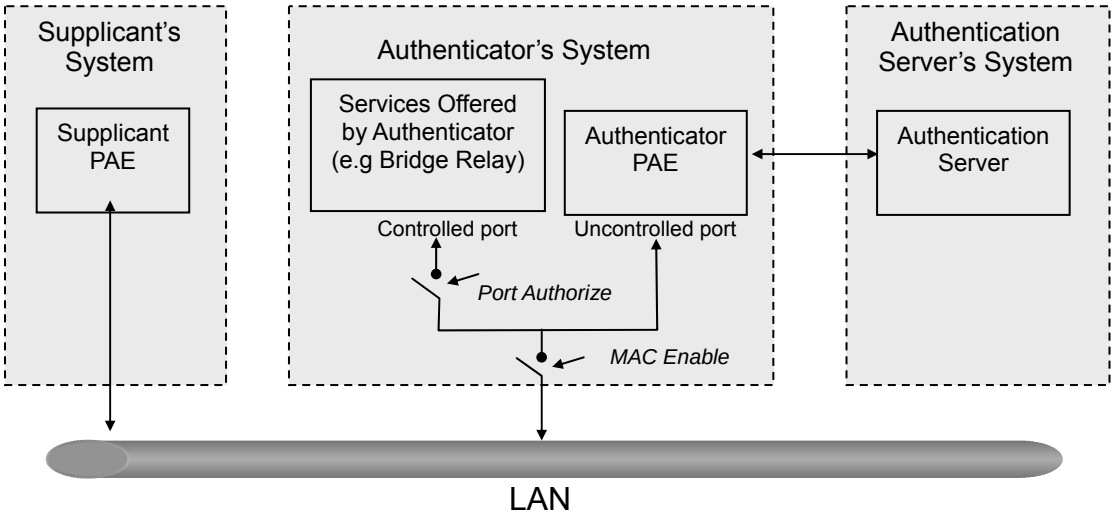

In below figure, this is the typical configuration, a single supplicant, an authenticator and an authentication server. B and C is in the internal network, D is Authentication server running RADIUS, switch at the central location acts Authenticator connecting to PC A and A is a PC outside the controlled port, running Supplicant PAE. In this case, PC A wants to access the services on device B and C, first, it must exchange the authentication message with the authenticator on the port it connected via EAPOL packet. The authenticator transfers the supplicant's credentials to Authentication server for verification. If success, the authentication server will notice the authenticator the grant. PC A, then, is allowed to access B and C via the switch. If there are two switches directly connected together instead of single one, for the link connecting two switches, it may have to act two port roles at the end of the link: authenticator and supplicant, because the traffic is bi-directional.

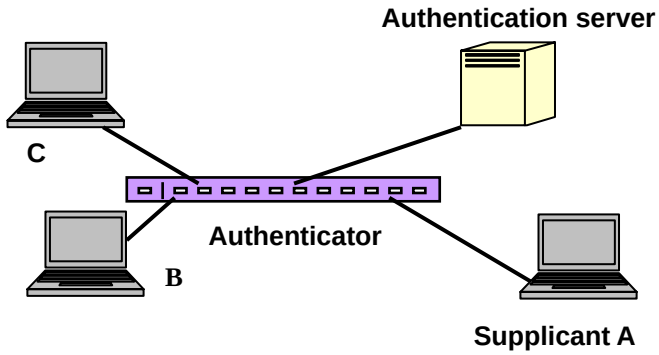

The below figure shows the procedure of 802.1X authentication. There are steps for the login based on 802.1X port access control management. The protocol used in the right side is EAPOL and the left side is EAP.

1. At the initial stage, the supplicant A is unauthenticated and a port on switch acting as an authenticator is in unauthorized state. So the access is blocked in this stage.
2. Initiating a session. Either authenticator or supplicant can initiate the message exchange. If supplicant initiates the process, it sends EAPOL-start packet to the

authenticator PAE and authenticator will immediately respond EAP-Request/Identity packet.

3. The authenticator always periodically sends EAP-Request/Identity to the supplicant for requesting the identity it wants to be authenticated.
4. If the authenticator doesn't send EAP-Request/Identity, the supplicant will initiate EAPOL-Start the process by sending to the authenticator.
5. And next, the Supplicant replies an EAP-Response/Identity to the authenticator. The authenticator will embed the user ID into Radius-Access-Request command and send it to the authentication server for confirming its identity.
6. After receiving the Radius-Access-Request, the authentication server sends Radius-Access-Challenge to the supplicant for asking for inputting user password via the authenticator PAE.
7. The supplicant will convert user password into the credential information, perhaps, in MD5 format and replies an EAP-Response with this credential information as well as the specified authentication algorithm (MD5 or OTP) to Authentication server via the authenticator PAE. As per the value of the type field in message PDU, the authentication server knows which algorithm should be applied to authenticate the credential information, EAP-MD5 (Message Digest 5) or EAP-OTP (One Time Password) or other else algorithm.
8. If user ID and password is correct, the authentication server will send a Radius-Access-Accept to the authenticator. If not correct, the authentication server will send a Radius-Access-Reject.
9. When the authenticator PAE receives a Radius-Access-Accept, it will send an EAP-Success to the supplicant. At this time, the supplicant is authorized and the port connected to the supplicant and under 802.1X control is in the authorized state. The supplicant and other devices connected to this port can access the network. If the authenticator receives a Radius-Access-Reject, it will send an EAP-Failure to the supplicant. This means the supplicant is failed to authenticate. The port it connected is in the unauthorized state, the supplicant and the devices connected to this port won't be allowed to access the network.
10. When the supplicant issue an EAP-Logoff message to Authentication server, the port you are using is set to be unauthorized.

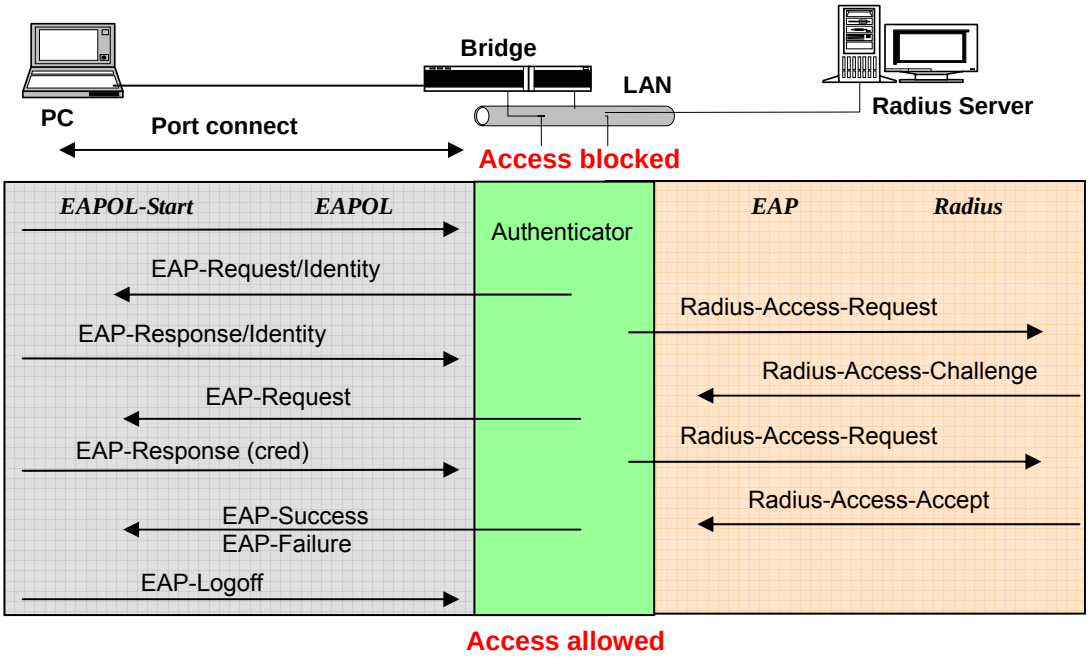

Only MultiHost 802.1X is the type of authentication supported in the switch. In this mode, for the devices connected to this port, once a supplicant is authorized, the devices connected to this port can access the network resource through this port.

802.1X Port-based Network Access Control function supported by the switch is little bit complex, for it just support basic Multihost mode, which can distinguish the device's MAC address and its VID. The following table is the summary of the combination of the authentication status and the port status versus the status of port mode, set in 802.1X Port mode, port control state, set in 802.1X port setting. Here Entry Authorized means MAC entry is authorized.

Port Mode	Port Control	Authentication	Port Status
Disable	Don't Care	Don't Care	Port Uncontrolled
Multihost	Auto	Successful	Port Authorized
Multihost	Auto	Failure	Port Unauthorized
Multihost	ForceUnauthorized	Don't Care	Port Unauthorized
Multihost	ForceAuthorized	Don't Care	Port Authorized

4.11.1 Server

Function name:

802.1X Server Configuration

Function description:

This function is used to configure the global parameters for RADIUS authentication in 802.1X port security application.

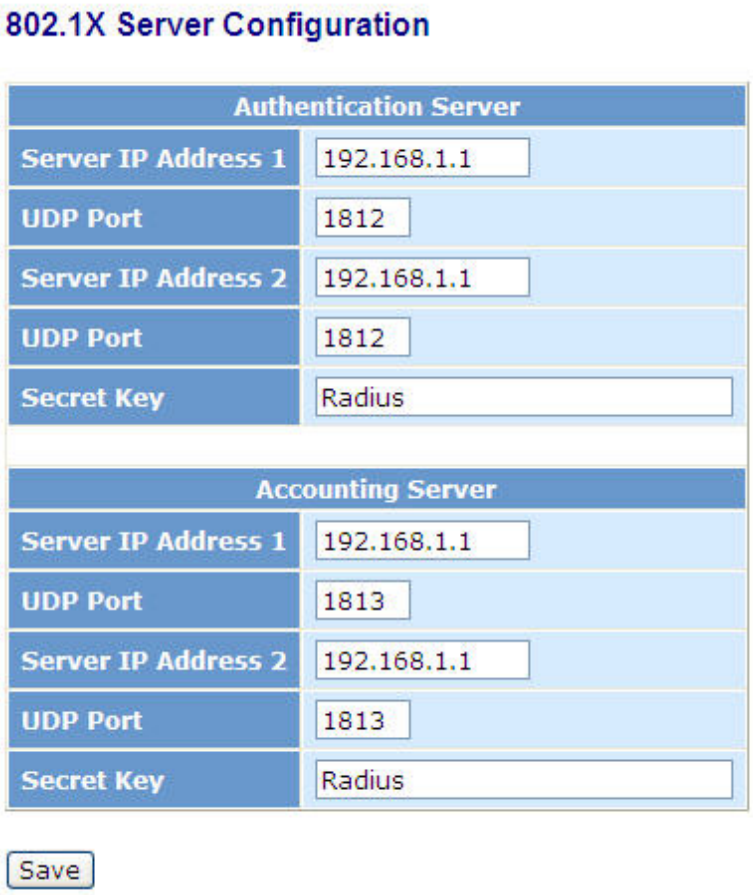

Parameter description:

Authentication Server

Server IP Server:

Server IP address for authentication. Default: **192.168.1.1**

UDP Port:

Default port number is 1812.

Secret Key:

The secret key between authentication server and authenticator. It is a string with the length 1 – 31 characters. The character string may contain upper case, lower case and 0-9. It is character sense. It is not allowed for putting a blank between any two characters. Default: **Radius**

Accounting Server

Server IP Server:

Server IP address for authentication. Default: **192.168.1.1**

UDP Port:

Default port number is 1812.

Secret Key:

The secret key between authentication server and authenticator. It is a string with the length 1 – 31 characters. The character string may contain upper case, lower case and 0-9. It is character sense. It is not allowed for putting a blank between any two characters. Default: **Radius**

4.11.2 Port Configuration

Function name:

802.1X Port Configuration

Function description:

This function is used to configure the parameters for each port in 802.1X port security application. Refer to the following parameters description for details.

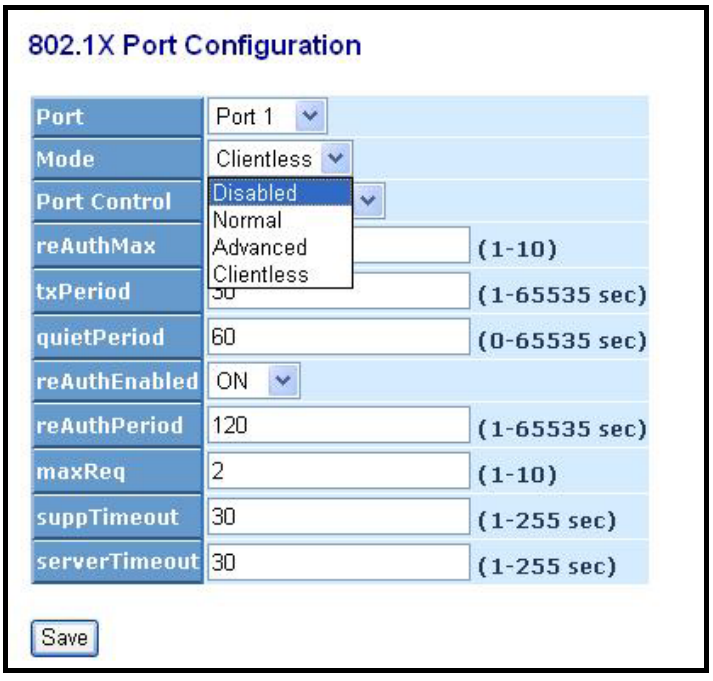

Parameter description:

Port:

It is the port number to be selected for configuring its associated 802.1X

parameters which are Port control, reAuthMax, txPeriod, Quiet Period, reAuthEnabled, reAuthPeriod, max. Request, suppTimeout, serverTimeout and Controlled direction.

Mode:

Range: **Disable / Normal / Advanced / Clientless**

Disable:

Disable IEEE 802.1X for this port.

Normal:

All clients under this port will be authorized when one of the client do 802.1X authentication successfully.

Advanced:

Each client under this port have to do 802.1X authentication by himself.

Clientless:

The clients don't need to install 802.1X client function that means the client PC (for example WINDOW XP) does not need to enable 802.1 X client function also can do 802.1 X authentication. But the network maintainer needs to configure the Radius server using each client's MAC address for Radius account ID and password.

Port Control:

This is used to set the operation mode of authorization. There are three type of operation mode supported, ForceUnauthorized, ForceAuthorized, Auto.

- **ForceUnauthorized:**

  The controlled port is forced to hold in the unauthorized state.

- **ForceAuthorized:**

  The controlled port is forced to hold in the authorized state.

- **Auto:**

  The controlled port is set to be in authorized state or unauthorized state depends on the result of the authentication exchange between the authentication server and the supplicant. Default: **Auto**

reAuthMax(1-10):

The number of authentication attempt that is permitted before the port becomes unauthorized.

Default: **2**

txPeriod(1-65535 s):

A time period to transmitted EAPOL PDU between the authenticator and the supplicant. Default: **30**

Quiet Period(0-65535 s):

A period of time during which we will not attempt to access the supplicant. Deafult: **60 seconds**

reAuthEnabled:

Choose whether regular authentication will take place in this port. Default: **ON**

reAuthPeriod(1-65535 s):

A non-zero number seconds between the periodic re-authentication of the supplicant. Default: **3600**

max. Request(1-10):

The maximum of number times that the authenticator will retransmit an EAP Request to the supplicant before it times out the authentication session. The valid range: 1 – 10. Default: **2 times**

suppTimeout(1-65535 s):

A timeout condition in the exchange between the authenticator and the supplicant. The valid range: 1 –65535. Default: **30 seconds.**

serverTimeout(1-65535 s):

A timeout condition in the exchange between the authenticator and the authentication server. The valid range: 1 –65535. Default: **30 seconds**

4.11.3 802.1X Status

Function name:

802.1X Status

Function description:

Show the each port IEEE 802.1X authentication current operating mode and status.

Parameter description:

Port:

Port number: 1-24

Mode:

Show this port IEEE 802.1X operating mode: There are four modes Disable, Normal, Advance and Clientless

Status:

Show this port IEEE 802.1X security current status: Authorized or Unauthorized

802.1X Status

Port	Mode	Status	Vlan Policy
1	Disable	-	N/A
2	Disable	-	N/A
3	Disable	-	N/A
4	Disable	-	N/A
5	Disable	-	N/A
6	Disable	-	N/A
7	Disable	-	N/A
8	Disable	-	N/A
9	Disable	-	N/A
10	Disable	-	N/A
11	Disable	-	N/A
12	Disable	-	N/A

4.11.4 802.1X Statistics

Function name:

802.1X Port Statistics Port1

Function description:

Show the IEEE 802.1X authentication related counters for manager monitoring authenticator status.

Parameter description:

Port:

Port Number: 1-24

Auto - refresh:

Refresh the authenticator counters in the web UI automatically

Refresh:

Click on the <Refresh> to update the authenticator counters in the web UI

Clear:

Click on the <Clear> to clear all authenticator counters in the web UI

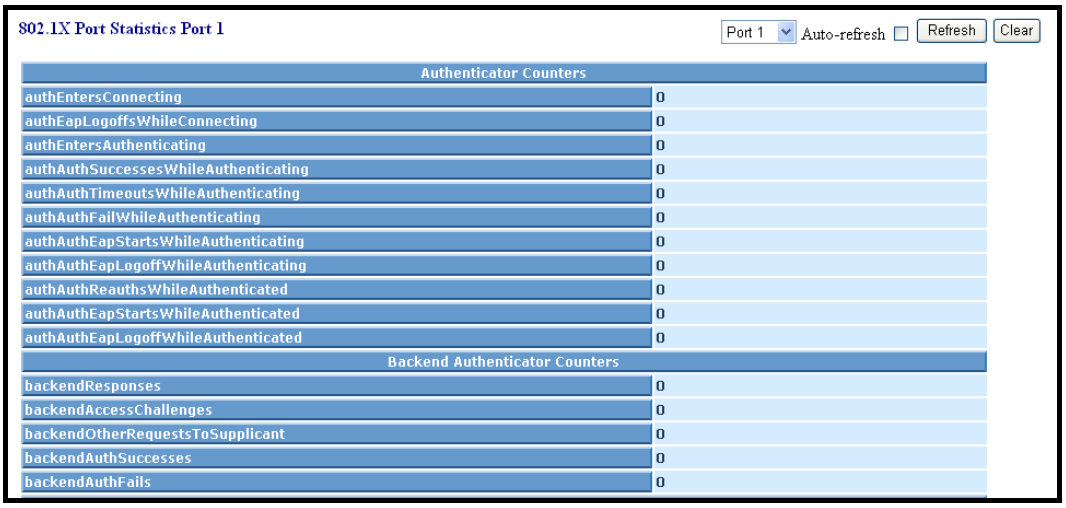

4.12 Trunking Configuration

The Port Trunking Configuration is used to configure the settings of Link Aggregation. You can bundle more than one port with the same speed, full duplex and the same MAC to be a single logical port, thus the logical port aggregates the bandwidth of these ports. This means you can apply your current Ethernet equipments to build the bandwidth aggregation. For example, if there are three Fast Ethernet ports aggregated in a logical port, then this logical port has bandwidth three times as high as a single Fast Ethernet port has.

The switch supports two kinds of port trunking methods:

LACP:

Ports using ***Link Aggregation Control Protocol (according to IEEE 802.3ad specification)*** as their trunking method can choose their unique LACP GroupID (1~8) to form a logic “trunked port”. The benefit of using LACP is that a port makes an agreement with its peer port before it becomes a ready member of a “trunk group” (also called aggregator). LACP is safer than the other trunking method - static trunk.

The switch LACP does not support the followings:

- **Link Aggregation across switches**
- **Aggregation with non-IEEE 802.3 MAC link**
- **Operating in half-duplex mode**
- **Aggregate the ports with different data rates**

Static Trunk:

Ports using Static Trunk as their trunk method can choose their unique ***Static***

GroupID (also 1~8, this Static groupID can be the same with another LACP groupID) to form a logic "trunked port". The benefit of using Static Trunk method is that a port can immediately become a member of a trunk group without any handshaking with its peer port. This is also a disadvantage because the peer ports of your static trunk group may not know that they should be aggregate together to form a "logic trunked port". Using Static Trunk on both end of a link is strongly recommended. Please also note that low speed links will stay in "not ready" state when using static trunk to aggregate with high speed links.

As to system restrictions about the port aggregation function on the switch, In the management point of view, the switch supports ***maximum 8 trunk groups for LACP and additional 8 trunk groups for Static Trunk***. But in the system capability view, only 8 "real trunked" groups are supported. An LACP trunk group with more than one ready member-port is a "real trunked" group. An LACP trunk group with only one or less than one ready member-port is not a "real trunked" group. Any Static trunk group is a "real trunked" group.

Per Trunking Group supports a maximum of 12 ready member-ports. Please note that some decisions will automatically be made by the system while you are configuring your trunking ports. Some configuration examples are listed below:

(1) 12 ports have already used Static Trunk Group ID 1, the 13th port willing to use the same Static Trunk Group ID will be automatically set to use the "None" trunking method and its Group ID will turn to 0. This means the port won't aggregate with other ports.

(2) 14 ports all use LACP Trunk Group ID 1 at most 12 ports can aggregate together and transit into the ready state.

(3) A port using the "None" trunking method or Group ID 0 will be automatically set to use the "None" trunking method with Group ID 0.

4.12.1 Trunking Port Setting/Port

Function name:

Trunk Port Setting/Status

Function description:

Port setting/status is used to configure the trunk property of each and every port in the switch system.

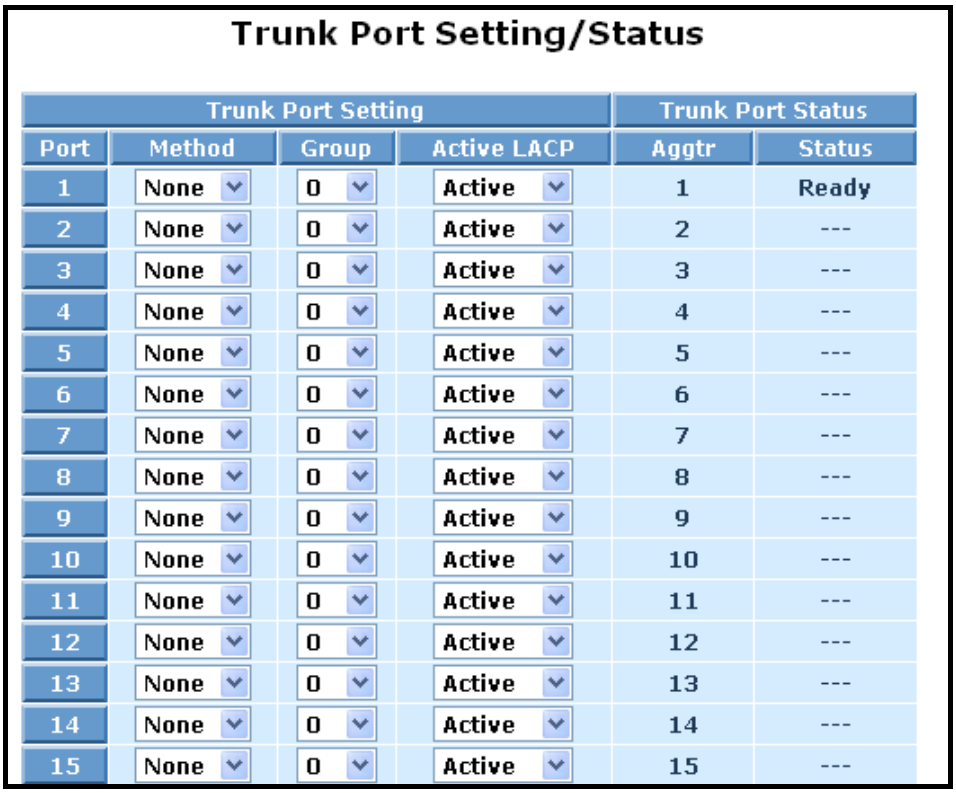

Trunk Port Setting/Status

Trunk Port Setting				Trunk Port Status	
Port	Method	Group	Active LACP	Aggtr	Status
1	None	0	Active	1	Ready
2	None	0	Active	2	---
3	None	0	Active	3	---
4	None	0	Active	4	---
5	None	0	Active	5	---
6	None	0	Active	6	---
7	None	0	Active	7	---
8	None	0	Active	8	---
9	None	0	Active	9	---
10	None	0	Active	10	---
11	None	0	Active	11	---
12	None	0	Active	12	---
13	None	0	Active	13	---
14	None	0	Active	14	---
15	None	0	Active	15	---

Parameter description:

Port:

Port Number: 1-24

Method:

This determines the method a port uses to aggregate with other ports.

None:

A port does not want to aggregate with any other port should choose this default setting.

LACP:

A port use LACP as its trunk method to get aggregated with other ports also using LACP.

Static:

A port use Static Trunk as its trunk method to get aggregated with other ports also using Static Trunk.

Group:

Ports choosing the same trunking method other than “None” must be assigned a unique Group number ***(i.e. Group ID, valid value is from 1 to 8)*** in order to declare that they wish to aggregate with each other.

Active LACP:

This field is only referenced when a port's trunking method is LACP.

Active:

An Active LACP port begins to send LACPDU to its link partner right after the LACP protocol entity started to take control of this port.

Passive:

A Passive LACP port will not actively send LACPDU out before it receives an LACPDU from its link partner.

Aggtr:

Aggtr is an abbreviation of "aggregator". Every port is also an aggregator, and its own aggregator ID is the same as its own Port No. We can regard an aggregator as a representative of a trunking group. Ports with same Group ID and using same trunking method will have the opportunity to aggregate to a particular aggregator port. This aggregator port is usually the port with the smallest Port No. within the trunking group.

Status:

This field represents the trunking status of a port which uses a trunking method other than "None". It also represents the management link status of a port which uses the "None" trunking method. "---" means "not ready"

4.12.2 Aggregation View

Function name:

Aggregator View

Function description:

To display the current port trunking information from the aggregator point of view.

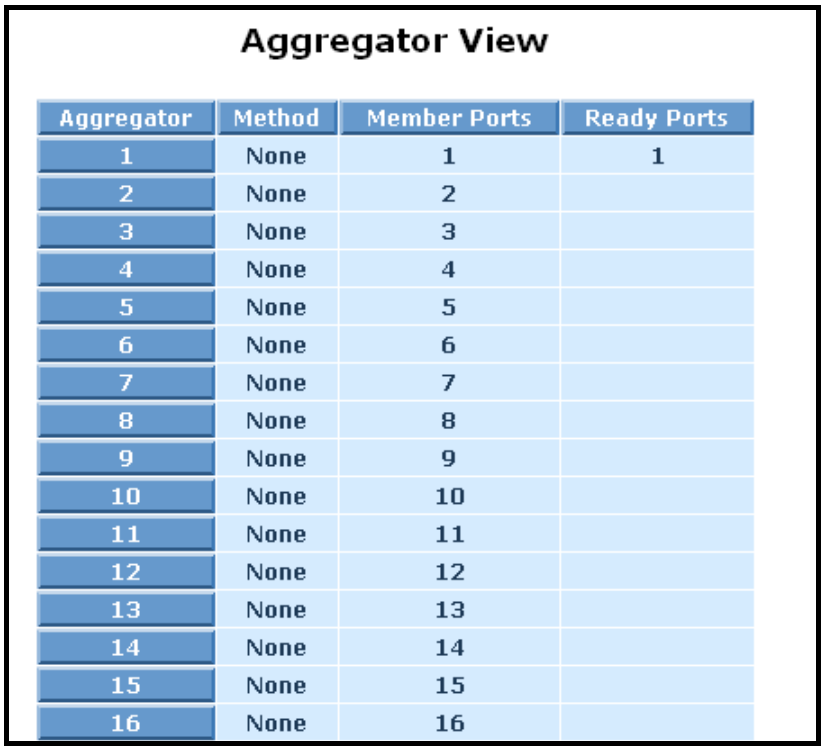

Aggregator View

Aggregator	Method	Member Ports	Ready Ports
1	None	1	1
2	None	2	
3	None	3	
4	None	4	
5	None	5	
6	None	6	
7	None	7	
8	None	8	
9	None	9	
10	None	10	
11	None	11	
12	None	12	
13	None	13	
14	None	14	
15	None	15	
16	None	16	

Parameter description:

Aggregator:

It shows the aggregator ID (from 1 to 24) of every port. In fact, every port is also an aggregator, and its own aggregator ID is the same as its own Port No.

Method:

Show the method a port uses to aggregate with other ports.

Member Ports:

Show all member ports of an aggregator (port).

Ready Ports:

Show only the ready member ports within an aggregator (port).

4.12.3 LACP system Priority

Function name:

LACP System Priority

Function description:

It is used to set the priority part of the LACP system ID. LACP will only aggregate

together the ports whose peer link partners are all on a single system. Each system supports LACP will be assigned a globally unique System Identifier for this purpose. A system ID is a 64-bit field comprising a 48-bit MAC Address and 16-bit priority value. The System Priority can be set by the user. Its range is from 1 to 65535. Default: 32768

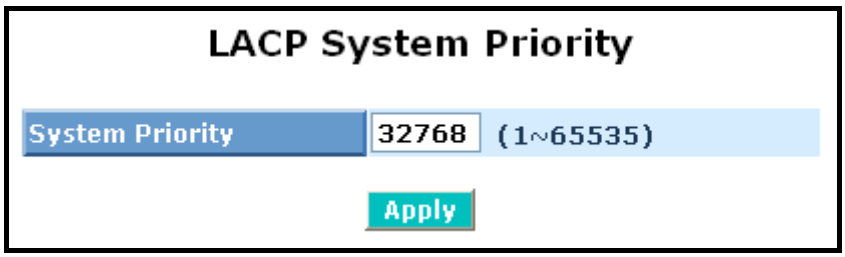

Parameter description:

System Priority:

Show the System Priority part of a system ID.(**1-65535**)

4.13 STP Configuration

The ***Spanning Tree Protocol (STP)*** is a standardized method **(IEEE 802.1D)** for avoiding loops in switched networks. When STP is enabled, ensure that only one path is active between any two nodes on the network at a time. User can enable Spanning Tree Protocol on switch's web management and then set up other advanced items. We recommend that you enable STP on all switches to ensure a single active path on the network.

4.13.1 STP Status

Function name:

STP Status

Function description:

In the Spanning Tree Status, user can read 12 parameters to know STP current status. The 12 parameters' description is listed in the following table.

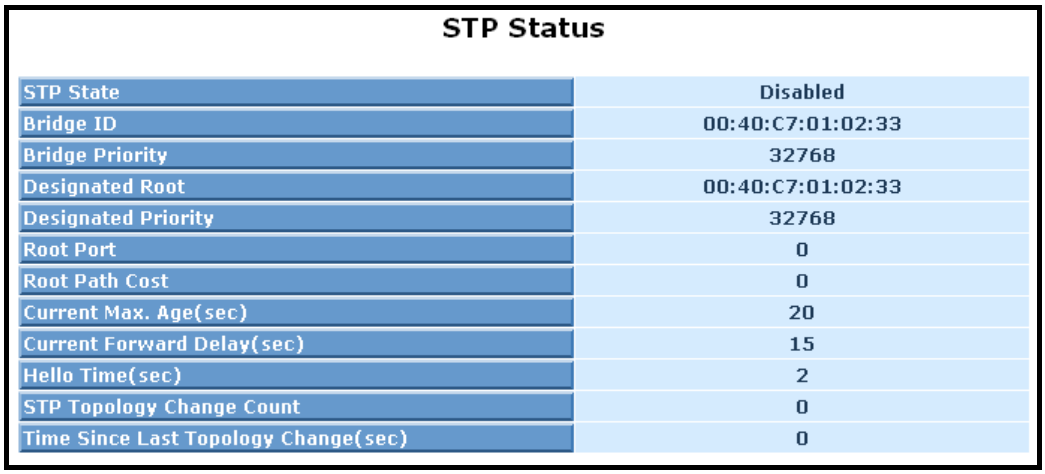

STP Status

STP State	Disabled
Bridge ID	00:40:C7:01:02:33
Bridge Priority	32768
Designated Root	00:40:C7:01:02:33
Designated Priority	32768
Root Port	0
Root Path Cost	0
Current Max. Age(sec)	20
Current Forward Delay(sec)	15
Hello Time(sec)	2
STP Topology Change Count	0
Time Since Last Topology Change(sec)	0

Parameter description:

STP State:

Show the current STP Enabled / Disabled status. ***Default is "Disabled"***.

Bridge ID:

Show switch's bridge ID which stands for the MAC address of this switch.

Bridge Priority:

Show this switch's current bridge priority setting. ***Default is 32768.***

Designated Root:

Show root bridge ID of this network segment. If this switch is a root bridge, the "Designated Root" will show this switch's bridge ID.

Designated Priority:

Show the current root bridge priority.

Root Port:

Show port number connected to root bridge with the lowest path cost.

Root Path Cost:

Show the path cost between the root port and the designated port of the root bridge.

Current Max. Age:

Show the current root bridge maximum age time. Maximum age time is used to monitor if STP topology needs to change. When a bridge does not receive a hello message from root bridge until the maximum age time is counted down to 0, the bridge will treat the root bridge malfunctioned and issue a Topology Change Notification (TCN) BPDU to all other bridges.

All bridges in the LAN will re-learn and determine which the root bridge is. Maximum Age time is assigned by root bridge in unit of seconds. ***Default is 20 seconds***.

Current Forward Delay:

Show the current root bridge forward delay time. The value of Forward Delay time is set by root. The Forward Delay time is defined as the time spent from Listening state moved to Learning state or from Learning state moved to Forwarding state of a port in bridge.

Hello Time:

Show the current hello time of the root bridge. Hello time is a time interval specified by root bridge, used to request all other bridges periodically sending hello message every “hello time” seconds to the bridge attached to its designated port.

STP Topology Change Count:

STP Topology Change Count expresses the time spent in unit of seconds since the beginning of the Spanning Tree Topology Change to the end of the STP convergence. Once the STP change is converged, the Topology Change count will be reset to 0. The figures showing in the screen may not be the exact time it spent but very close to, because the time is eclipsing.

Time Since Last Topology Change:

Time Since Last Topology Change is the accumulated time in unit of seconds the STP has been since the last STP Topology Change was made. When Topology Change is initiated again, this counter will be reset to 0. And it will also count again once STP topology Change is completed.

4.13.2 STP Configuration

The STP, Spanning Tree Protocol, actually includes RSTP. In the Spanning Tree Configuration, there are six parameters open for the user to configure as user’s idea. Each parameter description is listed below.

Function name:

STP Configuration

Function description:

User can set the following Spanning Tree parameters to control STP function enable/disable, select mode RSTP/STP and affect STP state machine behavior to send BPDU in this switch. The default setting of Spanning Tree Protocol is “**Disable**”.

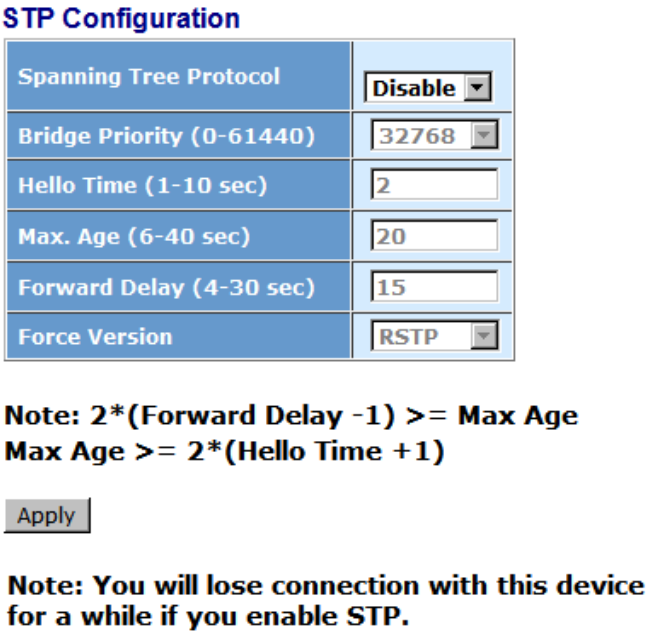

Parameter description:

Spanning Tree Protocol:

Set 802.1W Rapid STP function Enable / Disable. **Default is "Disable"**

Bridge Priority:

The lower the bridge priority is, the higher priority it has. Usually, the bridge with the highest bridge priority is the root. If you want to have the SNMP-24MGB as root bridge, you can set this value lower than that of bridge in the LAN. **The valid value is 0 ~ 61440. The default is 32768.**

Hello Time:

Hello Time is used to determine the periodic time to send normal BPDU from designated ports among bridges. It decides how long a bridge should send this message to other bridge to tell I am alive. When the SNMP-24MGB is the root bridge of the LAN, for example, all other bridges will use the hello time assigned by this switch to communicate with each other. The valid value is 1 ~ 10 in unit of second. **Default is 2 seconds.**

Max. Age:

When the SNMP-24MGB is the root bridge, the whole LAN will apply this figure set by this switch as their maximum age time. When a bridge received a BPDU originated from the root bridge and if the message age conveyed in the BPDU exceeds the Max. Age of the root bridge, the bridge will treat the root bridge malfunctioned and issue a Topology Change Notification (TCN) BPDU to all other bridges. All bridges in the LAN will re-calculate and determine who the root bridge is. **The valid value of Max. Age is 6 ~ 40 seconds. Default is 20 seconds.**

Forward Delay:

You can set the root bridge forward delay time. This figure is set by root bridge only. The forward delay time is defined as the time spent from Listening state moved to Learning state and also from Learning state moved to Forwarding state of a port in bridge. The forward delay time contains two states, Listening state to Learning state and Learning state to Forwarding state. It assumes that forward delay time is 15 seconds, and then total forward delay time will be 30 seconds. This has much to do with the STP convergent time which will be more than 30 seconds because some other factors. **The valid value is 4 ~ 30 seconds, default is 15 seconds.**

Force Version:

Two options are offered for the user's choosing STP algorithm. One is RSTP and the other is STP. If STP is chosen, RSTP will run as a legacy STP. The switch supports RSTP (802.1w) which is backward compatible with STP (802.1d).

4.13.3 STP Port Configuration

Function name:

STP Port Setting

Function description:

In the STP Port Setting, one item selection and five parameters settings are offered for user's setup. User can disable and enable each port by selecting each Port Status item. User also can set "Path Cost" and "Priority" of each port by filling in the desired value and set "Admin Edge Port" and "Admin Point To Point" by selecting the desired item.

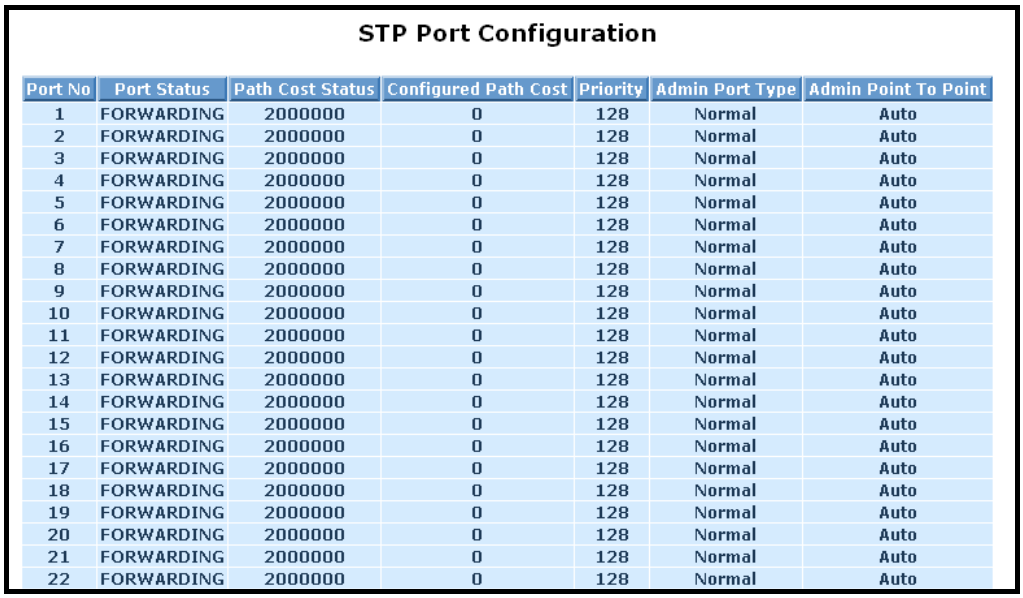

STP Port Configuration

Port No	Port Status	Path Cost Status	Configured Path Cost	Priority	Admin Port Type	Admin Point To Point
1	FORWARDING	2000000	0	128	Normal	Auto
2	FORWARDING	2000000	0	128	Normal	Auto
3	FORWARDING	2000000	0	128	Normal	Auto
4	FORWARDING	2000000	0	128	Normal	Auto
5	FORWARDING	2000000	0	128	Normal	Auto
6	FORWARDING	2000000	0	128	Normal	Auto
7	FORWARDING	2000000	0	128	Normal	Auto
8	FORWARDING	2000000	0	128	Normal	Auto
9	FORWARDING	2000000	0	128	Normal	Auto
10	FORWARDING	2000000	0	128	Normal	Auto
11	FORWARDING	2000000	0	128	Normal	Auto
12	FORWARDING	2000000	0	128	Normal	Auto
13	FORWARDING	2000000	0	128	Normal	Auto
14	FORWARDING	2000000	0	128	Normal	Auto
15	FORWARDING	2000000	0	128	Normal	Auto
16	FORWARDING	2000000	0	128	Normal	Auto
17	FORWARDING	2000000	0	128	Normal	Auto
18	FORWARDING	2000000	0	128	Normal	Auto
19	FORWARDING	2000000	0	128	Normal	Auto
20	FORWARDING	2000000	0	128	Normal	Auto
21	FORWARDING	2000000	0	128	Normal	Auto
22	FORWARDING	2000000	0	128	Normal	Auto

Parameter description:

Port Status:

It displays the current state of a port. We cannot manually set it because it displays the status only. There are three possible states. (According to 802.1w specification)

- ***DISCARDING state indicates that this port can neither forward packets nor contribute learning knowledge.***

Notice: Three other states ***(Disable state, BLOCKING state and LISTENING state)*** *defined in the 802.1d specification are now all represented as DISCARDING state.*

- ***LEARNING state indicates this port can now contribute its learning knowledge but cannot forward packets still.***
- ***FORWARDING state indicates this port can both contribute its learning knowledge and forward packets normally.***

Path Cost Status:

It is the contribution value of the path through this port to Root Bridge. STP algorithm determines a best path to Root Bridge by calculating the sum of path cost contributed by all ports on this path. A port with a smaller path cost value would become the Root Port more possibly.

Configured Path Cost:

The range is 0 – 200,000,000. In the switch, if path cost is set to be zero, the STP will get the recommended value resulted from auto-negotiation of the link accordingly and display this value in the field of Path Cost Status. Otherwise, it may show the value that the administrator set up in Configured Path Cost and

Path Cost Status.

802.1w RSTP recommended value: (Valid range: 1 – 200,000,000)

10 Mbps: 2,000,000; 100 Mbps: 200,000; 1 Gbps: 20,000

Default: 0

Priority:

Priority here means Port Priority. Port Priority and Port Number are mixed to form the Port ID. Port IDs are often compared in order to determine which port of a bridge would become the Root Port. The range is 0 – 240. **Default is 128.**

Admin Edge Port:

If user selects "Yes", this port will be an edge port. An Edge Port is a port connected to a device that knows nothing about STP or RSTP. Usually, the connected device is an end station. Edge Ports will immediately transit to forwarding state and skip the listening and learning state because the edge ports cannot create bridging loops in the network. This will expedite the convergence. When the link on the edge port toggles, the STP topology keeps unchanged. Unlike the designate port or root port though, an edge port will transit to a normal spanning-tree port immediately if it receives a BPDU. **Default: No**

Admin Point To Point:

We say a port is a point-to-point link, from RSTP's view, if it is in full-duplex mode but is shared link if it is in half-duplex mode. RSTP fast convergence can only happen on point-to-point links and on edge ports. This can expedite the convergence because this will have the port fast transited to forwarding state.

There are three parameters, Auto, True and False, used to configure the type of the point-to-point link. If configure this parameter to be Auto, it means RSTP will use the duplex mode resulted from the auto-negotiation. In today's switched networks, most links are running in full-duplex mode. For sure, the result may be half-duplex, in this case, the port will not fast transit to Forwarding state. If it is set as True, the port is treated as point-to-point link by RSTP and unconditionally transited to Forwarding state. If it is set as False, fast transition to Forwarding state will not happen on this port. **Default: Auto**

M Check:

Migration Check. It forces the port sending out an RSTP BPDU instead of a legacy STP BPDU at the next transmission. The only benefit of this operation is to make the port quickly get back to act as an RSTP port. Click <**M Check**> button to send a RSTP BPDU from the port you specified.

4.14 MSTP

The implementation of MSTP is according to IEEE 802.1Q 2005 Clause 13 – ***Multiple Spanning Tree Protocol. MSTP*** allows frames assigned to different VLANs to follow separate paths, each based on an independent Multiple Spanning Tree Instance (MSTI), within Multiple Spanning Tree (MST) Regions composed of LANs and or MST Bridges. Proper configuration of MSTP in an 802.1Q VLAN environment can ensure a loop-free data path for a group of vlans within an MSTI. Redundant path and load balancing in VLAN environment is also achieved via this feature. A spanning tree instance called ***CIST(Common and Internal Spanning Tree)*** always exists . **Up to 64 more spanning tree instances (MSTIs) can be provisioned.**

4.14.1 MSTP Status

Function name:

MSTP State

Function description:

To enable or disable MSTP. And to select a version of Spanning Tree protocol which MSTP should operate on.

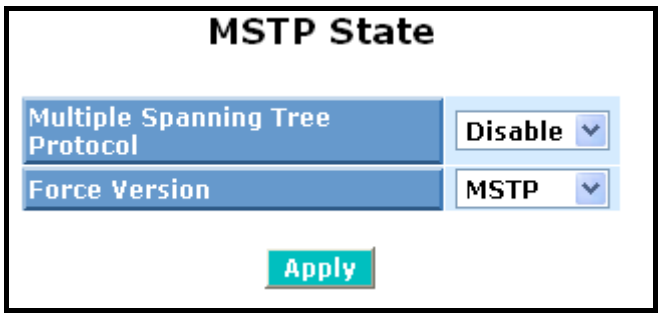

Parameter description:

Multiple Spanning Tree Protocol:

Disabled / Enabled

Force Version:

STP / RSTP / MSTP

4.14.2 MSTP Region Config

Function name:

MSTP Region Config

Function description:

To configure the basic identification of a MSTP bridge. Bridges participating in a common MST region must have the same Region Name and Revision Level.

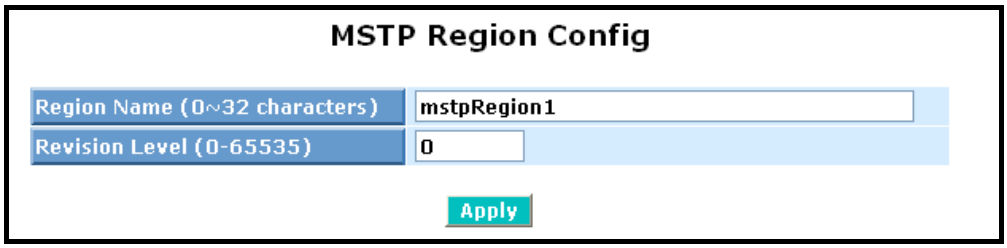

Parameter description:

Region Name:

0-32 characters.(A variable length text string encoded within a fixed field of 32 octets , conforming to RFC 2271's definition of SnmpAdminString.)

Revision Level:

0-65535

4.14.3 Instant View

Function name:

MSTP Instance Config

Function description:

Providing an MST instance table which include information (vlan membership of a MSTI) of all spanning instances provisioned in the particular MST region which the bridge belongs to. Through this table, additional MSTP configuration data can be applied and MSTP status can be retrieved.

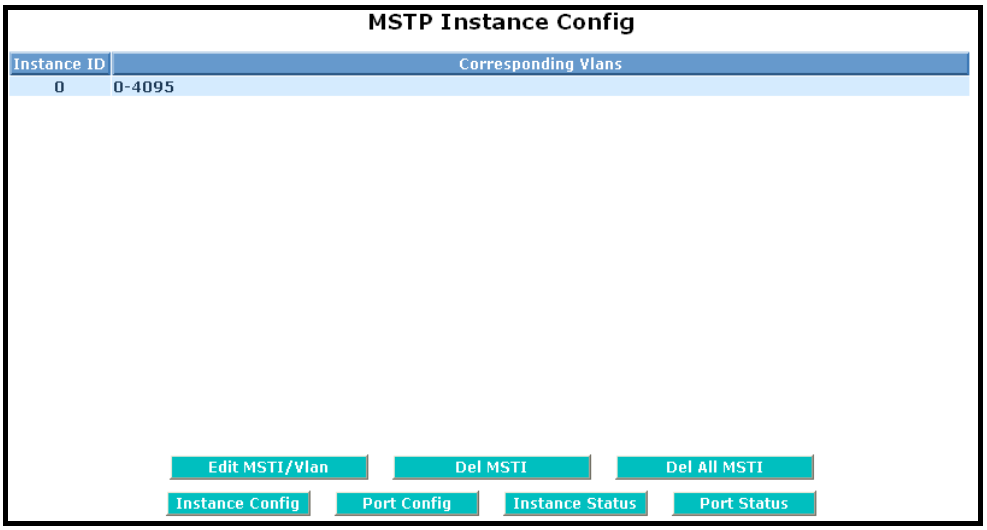

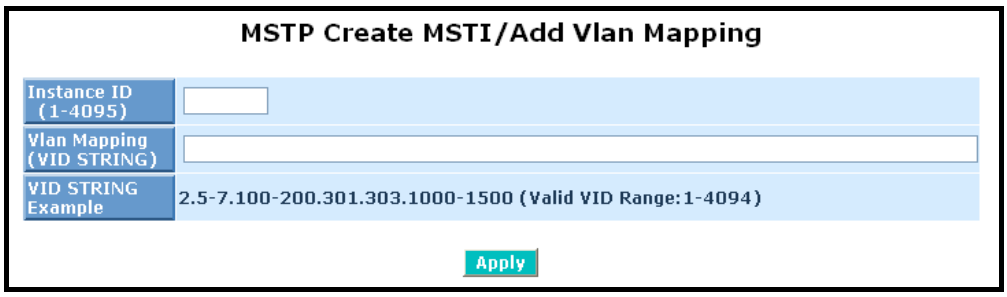

Parameter description:

Instance ID:

Every spanning tree instance need to have a unique instance ID within 0~4095. Instance 0 (CIST) always exists and can not be deleted. Additional spanning instances (MSTIs) can be added or deleted. At least one vlan must be provisioned for an MSTI to declare the need for the MSTI to be existent.

Corresponding Vlans: (0-4095)

Multiple vlans can belong to an MSTI. All vlans that are not provisioned through this will be automatically assigned to Instance 0(CIST).

Edit MSTI / Vlan: Fig. 3-156

To add an MSTI and provide its vlan members or modify vlan members for a specific MSTI.

Del MSTI:

To delete an MSTI.

Del All MSTI:

Deleting all provisioned MSTIs at a time.

Instance Configuration: Fig. 3-157

To provision spanning tree performance parameters per instance.

Port Config: Fig. 3-158

To provision spanning tree performance parameters per instance per port.

Instance Status: Fig. 3-159

To show the status report of a particular spanning tree instance.

Port Status: Fig. 3-160

To show the status report of all ports regarding a specific spanning tree instance.

Parameter description:

Vlan Mapping:

VID STRING

VID STRING Example:

2.5-7.100-200.301.303.1000-1500 (Valid VID Range:1-4094)

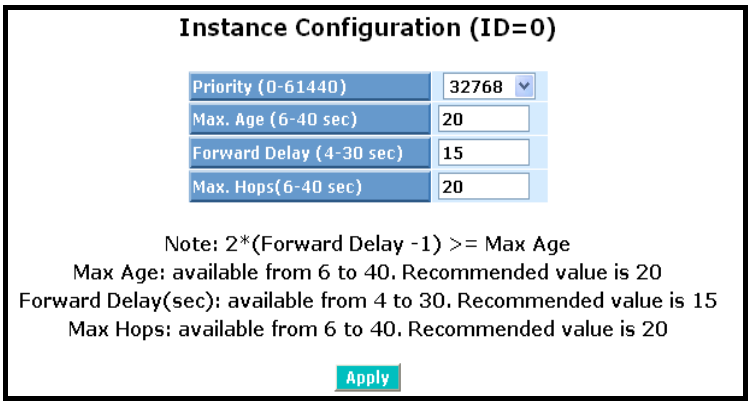
Instance Configuration (ID=0)
Priority (0-61440)
32768
Max. Age (6-40 sec)
20
Forward Delay (4-30 sec)
15
Max. Hops(6-40 sec)
20
Note: 2*(Forward Delay -1) >= Max Age
Max Age: available from 6 to 40. Recommended value is 20
Forward Delay(sec): available from 4 to 30. Recommended value is 15
Max Hops: available from 6 to 40. Recommended value is 20
Apply

Parameter description:

Priority: The priority parameter used in the CIST(Common and Internal Spanning Tree) connection.

0 / 4096 / 8192 / 12288 / 16384 / 20480 / 24576 / 28672 / 32768 / 36864 / 40960 / 45056 / 49152 / 53248 / 57344 / 61440

MAX. Age:

6-40sec. The same definition as in the RSTP protocol.

Forward Delay:

4-30sec. The same definition as in the RSTP protocol.

MAX. Hops:

6-40sec. It's a new parameter for the multiple spanning tree protocol. It is used in the internal spanning tree instances. "CIST Remaining Hops" or "MSTI Remaining Hops" in the Spanning tree protocol message would decreased by one when the message is propagated to the neighboring bridge. If the Remaining Hops in a message is zero, the message (BPDU) would be regarded as invalid. Max Hops is used to specify the initial value of the Remaining Hops for *Regional Root Bridge (Either CIST Regional Root or MSTI Regional Root)*

Port Config of Instance 0

Port Config								Migration Check
Port	Path Cost	Priority	Hello Time	Admin Edge	Admin P2P	Restricted Role	Restricted TCN	Mcheck
1	0	128	2	Yes	Auto	No	No	---
2	0	128	2	Yes	Auto	No	No	---
3	0	128	2	Yes	Auto	No	No	---
4	0	128	2	Yes	Auto	No	No	---
5	0	128	2	Yes	Auto	No	No	---
6	0	128	2	Yes	Auto	No	No	---
7	0	128	2	Yes	Auto	No	No	---
8	0	128	2	Yes	Auto	No	No	---
9	0	128	2	Yes	Auto	No	No	---
10	0	128	2	Yes	Auto	No	No	---
11	0	128	2	Yes	Auto	No	No	---
12	0	128	2	Yes	Auto	No	No	---

Parameter description:

Port:

1-24

Path Cost:

1 – 200,000,000

The same definition as in the RSTP specification. But in MSTP, this parameter can be respectively applied to ports of CIST and ports of any MSTI.

Priority:

0 / 16 / 32 / 48 / 64 / 80 / 96 / 112 / 128 / 144 / 160 / 176 / 192 / 208 / 224 / 240

The same definition as in the RSTP specification. But in MSTP, this parameter can be respectively applied to ports of CIST and ports of any MSTI.

Hello Time: (1 / 2)

In contrast with RSTP, Hello Time in MSTP is a per port setting for the CIST.

Admin Edge: (Yes / No)

The same definition as in the RSTP specification for the CIST ports.

Admin P2P: (Auto/ True/ False)

The same definition as in the RSTP specification for the CIST ports.

Restricted Role: (Yes/ No)

If “Yes” causes the Port not to be selected as Root Port for the CIST or any MSTI, even it has the best spanning tree priority vector. Such a Port will be selected as an Alternate Port after the Root Port has been selected. This parameter is “No” by default. If set, it can cause lack of spanning tree connectivity. It is set by a network administrator to prevent bridges external to a core region of the network influencing the spanning tree active topology, possibly because those bridges are not under the full control of the administrator.

Restricted TCN: (Yes/ No)

If “Yes” causes the Port not to propagate received topology change notifications and topology changes to other Ports. This parameter is “No” by default. If set it can cause temporary loss of connectivity after changes in a spanning trees active topology as a result of persistent incorrectly learned station location information. It is set by a network administrator to prevent bridges external to a core region of the network, causing address flushing in that region, possibly because those bridges are not under the full control of the administrator. or the status of MAC operation for the attached LANs transitions frequently.

Mcheck:

The same definition as in the RSTP specification for the CIST ports.

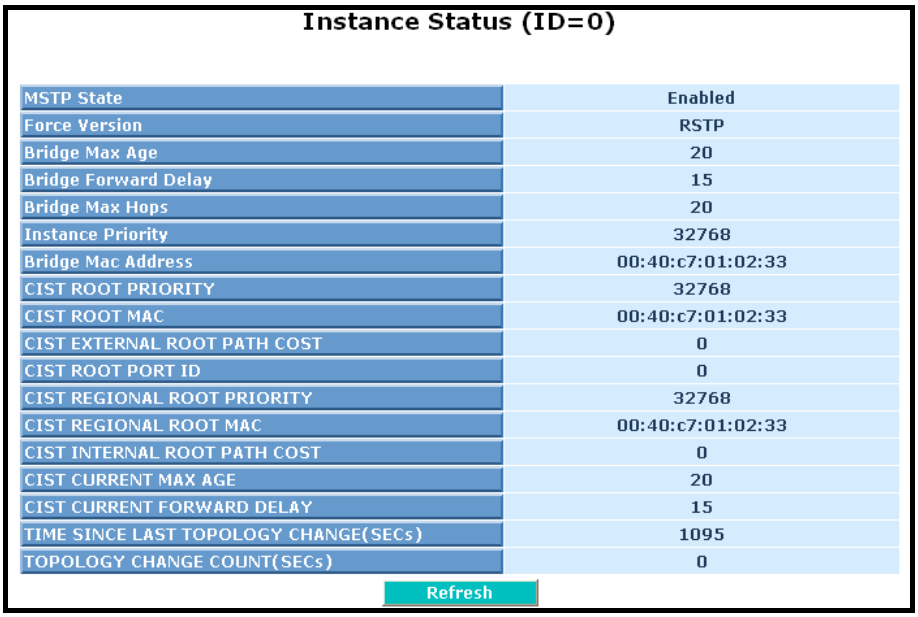

Parameter description:

MSTP State:

MSTP protocol is Enable or Disable.

Force Version:

It shows the current spanning tree protocol version configured.

Bridge Max Age:

It shows the Max Age setting of the bridge itself.

Bridge Forward Delay:

It shows the Forward Delay setting of the bridge itself.

Bridge Max Hops:

It shows the Max Hops setting of the bridge itself.

Instance Priority:

Spanning tree priority value for a specific tree instance (CIST or MSTI)

Bridge Mac Address:

The Mac Address of the bridge itself.

CIST ROOT PRIORITY:

Spanning tree priority value of the CIST root bridge

CIST ROOT MAC:

Mac Address of the CIST root bridge

CIST EXTERNAL ROOT PATH COST:

Root path cost value from the point of view of the bridge's MST region.

CIST ROOT PORT ID:

The port ID of the bridge's root port. In MSTP, peer port of a root port may reside in different MST region or in the same MST region. The first case indicates that the root port's owner is the CIST regional root bridge.

CIST REGIONAL ROOT PRIORITY:

Spanning tree priority value of the CIST regional root bridge.Note that CIST Regional Root bridge is different from CIST Root bridge.One exception is that when a bridge belonging to an MST region happens to be the root bridge of the CST (Common Spanning Tree). An MST Region in the CST can be regarded as a common RSTP bridge.The IST (Internal Spanning Tree) and MSTIs are transparent to bridges outside this region.

CIST REGIONAL ROOT MAC:

Mac Address of the CIST regional root bridge.

CIST INTERNAL ROOT PATH COST:

Root path cost value from the point of view of the bridges inside the IST.

CIST CURRENT MAX AGE:

Max Age of the CIST Root bridge.

CIST CURRENT FORWARD DELAY:

Forward Delay of the CIST Root bridge.

TIME SINCE LAST TOPOLOGY CHANGE(SECs):

Time Since Last Topology Change is the elapsed time in unit of seconds for a bunch of "Topology Change and(or) Topology Change Notification receiving" to occur. When new series of Topology Changes occur again, this counter will be reset to 0.

TOPOLOGY CHANGE COUNT(SECs):

The per spanning tree instanceTopology Change Count expresses the time spent in unit of seconds since the beginning of the Spanning Tree Topology Change to the end of the STP convergence. Once there is no topology change occurring and no more topology change notification received, the Topology Change count will be reset to 0.

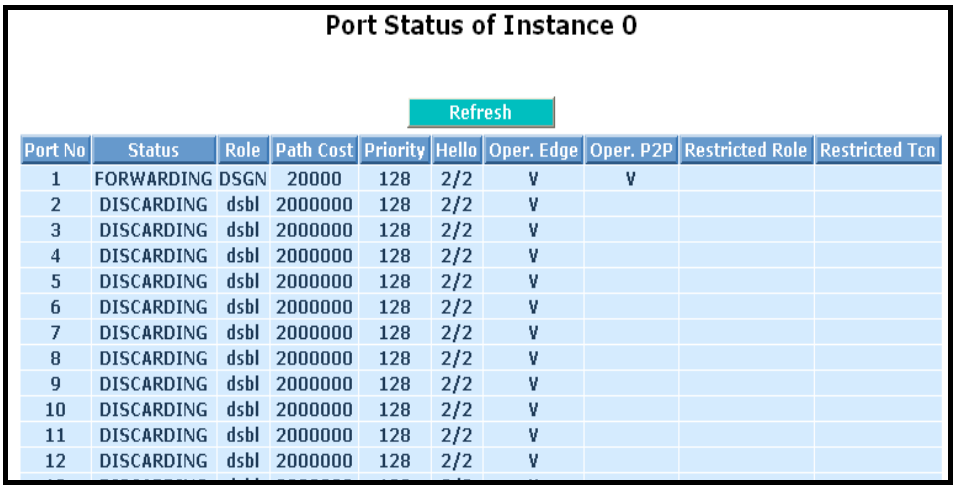

Port Status of Instance 0

Refresh

Port No	Status	Role	Path Cost	Priority	Hello	Oper. Edge	Oper. P2P	Restricted Role	Restricted Tcn
1	FORWARDING	DSGN	20000	128	2/2	V	V		
2	DISCARDING	dsbl	2000000	128	2/2	V			
3	DISCARDING	dsbl	2000000	128	2/2	V			
4	DISCARDING	dsbl	2000000	128	2/2	V			
5	DISCARDING	dsbl	2000000	128	2/2	V			
6	DISCARDING	dsbl	2000000	128	2/2	V			
7	DISCARDING	dsbl	2000000	128	2/2	V			
8	DISCARDING	dsbl	2000000	128	2/2	V			
9	DISCARDING	dsbl	2000000	128	2/2	V			
10	DISCARDING	dsbl	2000000	128	2/2	V			
11	DISCARDING	dsbl	2000000	128	2/2	V			
12	DISCARDING	dsbl	2000000	128	2/2	V			

Parameter description:

Port No:

1-24

Status:

The forwarding status.Same definition as of the RSTP specification. Possible values are *"FORWARDING", "LEARNING", "DISCARDING"*

Status:

The role that a port plays in the spanning tree topology. Possible values are

“dsbl”(disable port), ”alt”(alternate port), “bkup”(backup port), “ROOT”(root port) , “DSGN”(designated port), “MSTR”(master port). The last 3 are possible port roles for a port to transit to FORWARDING state

Path Cost:

Display currently resolved port path cost value for each port in a particular spanning tree instance.

Priority:

Display port priority value for each port in a particular spanning tree instance.

Hello:

per port Hello Time display. It takes the following form:

Current Hello Time/Hello Time Setting

Oper. Edge:

Whether or not a port is an Edge Port in reality.

Oper. P2P:

Whether or not a port is a Point-to-Point Port in reality.

Restricted Role:

Same as mentioned in “Port Config”

Restricted Tcn:

Same as mentioned in “Port Config”

4.15 Mirror

Function name:

Mirror Configuration

Function description:

Mirror Configuration is to monitor the traffic of the network. For example, we assume that Port A and Port B are Monitoring Port and Monitored Port respectively, thus, the traffic received by Port B will be copied to Port A for monitoring.

Note:

When configuring the mirror function, you should avoid setting a port to be a sniffer port and aggregated port at the same time. It will cause something wrong.

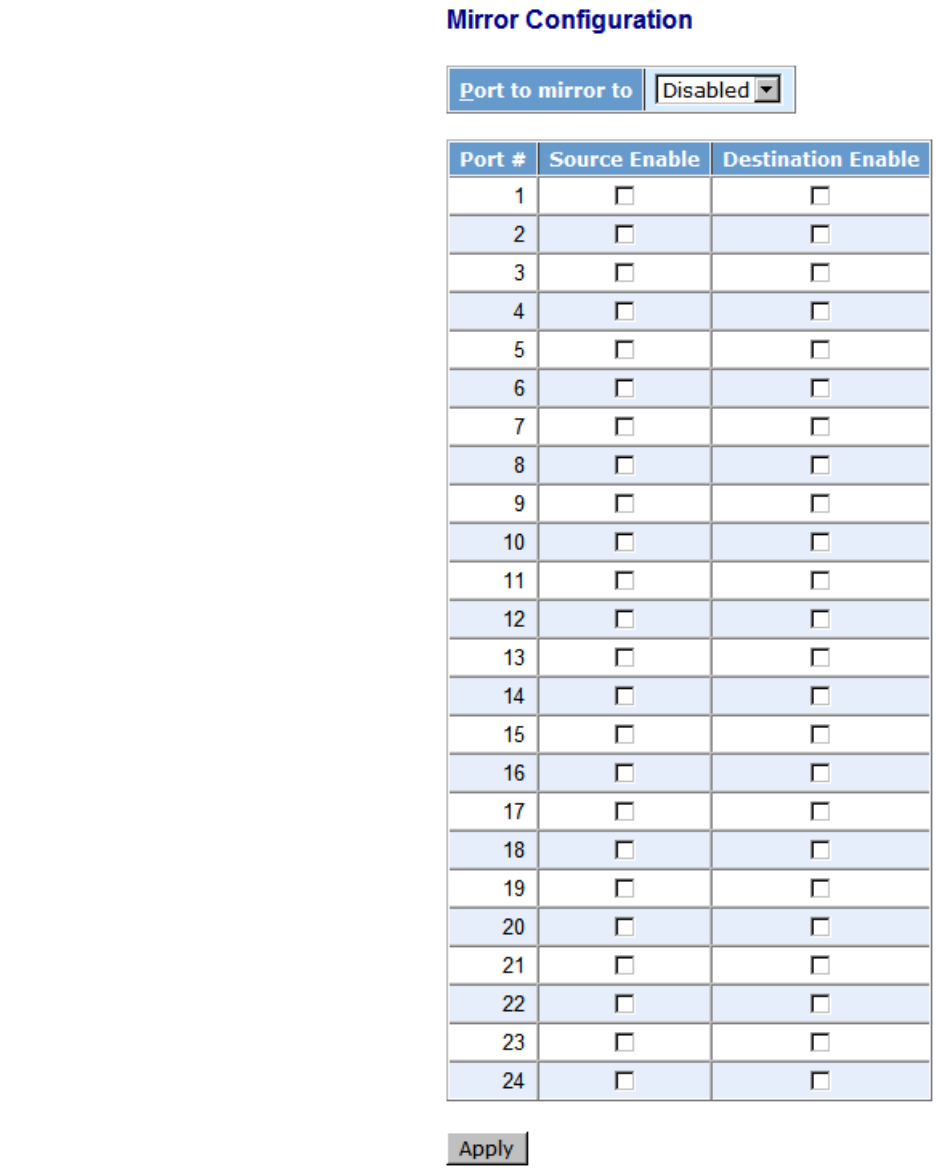

Parameter description:

Port to mirror to:

Range: Disabled / Port 1-24

Set the monitoring port.

Port #:

Range: 1-24

Select the monitored ports.

Source Enable:

The source enable means the monitored port ingress traffic will be copied to monitoring port.

Destination Enable:

The destination enable means the monitored port egress traffic will be copied to monitoring port.

4.16 Multicast

The function, Multicast, is used to establish the multicast groups to forward the multicast packet to the member ports, and, in nature, avoids wasting the bandwidth while IP multicast packets are running over the network. This is because a switch that does not support IGMP or IGMP Snooping can not tell the multicast packet from the broadcast packet, so it can only treat them all as the broadcast packet. Without IGMP Snooping, the multicast packet forwarding function is plain and nothing is different from broadcast packet.

A switch supported IGMP Snooping with the functions of query, report and leave, a type of packet exchanged between IP Multicast Router/Switch and IP Multicast Host, can update the information of the Multicast table when a member (port) joins or leaves an IP Multicast Destination Address. With this function, once a switch receives an IP multicast packet, it will forward the packet to the members who joined in a specified IP multicast group before.

The packets will be discarded by the IGMP Snooping if the user transmits multicast packets to the multicast group that had not been built up in advance.

4.16.1 IGMP Mode

Function name:

IGMP Mode

Function description:

IGMP mode to select the switch to issue IGMP host messages on behalf of hosts that the system discovered through standard IGMP interfaces. The switch acts as a *proxy or snooping* for its hosts.

Parameter description:

Disable:

To disable the IGMP service on the switch.

Proxy :

To select and enable the IGMP mode with a proxy on the switch.

Snooping:

To select and enable the IGMP mode with a snooping on the switch.

4.16.2 IGMP Proxy

Function name:

IGMP Proxy Configuration

Function description:

IGMP proxy enables the switch to issue IGMP host messages on behalf of hosts that the system discovered through standard IGMP interfaces. The switch acts as a *proxy* for its hosts.

You enable IGMP proxy on the switch, which connects to a router closer to the root of the tree. This interface is the *upstream interface*. The router on the upstream interface should be running IGMP.

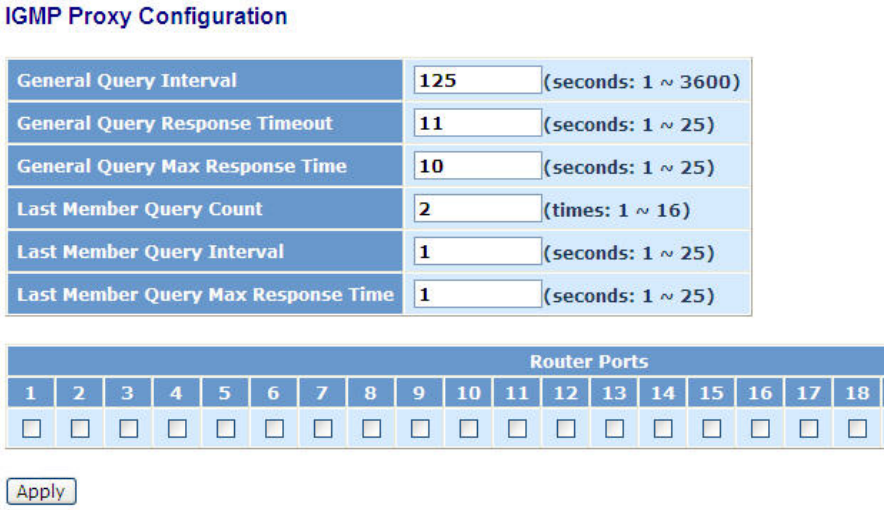

Parameter description:

General Query Interval :

The general query interval is the amount of time in seconds between IGMP General Query messages sent by the router (if the router is the querier on this subnet). Available value: 1-3600 sec

General Query Response Timeout :

The General Query Response Timeout field is the amount of time in seconds. Available value: 1-25 sec

General Query Max Response Time :

The Maximum Response Time field is only used in general or group-specific query messages. The Maximum Response Time is configured as the value for the Query response interval setting. Available value: 1-25 sec

Last Member Query Count :

To set last member Query Count on Switch. Available value: 1-16 times

Last Member Query Interval :

The last member query interval is the amount of time in seconds between IGMP last member Query messages sent by the router (if the router is the querier on this subnet). Available value: 1-25 sec

Last Member Query Max Response Time :

To set the last member Query Response Time field is used in specific or group-specific query messages. The last member query Maximum Response Time is configured as the value. Available value: 1-25 sec

4.16.3 IGMP Snooping

Function name:

Snooping

Function description:

IGMP snooping provide the switch to issue to prevent hosts on a local network from receiving traffic for a multicast group they have not explicitly joined. It provides switches with a mechanism to prune multicast traffic from links that do not contain a multicast listener (IGMP client). A switch that does not IGMP snoop will, by default, 'flood' multicast traffic to all the ports in a broadcast domain (or the VLAN equivalent). Multicast can cause unnecessary or even crippling load on host devices by requiring them to process packets they have not solicited.

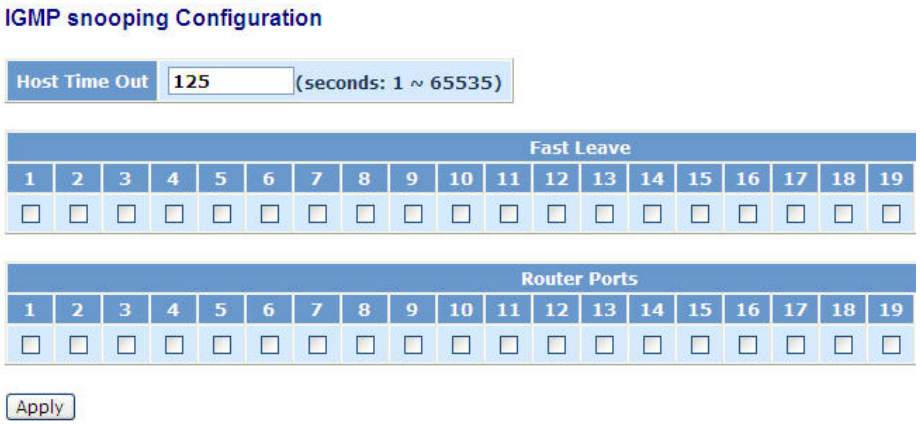
IGMP snooping Configuration
Host Time Out
125
(seconds: 1 ~ 65535)
Fast Leave
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
Router Ports
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
Apply

Parameter description:

Host Time Out:

The IGMP Snooping Host query Timeout field is the amount of time in seconds.

Available value: 1-65535 sec

Fast Leave :

To evoke the port to become a Fast leave port in IGMP snooping service.

Router ports:

To evoke the port to become a Router port in IGMP snooping service.

Apply:

To save the configuration to switch memory.

4.16.4 IGMP Membership

Function name:

Group Membership

Function description:

To show the IGMP group members information, the you can edit the parameters for IGMP groups and members in the web user interface.

Parameter description:

Index:

To display the IGMP group membership index information.

Group Address:

The switch supports managed valid IGMP Group membership IP Address range, It will show effective IP range. ***The valid range is 224.0.0.0~239.255.255.255.***

VLAN ID:

The switch supports two kinds of options for managed valid VLAN VID, including “Any” and “Custom”. Default is “Any”. When you choose “Custom”, you can fill in VID number. ***The valid VID range is 1~4094.***

Port:

The switch supports two kinds of options for managed valid port range, including “Any” and “Custom”. Default is “Any”. You can select the ports that you would like them to be worked and restricted in the allowed group configuration if ”Custom” had been chosen.

Previous Page:

To show previous page.

Next Page:

To show next page.

Refresh:

To refresh the IGMP Group membership information which caught by the switch.

4.16.5 MVR

Function name:

MVR Setting

Function description:

Multicast VLAN Registration (MVR) routes packets received in a multicast source VLAN to one or more receive VLANs. Clients are in the receive VLANs and the multicast server is in the source VLAN. Multicast routing has to be disabled when MVR is enabled. Refer to the configuration guide at Understanding Multicast VLAN Registration for more information on MVR.

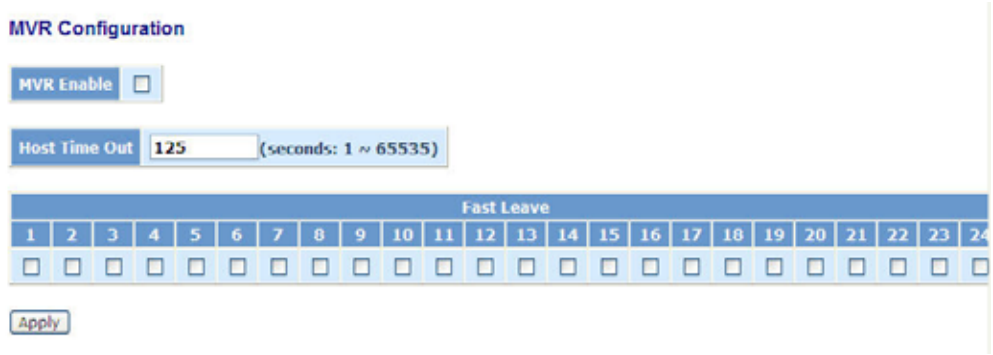
MVR Configuration
MVR Enable
Host Time Out
125
(seconds: 1 ~ 65535)
Fast Leave
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
Apply

Parameter description:

MVR Enable:

To Set the multicast VLAN registration function enable.

Host Time Out:

The MVR Host query Timeout field is the amount of time in seconds.

Available value: 1-65535 sec

Fast Leave :

To evoke the port to become a Fast leave port in MVR (Multicast VLAN Registration) service on the switch.

4.16.6 MVID

Function name:

MVID Configuration

Function description:

To create the Multicast VLAN Registration member and evoke the port with which mode as client or router.

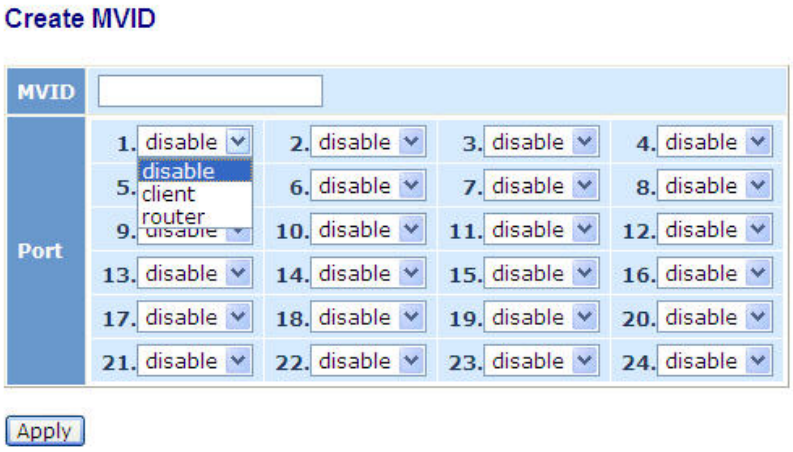

Parameter description:

MVID:

The switch supports two kinds of options for managed valid VLAN VID, including "Client" and "router". Default is "Disable". When you choose "Client", you can fill in MVID number. **The valid VID range is 1~4094.**

Port:

The switch supports two kinds of options for managed valid port range, including "Client" and "router". Default is "Disable". You can select the ports that you would like them to be worked and restricted in the allowed group configuration if "client" had been chosen.

4.16.7 Group Allow

Function name:

Group Allow

Function description:

The Group Allow function allows the IGMP Snooping to set up the IP multicast table based on user's specific conditions. IGMP report packets that meet the items you set up will be joined or formed the multicast group.

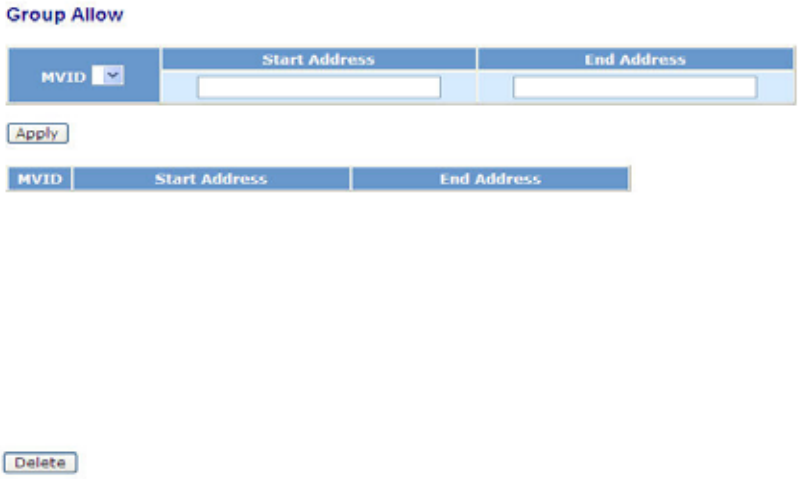

Parameter description:

MVID:

The switch supports two kinds of options for managed valid VLAN VID, including "Client" and "router". Default is "disable". When you choose "Custom", you can fill in VID number. **The valid VID range is 1~4094**.

IP Range (Start Address to End Address):

The switch supports two kinds of options for managed valid IP range, you can assigned effective IP range. **The valid range is 224.0.0.0~239.255.255.255**.

Add:

A new entry of allowed group configuration can be created after the parameters as mentioned above had been setup and then press **<Add>** button.

Edit:

The existed entry also can be modified after pressing **<Edit>** button.

Delete:

Remove the existed entry of allowed group configuration from the allowed group.

4.16.8 MVR Group Membership

Function name:

MVR Group Membership

Function description:

To show the MVR IGMP group members information, the you can edit the parameters

for IGMP groups and members in the web user interface.

Parameter description:

Index:

To display the MVR group membership index information.

Group Address:

The switch supports managed valid MVR Group membership IP Address range, It will show effective IP range. ***The valid range is 224.0.0.0~239.255.255.255.***

MVID:

The switch supports two kinds of options for managed valid MVID, you can fill in VID number. ***The valid VID range is 1~4094.***

Port:

The switch supports two kinds of options for managed valid port range, including “Any” and “Custom”. Default is “Any”. You can select the ports that you would like them to be worked and restricted in the allowed group configuration if ”Custom” had been chosen.

Previous Page:

To show previous page.

Next Page:

To show next page.

Refresh:

To refresh the IGMP Group membership information which caught by the Switch.

4.17 Alarm Configuration

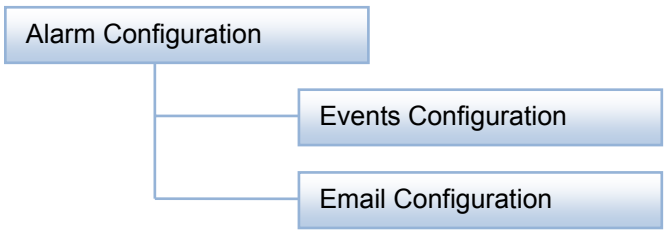

Function name:

Events Configuration

Function description:

The Trap Events Configuration function is used to enable the switch to send out the trap information while pre-defined trap events occurred. The switch offers 24 different trap events to users for switch management. The trap information can be sent out in two ways, including email and trap. The message will be sent while users tick (☑) the trap event individually on the web page shown as below.

Parameter description:

Trap: Cold Start, Warm Start, Link Down, Link Up, Authentication Failure, User login, User logout

STP: STP Topology Changed, STP Disabled, STP Enabled

LACP: LACP Disabled, LACP Enabled, LACP Member Added, LACP Port Failure

GVRP: GVRP Disabled, GVRP Enabled

VLAN: VLAN Disabled, Port-based VLAN Enabled, Tag-based VLAN Enabled, Metro-mode Vlan Enabled, Double-tag Vlan Enabled

Module Swap: Module Inserted, Module Removed, Dual Media Swapped

4.17.1 Event

Function name:

Email Configuration

Function description:

Alarm configuration is used to configure the persons who should receive the alarm message via either email. It depends on your settings. An email address has to be set in the web page of alarm configuration. Then, user can read the trap information from the email. This function provides 6 email addresses at most. The 24 different trap events will be sent out to SNMP Manager when trap event occurs. After ticking trap events, you can fill in your desired email addresses. Then, please click <**Apply**> button to complete the alarm configuration. It will take effect in a few seconds.

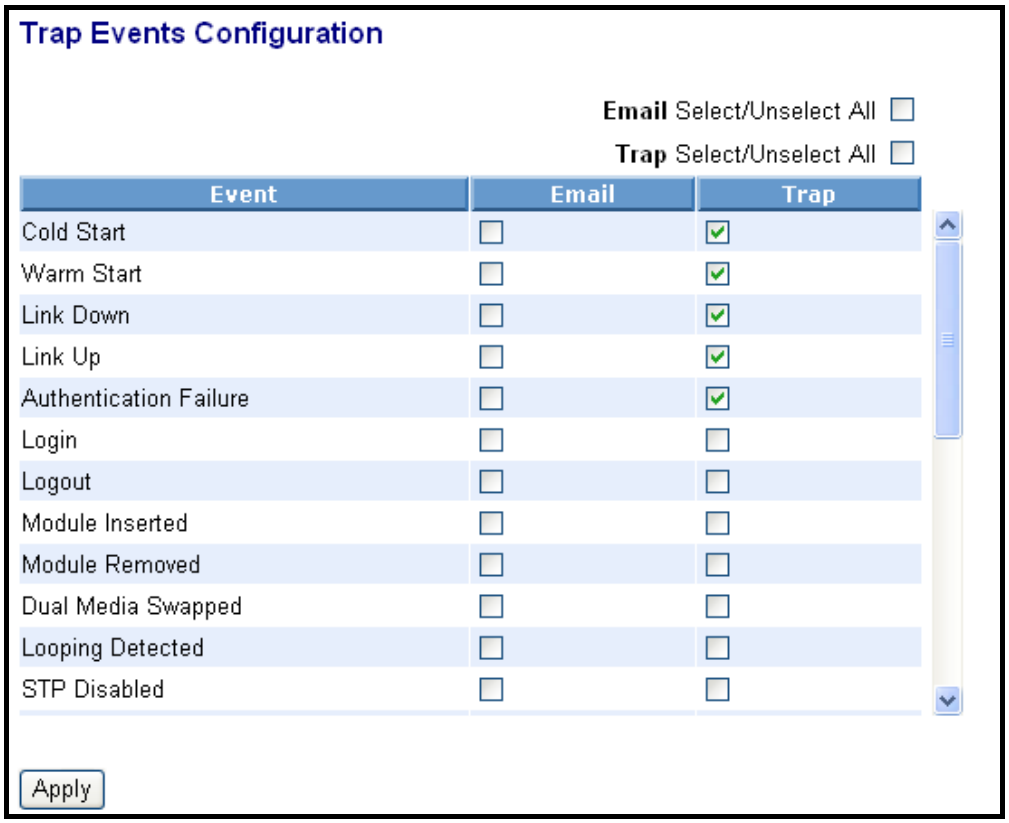

4.17.2 Email

Parameter description:

Email:

Mail Server: the IP address of the server transferring your email.

Username: your username on the mail server.

Password: your password on the mail server.

Email Address 1 – 6: email address that would like to receive the alarm message.

Alarm Configuration

Mail Server	
User Name	
Password	
Sender	
Return Path	
Email Adress 1	
Email Adress 2	
Email Adress 3	
Email Adress 4	
Email Adress 5	
Email Adress 6	

Apply

4.18 DHCP Snooping

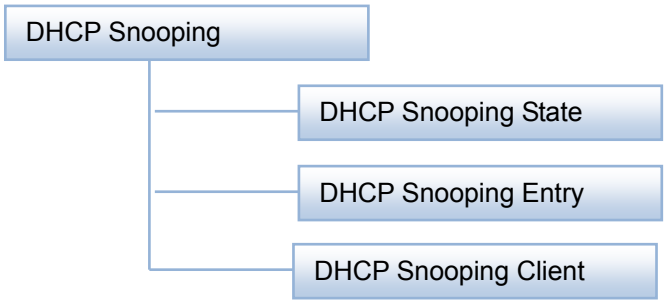

4.18.1 DHCP Snooping State

Function name:

DHCP Snooping State

Function description:

The addresses assigned to DHCP clients on unsecure ports can be carefully controlled using the dynamic bindings registered with DHCP Snooping. DHCP snooping allows a switch to protect a network from rogue DHCP servers or other devices which send port-related information to a DHCP server. This information can be useful in tracking an IP address back to a physical port.

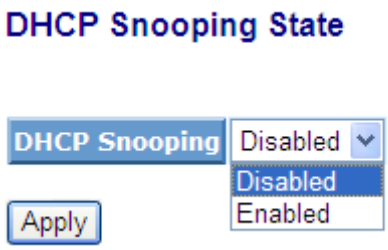

Parameter description:

DHCP Snooping state: The parameter which set to disabled or enabled the DHCP snooping function on the switch, the default is **Disabled.**

Note: *To click* <**Apply**> *when you finish the configuration.*

4.18.2 DHCP Snooping Entry

Function name:

DHCP Snooping Entry

Function description:

DHCP snooping Entry allows a switch to add the a trust DHCP server and 2 trust port to build the DHCP snooping available entry. This information can be useful in tracking an IP address back to a physical port and enable or disable the DHCP Option 82.

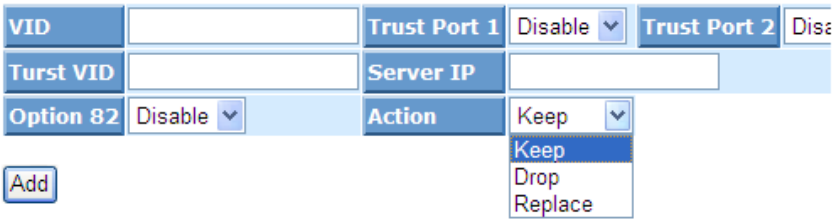

Parameter description:

VID: When DHCP snooping is enabled, and enabled on the specified VLAN, DHCP packet filtering will be performed on any un-trusted ports within the VLAN. It set a available VLAN ID to enable the DHCP snooping on VLAN interface.

Trust Port 1: If DHCP snooping is enabled globally, and also enabled on the VLAN where the DHCP packet is received, all DHCP packets are forwarded for a trusted por. It set a trust port 1 available port from 0 to 24. 0 is disabled.

Trust port 2: It set a trust port 2 available port from 0 to 24. 0 is disabled.

Trust VID: It set a trust VLAN ID available VID from 1 to 4094.

Server IP: It set a trust DHCP Server IP address for DHCP Snooping.

Option 82: It set the DHCP Option 82 function on the switch, **default is Disable**.

Action: It set the switch when received a client DHCP request packet then action for filtering available action : keep/ drop / replace.

Note: Filtering rules are implemented as follows:

- If the DHCP snooping is disabled, all DHCP packets are forwarded.
- If DHCP snooping is enabled and also enabled on the VLAN where the DHCP packet is received, all DHCP packets are forwarded for a trusted port.
- If DHCP snooping is enabled and also enabled on the VLAN where the DHCP packet is received, but the port is not trusted, it is processed as follows:
  - If the DHCP packet is a reply packet from a DHCP server, the packet is dropped.
  - If the DHCP packet is from a client, such as a DISCOVER, REQUEST INFORM, DECLINE or RELEASE message, the packet is forwarded if MAC address verification is disabled. However, if MAC address verification is enabled, then the packet will only be forwarded if the client's hardware address stored in the DHCP packet is the same as the source MAC address in the Ethernet header.
  - If the DHCP packet is not a recognizable type, it is dropped.
- If a DHCP packet from a client passes the filtering criteria above, it will only be forwarded to trusted ports in the same VLAN.
- If a DHCP packet is from server is received on a trusted port, it will be forwarded to both trusted and un-trusted ports in the same VLAN.

4.18.3 DHCP Snooping Client

Function name:

DHCP Snooping Client

Function description:

To show the DHCP snooping client.

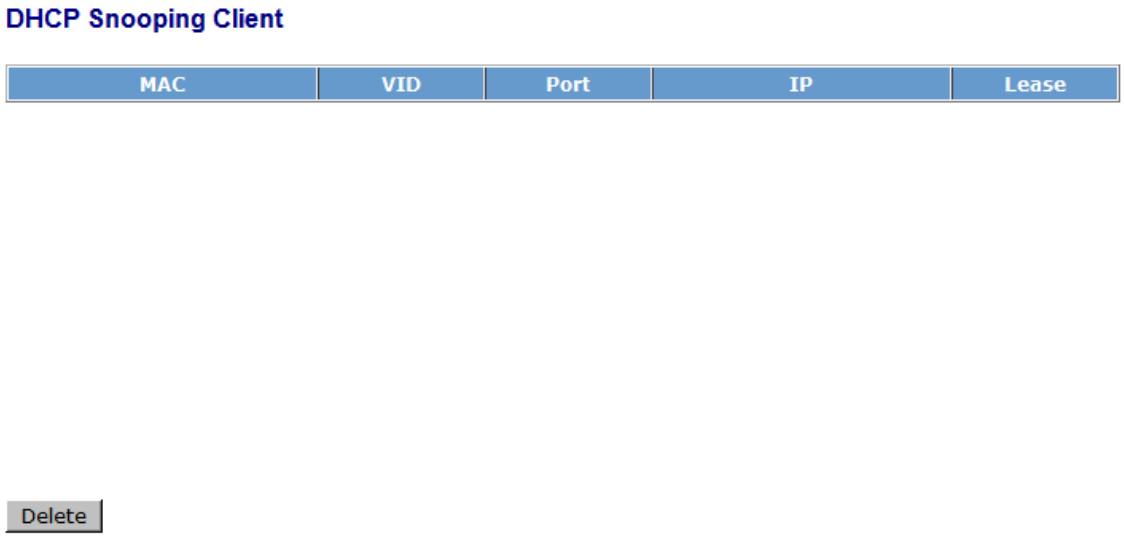

Parameter description:

MAC: To show the DHCP snooping client's MAC address.

VID: To show the DHCP snooping client's VLAN ID.

Port: To show the DHCP snooping client's port.

IP: To show the DHCP snooping client's IP address.

Lease: To show the DHCP snooping client's lease.

4.19 Save / Store

The switch supports three copies of configuration, including the default configuration, working configuration and user configuration for your configuration management. All of them are listed and described below respectively.

- **Default Configuration:**

This is ex-factory setting and cannot be altered. In Web UI, two restore default functions are offered for the user to restore to the default setting of the switch. One is the function of *"Restore Default Configuration included default IP address"*, the IP address will restore to default "192.168.1.1" as you use it. The other is the function of *"Restore Default Configuration without changing current IP address"*, the IP address will keep the same one that you had saved before by performing this function.

▪ **Working Configuration:**

It is the configuration you are using currently and can be changed any time. The configurations you are using are saved into this configuration file. This is updated each time as you press **<Apply>** button.

▪ **User Configuration:**

It is the configuration file for the specified or backup purposes and can be updated while having confirmed the configuration. You can retrieve it by performing Restore User Configuration.

4.19.1 Factory Default

Function name:

Restore Default Configuration (includes default IP address)

Function description:

Restore Default Configuration function can retrieve ex-factory setting to replace the start configuration. And the IP address of the switch will also be restored to 192.168.1.1. If users do not want to change current IP address when restoring default configuration, you can click "**Restore Default Configuration without changing current IP address**"

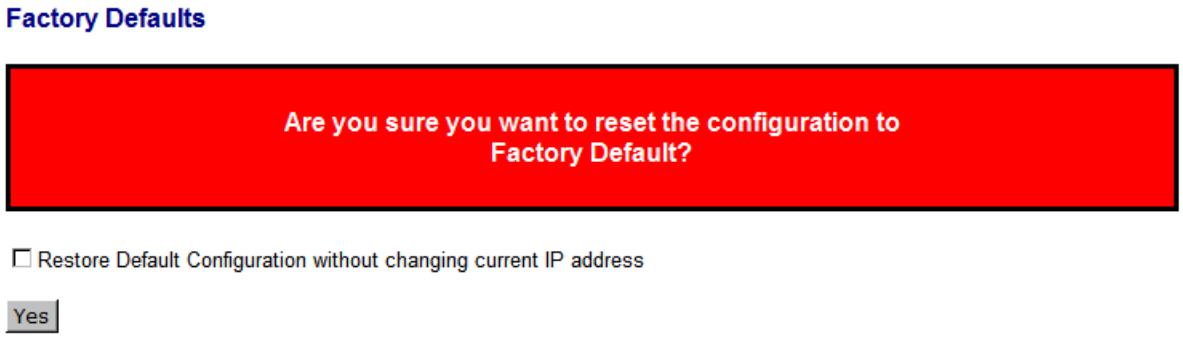
Factory Defaults
Are you sure you want to reset the configuration to Factory Default?
Restore Default Configuration without changing current IP address
Yes

4.19.2 Save Start

Function name:

Save As Start Configuration

Function description:

Save the current configuration as a start configuration file in flash memory.

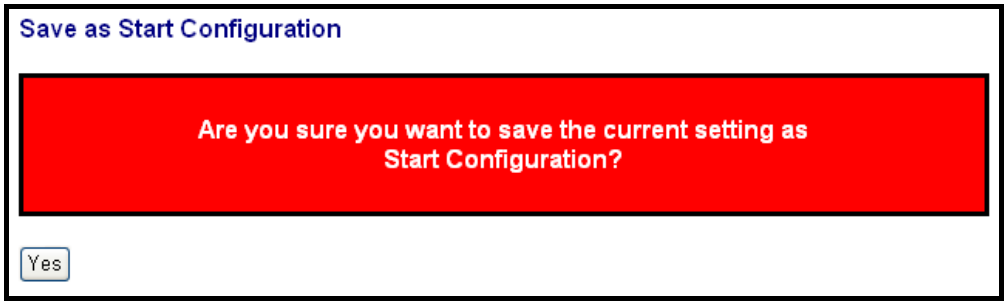

4.19.3 Save user

Function name:

Save As User Configuration

Function description:

Save the current configuration as a user configuration file in flash memory.

4.19.4 Restore user

Function name:

Restore User Configuration

Function description:

Restore User Configuration function can retrieve the previous confirmed working configuration stored in the flash memory to update start configuration. When

completing to restore the configuration, the system's start configuration is updated and will be changed its system settings after rebooting the system.

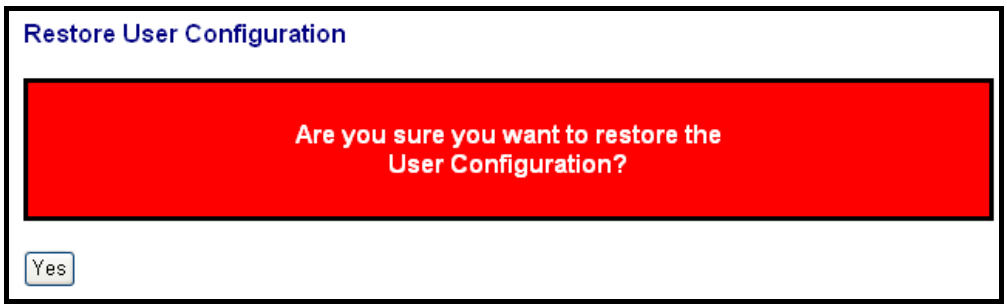

4.20 Export / Import

Function name:

Export/ Import

Function description:

With this function, user can back up or reload the configuration files of Save As Start or Save As User via TFTP.

Parameter description:

Export File Path:

Export Start:

Export Save As Start's config file stored in the flash.

Export User-Conf:

Export Save As User's config file stored in the flash.

Import File Path:

Import Start:

Import Save As Start's config file stored in the flash.

Import User-Conf:

Import Save As User's config file stored in the flash.

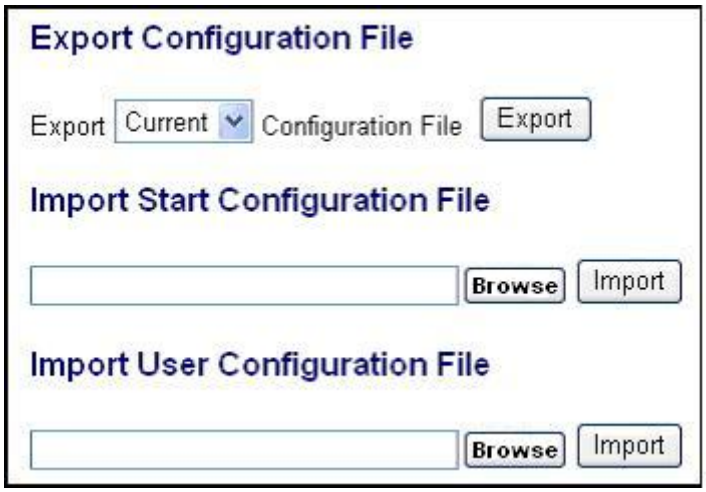

4.21 Diagnostics

Three functions, including Diagnostics, Loopback Test and Ping Test are contained in this function folder for device self-diagnostics. Each of them will be described in detail orderly in the following sections.

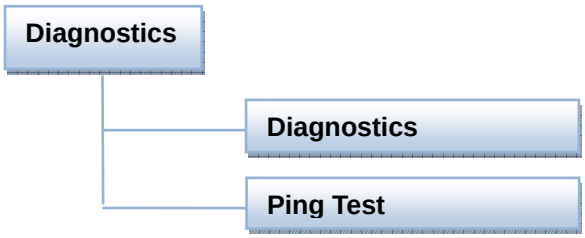

4.21.1 Diag

Function name:

Diagnostics

Function description:

Diagnostics function provides a set of basic system diagnosis. It let users know that whether the system is health or needs to be fixed. The basic system check includes EEPROM test, UART test, DRAM test and Flash test.

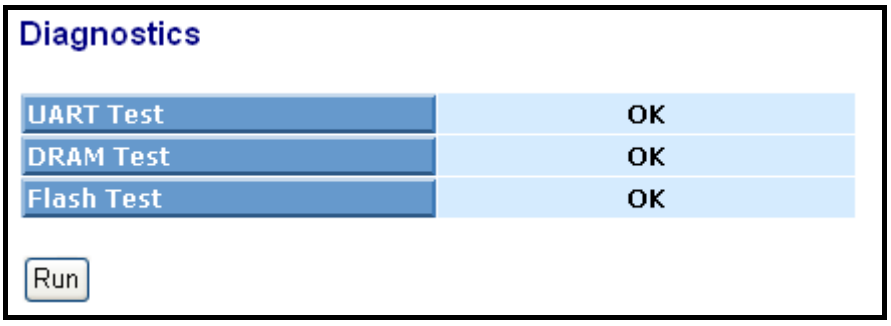

4.21.2 Ping

Function name:

Ping Test

Function description:

Ping Test function is a tool for detecting if the target device is alive or not through ICMP protocol which abounds with report messages. The switch provides Ping Test function to let you know that if the target device is available or not. You can simply fill in a known IP address and then click **<Ping>** button. After a few seconds later, the switch will report you the pinged device is alive or dead in the field of Ping Result.

Parameter description:

IP Address:

An IP address with the version of v4. For example, 192.168.1.1.

Default Gateway:

IP address of the default gateway.

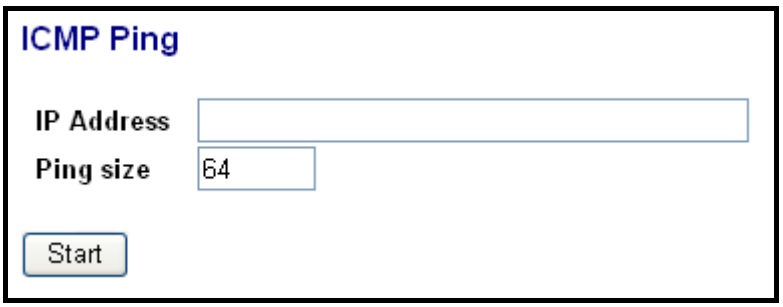

4.22 Maintenance

This chapter will introduce the reset and firmware upgrade function for the firmware upgrade and key parameters change system maintenance requirements.

4.22.1 Reset Device

Function name:

Reset Device

Function description:

We offer you many ways to reset the switch, including power up, hardware reset and software reset. You can press the RESET button in the front panel to reset the switch. After upgrading software, changing IP configuration or changing VLAN mode configuration, then you must reboot to have the new configuration taken effect. Here we are discussing is software reset for the “reboot” in the main menu.

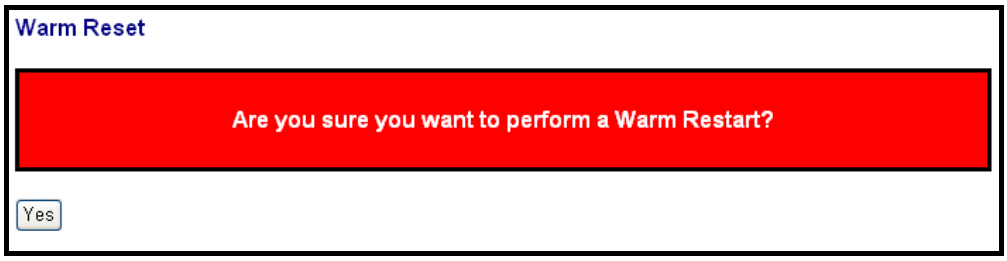

4.22.2 Software Upload

Function name:

Software Upload

Function description:

Click on **<Browse>** to select a specific SNMP-24MGB firmware file from the Web management PC, then click on **<Upload>** to confirm the upgrade firmware action. The new firmware will be uploaded into the switch and write into flash memory. You have to reboot the switch for new firmware take effect after the firmware upgrade successfully.

4.23 Logout

You can manually logout by performing Logout function. In the switch, it provides another way to logout. You can configure it to logout automatically.

Function name:

Logout

Function description:

The switch allows you to logout the system to prevent other users from the system without the permission. If you do not logout and exit the browser, the switch will automatically have you logout in five minutes.

\

Parameter description:

Logout:

Click on **<Logout>** to leave the web UI management function.

5 CLI Management in SNMP-24MGB

In this chapter, we will explain features that are available through console. For detailed descriptions on the concept and application of the settings, please refer to chapter 4.

5.1 Connecting to the Console Port

The Console port is a female DB-9 connector that enables a connection to a PC or terminal for monitoring and configuring the Switch. Use the supplied RS-232 cable with a male DB-9 connector to connect a terminal or PC to the Console port.

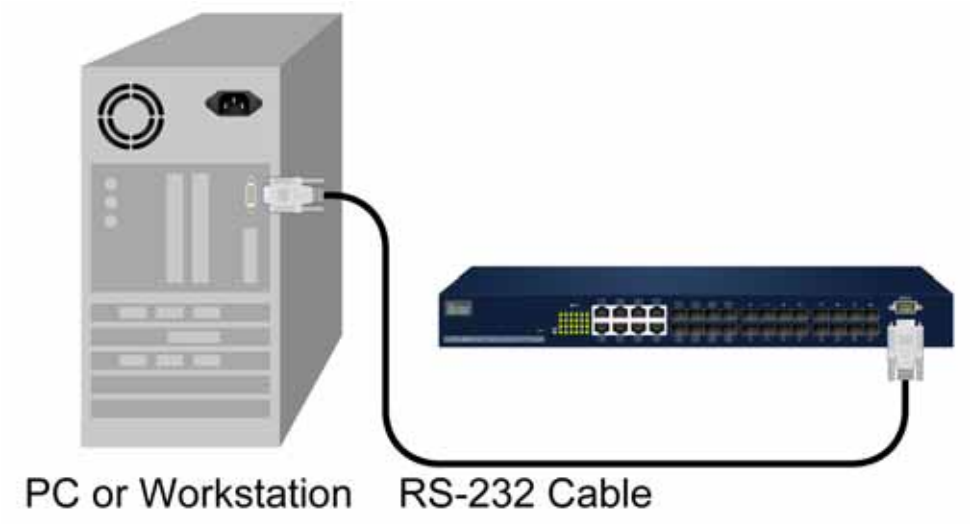

5.2 Login in the Console Interface

When the connection between Switch and PC is ready, turn on the PC and run a terminal emulation program or **Hyper Terminal** and configure its **communication parameters** to match the following default characteristics of the console port:

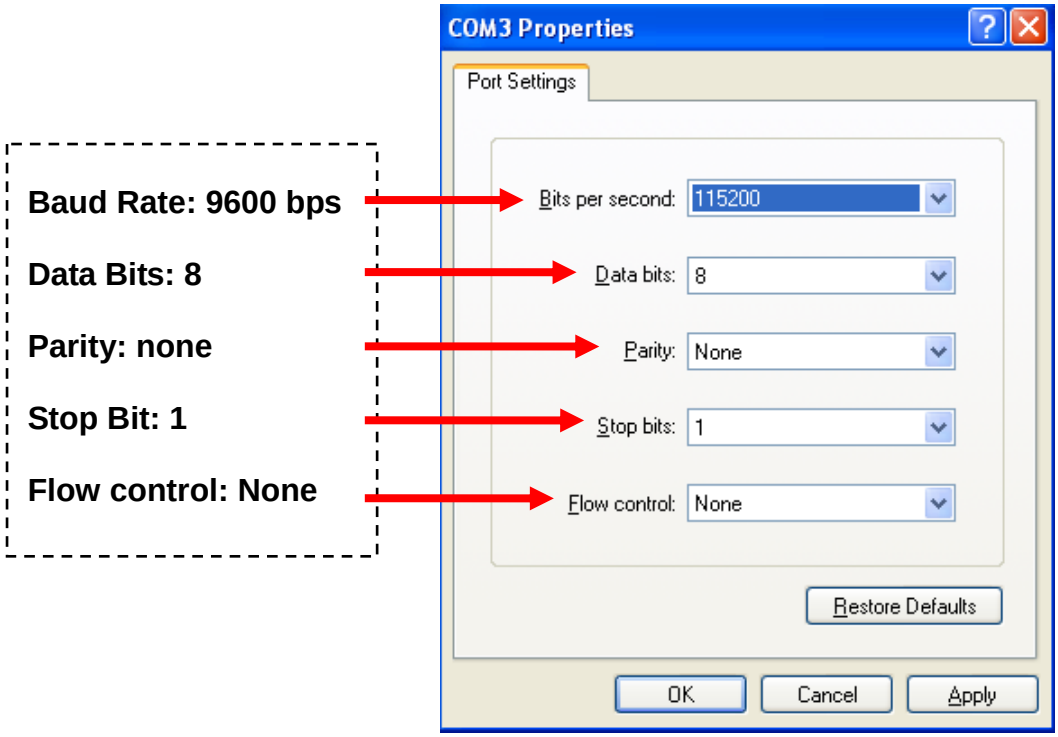

After you login successfully, the prompt will be shown as "#" if you are the first login person and your authorization is administrator; otherwise it may show "**$**". See the following two figures. The former means you behave as an administrator and have the access right of the system. As to the latter, it means you behave as a guest and are only allowed to view the system without the permission to do any setting for this switch.

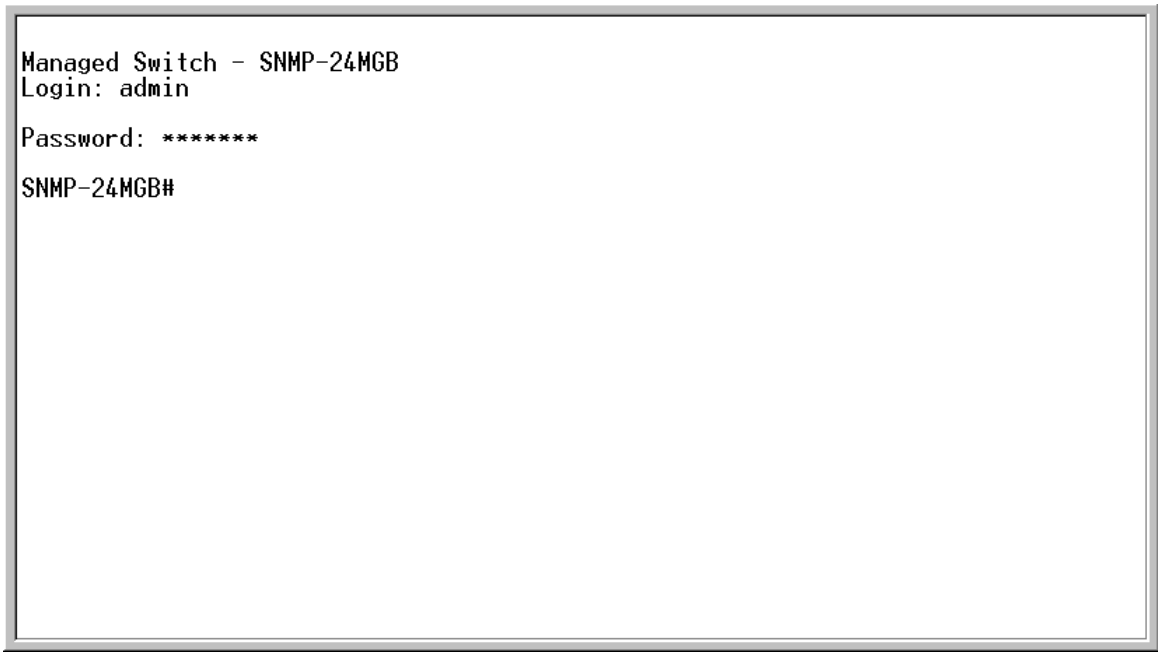

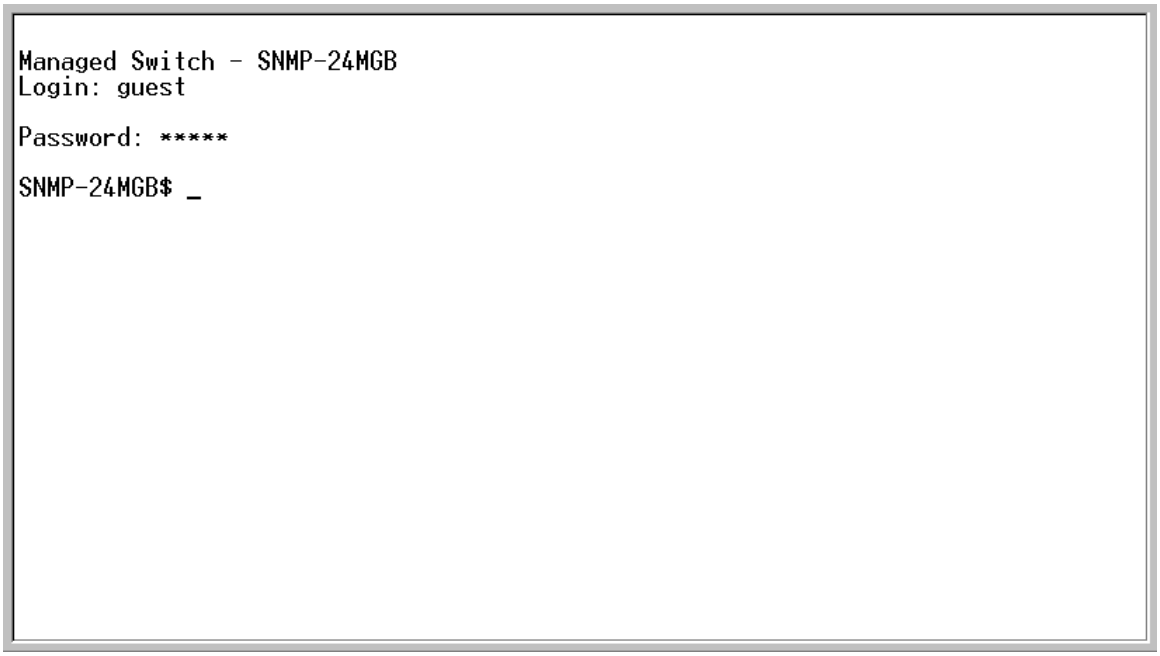

5.3 Command of CLI

To see the commands of the mode, please input "**?**" after the prompt, then all commands will be listed in the screen. All commands can be divided into two categories, including **global commands** and l**ocal commands**. Global commands can be used wherever the mode you are. They are "exit", "end", "help", "history", "logout", "save start", "save user", "restore default" and "restore user". For more details, please refer to Section 5.3.1.

Command instructions reside in the corresponding modes are local commands. The same command with the same command name may occur but perform totally different function in different modes. For example, "show" in IP mode performs displaying the IP information; however, it performs displaying the system information in system mode. For more details, please refer to Section 4-2-2.

```
Login: admin

Password: *******

SNMP-24MGB# ?
  802.1X              Enter into 802.1X mode
  account             Enter into account mode
  acl                 Enter into acl mode
  alarm               Enter into alarm mode
  autologout          Change autologout time
  config-file         Enter into config file mode
  dhcp_snooping       Enter into dhcp snooping mode
  diagnostics         Enter into diagnostics mode
  firmware            Enter into firmware mode
  gvrp                Enter into gvrp mode
  hostname            Change hostname
  ip                  Enter into ip mode
  ip_mac_binding      Enter into ip mac binding mode
  lldp                Enter into lldp mode
  loop-detection      Enter into Loop Detection(LD) mode
  mac                 Enter into mac mode
  mirror              Enter into mirror mode
  mstp                Enter into mstp mode
  multicast           Enter into multicast mode
  policy              Enter into Management Policy mode
  port                Enter into port mode
  qos                 Enter into qos mode
  reboot              Reboot the system
  snmp                Enter into snmp mode
...(q to quit)
```

5.3.1 Global Command of CLI

end

Syntax:

end

Description:

Back to the top mode.

When you enter this command, your current position would move to the top mode. If you use this command in the top mode, you are still in the position of the top mode.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB# alarm
SNMP-24MGB (alarm)# events
SNMP-24MGB (alarm-events)# end

SNMP-24MGB#
```

exit

Syntax:

exit

Description:

Back to the previous mode.

When you enter this command, your current position would move back to the previous mode. If you use this command in the top mode, you are still in the position of the top mode.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB# trunk
SNMP-24MGB (trunk)# exit

SNMP-24MGB#
```

help

Syntax:

help

Description:

To show available commands.

Some commands are the combination of more than two words. When you enter this command, the CLI would show the complete commands. Besides, the command would help you classify the commands between the local commands and the global ones.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB# ip
SNMP-24MGB(ip)# help
Commands available:
  ------------<< Local commands >>------------
  set ip               Set ip,subnet mask and gateway
  set dns              Set dns
  enable dhcp          Enable DHCP, and set dns auto or manual
  disable dhcp         Disable DHCP
  show                 Show IP Configuration
  ------------<< Global commands >>------------
  exit                 Back to the previous mode
  end                  Back to the top mode
  help                 Show available commands
  history              Show a list of previously run commands
  logout               Logout the system
  save start           Save as start config
  save user            Save as user config
  restore default      Restore default config
  restore user         Restore user config
```

history

Syntax:

history [#]

Description:

To show a list of previous commands that you had ever run.

When you enter this command, the CLI would show a list of commands which you had typed before. The CLI supports up to 256 records. If no argument is typed, the CLI would list total records up to 256. If optional argument is given, the CLI would only show the last

numbers of records, given by the argument.

Argument:

[#]: show last number of history records. (optional)

Possible value:

[#]: 1, 2, 3, …., 256

Example:

```
SNMP-24MGB (ip)# history
 Command history:
  0. trunk
  1. exit
  2. SNMP-24MGB# trunk
  3. SNMP-24MGB(trunk)# exit
  4. SNMP-24MGB#
  5. ?
  6. trunk
  7. exit
  8. alarm
  9. events
 10. end
 11. ip
 12. help
 13. ip
 14. history

SNMP-24MGB (ip)# history 3
 Command history:
 13. ip
 14. history
 15. history 3

SNMP-24MGB(ip)#
```

logout

Syntax:

logout

Description:

When you enter this command via Telnet connection, you would logout the system and disconnect. If you connect the system through direct serial port with RS-232 cable, you would logout the system and be back to the initial login prompt when you run this command.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB# logout
```

restore default

Syntax:

restore default

Description:

When you use this function in CLI, the system will show you the information “Do you want to restore the default IP address?(y/n)”. If you choose Y or y, the IP address will restore to default “192.168.1.1”. If you choose N or n, the IP address will keep the same one that you had saved before.

If restoring default successfully, the CLI would prompt if reboot immediately or not. If you press Y or y, the system would reboot immediately; otherwise, it would be back to the CLI system. After restoring default configuration, all the changes in the startup configuration would be lost. After rebooting, the entire startup configuration would reset to factory default.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB # restore default
```

```
Restoring ...
Restore Default Configuration Successfully
Press any key to reboot system.
```

restore user

Syntax:

restore user

Description:

To restore the startup configuration as user defined configuration. If restoring default successfully, the CLI would prompt if reboot immediately or not. If you press Y or y, the system would reboot immediately; others would back to the CLI system. After restoring user-defined configuration, all the changes in the startup configuration would be lost. After rebooting, the entire startup configuration would replace as user defined one.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB # restore user
Restoring ...
Restore User Configuration Successfully
Press any key to reboot system.
```

save start

Syntax:

save start

Description:

To save the current configuration as the start one. When you enter this command, the CLI would save your current configuration into the non-volatile FLASH. If you want the configuration still works after rebooting, save the configuration using the command ‘save stat’.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB # save start
Saving start...
Save Successfully

SNMP-24MGB #
```

save user

Syntax:

save user

Description:

To save the current configuration as the user-defined configuration. When you enter this command, the CLI would save your current configuration into the non-volatile FLASH as user-defined configuration.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB # save user
Saving user...
Save Successfully

SNMP-24MGB #
```

5.3.2 Local Command of CLI

- **802.1X**

set maxReq

Syntax:

set maxReq <port-range> <vlaue>

Description:

The maximum number of times that the state machine will retransmit an EAP Request packet to the Supplicant before it times out the authentication session.

Argument:

<port range> : syntax 1,5-7, available from 1 to 24

<value>: max-times , range 1-10

Possible value:

<port range> : 1 to 24

<value>: 1-10, default is 2

Example:

```
SNMP-24MGB(802.1X)# set maxReq 2 2
```

set mode

Syntax:

set mode <port-range> <mode>

Description:

To set up the 802.1X authentication mode of each port.

Argument:

<port range> : syntax 1,5-7, available from 1 to 24

<mode>: set up 802.1X mode

0:disable the 802.1X function

1:set 802.1X to Multi-host mode

Possible value:

<port range> : 1 to 24

<mode>: 0 or 1

Example:

```
SNMP-24MGB(802.1X)# set mode 2 1
SNMP-24MGB(802.1X)#
```

set port-control

Syntax:

set port-control <port-range> <unauthorized| authorized| auto>

Description:

To set up 802.1X status of each port.

Argument:

<port range> : syntax 1,5-7, available from 1 to 24

<authorized> : Set up the status of each port

0:ForceUnauthorized

1:ForceAuthorized

2:Auto

Possible value:

<port range> : 1 to 24

<authorized> : 0, 1 or 2

Example:

```
SNMP-24MGB(802.1X)# set port-control 2 2
```

set quietPeriod

Syntax:

set quietPeriod <port-range> <value>

Description:

A timer used by the Authenticator state machine to define periods of time during when it will not attempt to acquire a Supplicant.

Argument:

<port range> : syntax 1,5-7, available from 1 to 24

<value> : timer , range 0-65535

Possible value:

<port range> : 1 to 24

<value> : 0-65535, default is 60

Example:

```
SNMP-24MGB(802.1X)# set quietPeriod 2 30
```

set reAuthEnabled

Syntax:

set reAuthEnabled <port-range> <on | off >

Description:

A constant that define whether regular reauthentication will take place on this port.

Argument:

<port range> : syntax 1,5-7, available from 1 to 24

<on | off > :

0:OFF Disable reauthentication

1:ON Enable reauthentication

Possible value:

<port range> : 1 to 24

< on | off l> : 0 or 1, default is 1

Example:

```
SNMP-24MGB(802.1X)# set reAuthEnabled 2 1
```

set reAuthMax

Syntax:

set reAuthMax <port-range> <value>

Description:

The number of reauthentication attempts that are permitted before the port becomes Unauthorized.

Argument:

<port range> : syntax 1,5-7, available from 1 to 24

<value> : max. value , range 1-10

Possible value:

<port range> : 1 to 24

<value> : 1-10, default is 2

Example:

```
SNMP-24MGB(802.1X)# set reAuthMax 2 2
```

set reAuthPeriod

Syntax:

set reAuthPeriod <port-range> <value>

Description:

A constant that defines a nonzero number of seconds between periodic reauthentication of the supplicant.

Argument:

<port range> : syntax 1,5-7, available from 1 to 24

<value> : timer , range 1-65535

Possible value:

<port range> : 1 to 24

<value> : 1-65535, default is 3600

Example:

```
SNMP-24MGB(802.1X)# set reAuthPeriod 2 3600
```

set serverTimeout

Syntax:

set serverTimeout <port-range> <value>

Description:

A timer used by the Backend Authentication state machine in order to determine timeout conditions in the exchanges between the Authenticator and the Supplicant or Authentication Server. The initial value of this timer is either suppTimeout or serverTimeout, as determined by the operation of the Backend Authentication state machine.

Argument:

<port range> : syntax 1,5-7, available from 1 to 24

<value> : timer , range 1-65535

Possible value:

<port range> : 1 to 24

<value> : 1-65535, default is 30

Example:

```
SNMP-24MGB(802.1X)# set serverTimeout 2 30
```

set auth-server

Syntax:

set auth-server <ip-address> <udp-port> <secret-key>

Description:

To configure the settings related with 802.1X Radius Server.

Argument:

<ip-address>: the IP address of Radius Server

<udp-port>: the service port of Radius Server(Authorization port)

<secret-key>: set up the value of secret-key, and the length of secret-key is from 1 to 31

Possible value:

<udp-port > : 1~65535, default is 1812

Example:

```
SNMP-24MGB(802.1X)# set auth-server 192.168.1.115 1812 WinRadius
```

set suppTimeout

Syntax:

set suppTimeout <port-range> <value>

Description:

A timer used by the Backend Authentication state machine in order to determine timeout conditions in the exchanges between the Authenticator and the Supplicant or Authentication Server. The initial value of this timer is either suppTimeout or serverTimeout, as determined by the operation of the Backend Authentication state machine.

Argument:

<port range> : syntax 1,5-7, available from 1 to 24

<value> : timer , range 1-65535

Possible value:

<port range> : 1 to 24

<value> : 1-65535, default is 30

Example:

```
SNMP-24MGB(802.1X)# set suppTimeout 2 30
```

set txPeriod

Syntax:

set txPeriod <port-range> <value>

Description:

A timer used by the Authenticator PAE state machine to determine when an EAPOL PDU is to be transmitted

Argument:

<port range> : syntax 1,5-7, available from 1 to 24

<value> : timer , range 1-65535

Possible value:

<port range> : 1 to 24

<value> : 1-65535, default is 30

Example:

```
SNMP-24MGB(802.1X)# set txPeriod 2 30
```

show status

Syntax:

show status

Description:

To display the mode of each port.

Argument:

None

Possible value:

None

Example:

```
SNMP-24MGB(802.1X)# show status
 Port      Mode
====== ============
   1     Disable
   2     Multi-host
   3     Disable
   4     Disable
   5     Disable
   6     Disable
```

show port-config

Syntax:

show port-config <port-range>

Description:

To display the parameter settings of each port.

Argument:

<port range> : syntax 1,5-7, available from 1 to 24

Possible value:

<port range> : 1 to 24

Example:

```
SNMP-24MGB(802.1X)# show port-config 1, 2
port  1) Mode          : Disabled
port control  : Auto
```

```
          reAuthMax     : 2
          txPeriod      : 30
          Quiet Period  : 60
          reAuthEnabled : ON
          reAuthPeriod  : 120
          max. Request  : 2
          suppTimeout   : 30
          serverTimeout : 30

port  2) Mode           : Disabled
port control  : Auto
          reAuthMax     : 2
          txPeriod      : 30
          Quiet Period  : 60
          reAuthEnabled : ON
          reAuthPeriod  : 120
          max. Request  : 2
          suppTimeout   : 30
          serverTimeout : 30
```

show statistics

Syntax:

show statistics <#>

Description:

To display the statistics of each port.

Argument:

<#> syntax 1,5-7, available from 1 to 24

Possible value:

<#> 1 to 24

show server

Syntax:

show server

Description:

Show the Radius server configuration

Argument:

None

Possible value:

None

Example:

```
SNMP-24MGB(802.1X)# show server
Authentication Server
_____________________________________
IP Address: 192.168.1.1
UDP Port  : 1812
Secret Key   : Radius

Accounting Server
_____________________________________
IP Address: 192.168.1.1
UDP Port  : 1812
Secret Key   : Radius
```

- **account**

add

Syntax:

add <name>

Description:

To create a new guest user. When you create a new guest user, you must type in password and confirm password.

Argument:

<name> : new account name

Possible value:

A string must be at least 5 characters.

Example:

```
SNMP-24MGB(account)# add aaaaa
Password:
Confirm Password:
SNMP-24MGB(account)#
```

del

Syntax:

del <name>

Description:

To delete an existing account.

Argument:

<name> : existing user account

Possible value:

None.

Example:

```
SNMP-24MGB(account)# del aaaaa
Account aaaaa deleted
```

modify

Syntax:

modify <username>

Description:

To change the username and password of an existing account.

Argument:

<name> : existing user account

Possible value:

None.

Example:

```
SNMP-24MGB(account)# modify aaaaa
username/password: the length is from 5 to 15.
Current username (aaaaa):bbbbb
New password:
Confirm password:
Username changed successfully.
Password changed successfully.
```

show

Syntax:

show

Description:

To show system account, including account name and identity.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB(account)# show
Account Name       Identity
---------------- --------------
 admin             Administrator
 guest                 guest
```

● ACL

ace

Syntax:

ace <index>

Description:

To display the ace configuration.

Argument:

<index> : the access control rule index value

Possible value:

None.

Example:

```
SNMP-24MGB(acl)# ace 2

index: 2
rule: switch
vid: any
tag_prio: any
dmac: any
frame type: arp
arp type: Request/Reply (opcode): any
source ip: any
destination ip: any
ARP flag
ARP SMAC Match: any
RARP DMAC Match: any
IP/Ethernet Length: any
IP: any
Ethernet: any
action: 1
rate limiter: 0
copy port: 0
```

action

Syntax:

action <port> <permit|deny> <rate_limiter> <port copy>

Description:

To set the access control per port as packet filter action rule.

Argument:

<port> : 1-24

<permit/deny>: permit: 1, deny: 0

<rate_limiter>: 0-16 (0:disable)

<port copy> : 0-24 (0:disable)

Possible value:

<port> : 1-24

<permit/deny>: 0-1

<rate_limiter>: 0-16

<port copy> : 0-24

Example:

```
SNMP-24MGB(acl)# action 5 0 2 2
SNMP-24MGB(acl)# show
port policy id  action   rate limiter port copy   counter a class map
 ..       ..    ......     ....          ...              ..
 5        1      deny       2            2
 23       1    permit       0            0               0
 24       1    permit       0            0               0

rate limiter   rate(pps)
------------ ------------
      1               1
      2               1
      3               1
      4               1
      5               1

      ......          ......
SNMP-24MGB(acl)#
```

delete

Syntax:

delete <index>

Description:

To delete the ACE (Access Control Entry) configuration on the switch.

Argument:

<index> : the access control rule index value

Possible value:

None.

Example:

```
SNMP-24MGB(acl)# delete 1
SNMP-24MGB(acl)#
```

move

Syntax:

move <index1> <index2>

Description:

To move the ACE (Access Control Entry) configuration between index1 and index2..

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB(account)# move 1 2
```

policy

Syntax:

policy <policy> <ports>

Description:

To set acl port policy on switch

Argument:

<policy> : 1-8

<ports> : 1-24

Possible value:

<policy> : 1-8

<ports> : 1-24

Example:

```
SNMP-24MGB(acl)# policy 3 10
SNMP-24MGB(acl)#
```

ratelimiter

Syntax:

ratelimiter <id> <rate>

Description:

To set access control rule with rate limiter on switch

Argument:

<id> : 1-16

<rate> : 1,2,4,8,16,32,64,128,256,512,1000,2000, 4000,8000,
16000,32000,64000,128000,256000,512000,1024000

Possible value:

<id> : 1-16

<rate> : 1,2,4,8,16,32,64,128,256,512,1000,2000, 4000,8000,
16000,32000,64000,128000,256000,512000,1024000

Example:

```
SNMP-24MGB(acl)# ratelimiter 3 16000
SNMP-24MGB(acl)#
```

set

Syntax:

set [<index>] [<next index>]
[switch | (port <port>) | (policy <policy>)]
[<vid>] [<tag_prio>] [<dmac_type>]
[(any) |

(etype [<etype>] [<smac>]) |
(arp [<arp type>] [<opcode>]
(any | [<source ip>] [<source ip mask>])
(any | [<destination ip>] [<destination ip mask>])
[<source mac>] [<arp smac match flag>]
[<raro dmac match flag>] [<ip/ethernet length flag>]
[<ip flag>] [<ethernet flag>]) |
(ip [(<source ip> <source ip mask>) | any]
[(<destination ip> <destination ip mask>) | any]
[<ip ttl>] [<ip fragment>] [<ip option>]
[(icmp <icmp type> <icmp code>) |
(udp <source port range> <destination port range>) |
(tcp <source port range> <destination port range>
<tcp fin flag> <tcp syn flag> <tcp rst flag>
<tcp psh flag> <tcp ack flag> <tcp urg flag>) |
(other <ip protocol value>) |
(any)]
]
[<action>] [<rate limiter>] [<port copy>]

Description:

To set access control entry on switch

Argument:

Possible value:

Example:

show

Syntax:

show

Description:

To show all access control entry setting on switch

Argument:

none

Possible value:

none

Example:

```
SNMP-24MGB(acl)# show
port policy id  action   rate limiter port copy   counter a class map
 ..       ..    ......     ....          ...              ..
 5        1      deny       2            2
 23       1    permit       0            0               0
 24       1    permit       0            0               0

rate limiter   rate(pps)
------------ ------------
      1                1
      2                1
      3                1
      4                1
      5                1

      ......           ......
SNMP-24MGB(acl)#
```

- **alarm**

<<email>>

del mail-address

Syntax:

del mail-address <#>

Description:

To remove the configuration of E-mail address.

Argument:

<#>: email address number, range: 1 to 6

Possible value:
<#>: 1 to 6
Example:

```
SNMP-24MGB(alarm-email)# del mail-address 2
```

del server-user

Syntax:
del server-user
Description:
To remove the configuration of server, user account and password.
Argument:
None.
Possible value:
None.
Example:

```
SNMP-24MGB(alarm-email)# del server-user
```

set mail-address

Syntax:
set mail-address <#> <mail address>
Description:
To set up the email address.
Argument:
<#> :email address number, range: 1 to 6
<mail address>:email address
Possible value:
<#>: 1 to 6
Example:

```
SNMP-24MGB(alarm-email)# set mail-address 1  abc@mail.abc.com
```

set server

Syntax:
set server <ip>

Description:
To set up the IP address of the email server.
Argument:
<ip>:email server ip address or domain name
Possible value:
None.
Example:

```
SNMP-24MGB(alarm-email)# set server 192.168.1.6
```

set user

Syntax:
set user <username>
Description:
To set up the account and password of the email server.
Argument:
<username>: email server account and password
Possible value:
None.
Example:

```
SNMP-24MGB(alarm-email)# set user admin
```

show

Syntax:
show
Description:
To display the configuration of e-mail.
Argument:
None.
Possible value:
None.
Example:

```
SNMP-24MGB(alarm-email)# show
Mail Server     : 192.168.1.6
Username        : admin
Password        : ****************
```

```
Email Address 1: abc@mail.abc.com
Email Address 2:
Email Address 3:
Email Address 4:
Email Address 5:
Email Address 6:
```

<<events>>

del all

Syntax:
del all <range>
Description:
To disable email and trap of events.
Argument:
<range>:del the range of events, syntax 1,5-7
Possible value:
<range>: 1~24
Example:

```
SNMP-24MGB(alarm-events)# del all 1-3
```

del email

Syntax:
del email <range>
Description:
To disable the email of the events.
Argument:
<range>:del the range of email, syntax 1,5-7
Possible value:
<range>: 1~24
Example:

```
SNMP-24MGB(alarm-events)# del email 1-3
```

del trap

Syntax:
del trap <range>
Description:
To disable the trap of the events.
Argument:
<range>:del the range of trap, syntax 1,5-7
Possible value:
<range>: 1~24
Example:

```
SNMP-24MGB(alarm-events)# del trap 1-3
```

set all

Syntax:
set all <range>
Description:
To enable email and trap of events.
Argument:
<range>:set the range of events, syntax 1,5-7
Possible value:
<range>: 1~24
Example:

```
SNMP-24MGB(alarm-events)# set all 1-3
```

set email

Syntax:
set email <range>
Description:
To enable the email of the events.
Argument:
<range>:set the range of email, syntax 1,5-7
Possible value:
<range>: 1~24
Example:

```
SNMP-24MGB(alarm-events)# set email 1-3
```

set trap

Syntax:
set trap <range>
Description:
To enable the trap of the events.
Argument:
<range>:set the range of trap, syntax 1,5-7
Possible value:
<range>: 1~24
Example:

```
SNMP-24MGB(alarm-events)# set trap 1-3
```

show

Syntax:
show
Description:
To display the configuration of alarm event.
Argument:
None.
Possible value:
None.
Example:

```
SNMP-24MGB(alarm-events)# show
   Events                    Email  Trap
----------------------------------------
1  Cold Start                        v
2  Warm Start                        v
3  Link Down                         v
4  Link Up                           v
5  Authentication Failure            v
6  Login
7  Logout
```

```
8  Module Inserted
9  Module Removed
10 Dual Media Swapped
11 Looping Detected
12 STP Disabled
13 STP Enabled
14 STP Topology Changed
15 LACP Disabled
16 LACP Enabled
17 LACP Member Added
18 LACP Aggregates Port Failure
19 GVRP Disabled
20 GVRP Enabled
21 VLAN Disabled
22 Port-based Vlan Enabled
23 Tag-based Vlan Enabled
24 IP MAC Binding Enabled
25 IP MAC Binding Disabled
26 IP MAC Binding Client Authenticate error
27 IP MAC Binding Server Authenticate error
```

show (alarm)

Syntax:
show
Description:
The Show for alarm here is used to display the configuration of Events, or E-mail.
Argument:
None.
Possible value:
None.
Example:

```
SNMP-24MGB(alarm)# show events
SNMP-24MGB(alarm)# show email
```

- **autologout**

autologout

Syntax:
autologout <time>
Description:
To set up the timer of autologout.
Argument:
<time>: range 1 to 3600 seconds, 0 for autologout off, current setting is 180 seconds.
Possible value:
<time>: 0,1-3600
Example:

```
SNMP-24MGB# autologout 3600
Set autologout time to 3600 seconds
```

- **config-file**

export

Syntax:
export <current | user> < ip address>
Description:
To run the export function.
Argument:
< Usage> set up current or user
< ip address> the TFTP server ip address
Possible value:
none
Example:

```
SNMP-24MGB(config-file)# export current 192.168.1. 63
```

```
Export successful.
```

import

Syntax:

import <current | user> < ip address>

Description:

To run the import start function.

Argument:

None

Possible value:

None

Example:

```
SNMP-24MGB(config-file)# import current 192.168.1.63
Import successful.
```

● firmware

Upgrade

Syntax:

upgrade <ip_address> <file_path>

Description:

To set up the image file that will be upgraded.

Argument:

< ip address> : TFTP server ip address

<filepath>: upgrade file path

Possible value:

< ip address> : TFTP server ip address

<filepath>: upgrade file path

Example:

```
SNMP-24MGB(firmware)# upgrade 192.168.2.4 snmp-24mgb_v2.03.img
```

- **gvrp**

set state

Syntax:

set state < 0 | 1>

Description:

To disable/ enable the gvrp function.

Argument:

0 : disable the gvrp function

1 : enable the gvrp function

Possible value:

0 : disable the gvrp function

1 : enable the gvrp function

Example:

```
SNMP-24MGB(gvrp)# set state 1
```

group applicant

Syntax:

group applicant <vid> <port> < 0 | 1>

Description:

To enter any of gvrp group for changing gvrp group setting. You can change the applicant or registrar mode of existing gvrp group per port.

Argument:

<vid>: enter which gvrp group you had created, using value is vid. Available range: 1 to 4094

<port>: 1 to 24

< 0 | 1> :

Possible value:

<vid>: 1~4094

<port>: 1 to 24

Example:

```
SNMP-24MGB(gvrp)# group applicant 2 5 0
GVRP group information
Current Dynamic Group Number: 1
VID  Member Port
---- -----------------------------------------------
2    5
```

set applicant

Syntax:

set applicant <port> < 0 | 1 >

Description:

To set default applicant mode for each port.

Argument:

<port>: port range, syntax 1,5-7, available from 1 to 24

<0>: set applicant as normal mode

<1>: set applicant as non-participant mode

Possible value:

<port>: 1 to 24

< 0 | 1 >: normal or non-participant

Example:

```
SNMP-24MGB(gvrp)# set applicant 1-10 non-participant
```

set registrar

Syntax:

set registrar <port> < 0 | 1 | 2>

Description:

To set default registrar mode for each port.

Argument:

<port>: port range, syntax 1,5-7, available from 1 to 24

<0>: set registrar as normal mode

<1>: set registrar as fixed mode

<2>: set registrar as forbidden mode

Possible value:

<range>: 1 to 24

< 0 | 1 | 2>: normal or fixed or forbidden

Example:

```
SNMP-24MGB(gvrp)# set registrar 1-5 fixed
```

set restricted

Syntax:

set restricted <port> <0 | 1 | 2>

Description:

To set the restricted mode for each port.

Argument:

<port>: port range, syntax 1,5-7, available from 1 to 24

<0>: set restricted normal

<1>: set restricted fixed

<2>: set restricted forbidden

Possible value:

<port>: 1 to 24

< 0| 1| 2>: normal, fixed or forbidden

Example:

```
SNMP-24MGB(gvrp)# set restricted 1-10 1
SNMP-24MGB(gvrp)# show config
GVRP state: Enable
Port Join Time Leave Time LeaveAll Time    Applicant    Registrar Restricted
---- --------- ---------- ------------- -------------- --------- ----------
  1      20         60          1000      Normal          Normal      Enable
  2      20         60          1000      Normal          Normal      Enable
  3      20         60          1000      Normal          Normal      Enable
  4      20         60          1000      Normal          Normal      Enable
  5      20         60          1000      Normal          Normal      Enable
  6      20         60          1000      Normal          Normal      Enable
  7      20         60          1000      Normal          Normal      Enable
  8      20         60          1000      Normal          Normal      Enable
  9      20         60          1000      Normal          Normal      Enable
 10      20         60          1000      Normal          Normal      Enable
                                          :
                                                                        :
```

:

22	20	60	1000	Normal	Normal	Disable
23	20	60	1000	Normal	Normal	Disable
24	20	60	1000	Normal	Normal	Disable

set timer

Syntax:

set timer <port> <JoinTime> <leaveTime> <leaveAllTime>

Description:

To set gvrp join time, leave time, and leaveall time for each port.

Argument:

<port> : port range, syntax 1,5-7, available from 1 to 24

<JoinTime>: join timer, available from 20 to 100

<LeaveTime>: leave timer, available from 60 to 300

<LeaveAllTime>: leaveall timer, available from 1000 to 5000

Leave Time must equal double Join Time at least.

Possible value:

<port> : 1 to 24

<JoinTime>: 20 to 100

<LeaveTime>: 60 to 300

<LeaveAllTime>: 1000 to 5000

Example:

```
SNMP-24MGB(gvrp)# set timer 2-8 25 80 2000
```

show

Syntax:

show

Description:

To display the gvrp configuration.

Argument:

None

Possible value:

None

Example:

```
SNMP-24MGB(gvrp)# show
GVRP state: Enable
Port Join Time Leave Time LeaveAll Time    Applicant    Registrar Restricted
---- --------- ---------- ------------- -------------- --------- ----------
  1      20         60          1000      Normal          Normal      Disable
  2      25         80          2000      Normal          Normal      Disable
  3      25         80          2000      Normal          Normal      Disable
  4      25         80          2000      Normal          Normal      Disable
  5      25         80          2000      Normal          Normal      Disable
  6      25         80          2000      Normal          Normal      Disable
  7      25         80          2000      Normal          Normal      Disable
  8      25         80          2000      Normal          Normal      Disable
                                             :
                                             :
 23      20         60          1000      Normal          Normal      Disable
 24      20         60          1000      Normal          Normal      Disable
```

counter

Syntax:

counter <port>

Description:

To display the counter number of the port.

Argument:

<port>: port number

Possible value:

<port>: available from 1 to 24

Example:

```
SNMP-24MGB(gvrp)# counter 2
```

```
Received

Total GVRP Packets   : 0
Invalid GVRP Packets : 0
LeaveAll message     : 0
JoinEmpty message    : 0
JoinIn message       : 0
LeaveEmpty message   : 0
Empty message        : 0

Transmitted
Total GVRP Packets   : 0
Invalid GVRP Packets : 0
LeaveAll message     : 0
JoinEmpty message    : 0
JoinIn message       : 0
LeaveEmpty message   : 0
Empty message        : 0
```

group grpinfo

Syntax:

group grpinfo <vid>

Description:

To show the gvrp group.

Argument:

<vid>: To set the vlan id from 1 to 4094

Possible value:

<vid>: 1 to 4094

Example:

```
SNMP-24MGB(gvrp)# group grpinfo 2
GVRP group information
VID  Member Port
---- ------------------------------------------------
```

- **hostname**

hostname

Syntax:
hostname <name>
Description:
To set up the hostname of the switch.
Argument:
<name>: hostname, max. 40 characters.
Possible value:
<name>: hostname, max. 40 characters.
Example:

```
SNMP-24MGB# hostname Company

Company#
```

- **igmp**

set drp

Syntax:
set drp <port >
Description:
Set router ports to disable.
Argument:
<port >: syntax 1,5-7, available from 1 to 24
Possible value:
<port >: 1 to 24
Example:

```
SNMP-24MGB(igmp)# set drp 1-10
```

set erp

Syntax:
set erp <port>
Description:
Set router ports to enable
Argument:
<port>: syntax 1,5-7, available from 1 to 24
Possible value:
<port>: 1 to 24
Example:

```
SNMP-24MGB(igmp)# set erp 1
```

set flood

Syntax:
set flood <state>
Description:
To set up disable / enable unregister ipmc flooding.
Argument:
<state>: 0:disable, 1:enable
Possible value:
<state>: 0,or 1
Example:

```
SNMP-24MGB(igmp)# set flood 1
```

show gm

Syntax:
show gm
Description:
To display group memebership.
Argument:
None.
Possible value:
None.
Example:

```
SNMP-24MGB(igmp)# show gm
```

show igmpp

Syntax:
show igmpp
Description:
To display igmp proxy setting
Argument:
None.
Possible value:
None.
Example:

```
SNMP-24MGB(igmp)# show igmpp
```

- **IP**

disable dhcp

Syntax:
disable dhcp
Description:
To disable the DHCP function of the system.
Argument:
None
Possible value:
None
Example:

```
SNMP-24MGB(ip)# disable dhcp
```

enable dhcp

Syntax:

enable dhcp <manual|auto>

Description:

To enable the system DHCP function and set DNS server via manual or auto mode.

Argument:

<manual|auto> : set dhcp by using manual or auto mode.

Possible value:

<manual|auto> : manual or auto

Example:

```
SNMP-24MGB(ip)# enable dhcp manual
```

set dns

Syntax:

set dns <ip>

Description:

To set the IP address of DNS server.

Argument:

<ip> : dns ip address

Possible value:

168.95.1.1

Example:

```
SNMP-24MGB(ip)# set dns 168.95.1.1
```

set ip

Syntax:

set ip <ip> <mask> <gateway>

Description:

To set the system IP address, subnet mask and gateway.

Argument:

<ip> : ip address

<mask> : subnet mask

<gateway> : default gateway

Possible value:

<ip> : 192.168.1.2 or others

<mask> : 255.255.255.0 or others

<gateway> : 192.168.1.253 or others

Example:

```
SNMP-24MGB(ip)# set ip 192.168.1.2 255.255.255.0 192.168.1.253
```

show

Syntax:

show

Description:

To display the system's DHCP function state, IP address, subnet mask, default gateway, DNS mode, DNS server IP address and current IP address.

Argument:

None

Possible value:

None

Example:

```
SNMP-24MGB(ip)# show

DHCP               : Disable
IP Address         : 192.168.2.237
Current IP Address : 192.168.2.237
Subnet mask        : 255.255.255.0
Gateway            : 192.168.2.252
DNS Setting        : Manual
DNS Server         : 168.95.1.1
```

● ■ ip_mac_binding

set entry

Syntax:

set entry < 0 | 1> < mac> < ip> < port no> < vid>

Description:

To set ip mac binding entry

Argument:

< 0 | 1> : 0 : Client , 1: Server

<mac> : mac address

< ip > : ip address

< port > : syntax 1,5-7, available from 1 to 24

< vid > : vlan id, 1 to 4094

Possible value:

< 0 | 1> : 0 : Client , 1: Server

<mac> : format: 00-02-03-04-05-06

< ip > : ip address

< port > : 1 to 24

< vid > : 1 to 4094

Example:

```
SNMP-24MGB(ip_mac_binding)# set entry 1 00-11-2f-de-7b-a9 192.168.2.2 1 1
```

delete ip

Syntax:

delete ip < 0 | 1> <ip>

Description:

Delete ip mac binding entry by ip.

Argument:

<0 | 1> : 0 : client, 1: server

<ip> : ip address

Possible value:

None

Example:

```
SNMP-24MGB(ip_mac_binding)# delete ip 1 192.168.2.2
```

set state

Syntax:

show

Description:

To display the mac alias entry.

Argument:

None

Possible value:

None

Example:

```
SNMP-24MGB(mac-table-alias)# show
MAC Alias List
      MAC Address       Alias
----- ----------------- ----------------
1)    00-02-03-04-05-06 aaa
2)    00-33-03-04-05-06 ccc
3)    00-44-33-44-55-44 www
```

● loop-detection

disable

Syntax:
disable <#>
Description:
To disable switch ports the loop detection function.
Argument:
<#> : set up the range of the ports to search for, syntax 1,5-7, available form 1 to 24
Possible value:

<#> :1 to 24
Example:

```
SNMP-24MGB(loop-detection)# disable 1-24
SNMP-24MGB(loop-detection)# show
Detection Port        Locked Port
  Port Status         Port Status
--------------------------------
    1  Disable          1  Normal
    2  Disable          2  Normal
    3  Disable          3  Normal
    4  Disable          4  Normal
    5  Disable          5  Normal
    6  Disable          6  Normal
    7  Disable          7  Normal
    8  Disable          8  Normal
.........
```

enable

Syntax:
enable <#>
Description:
To enable switch ports the loop detection function.
Argument:
<#> : set up the range of the ports to search for, syntax 1,5-7, available form 1 to 24
Possible value:
<#> :1 to 24
Example:

```
SNMP-24MGB(loop-detection)# enable 1-24
SNMP-24MGB(loop-detection)# show
Detection Port        Locked Port
  Port Status         Port Status
--------------------------------
    1  Enable           1  Normal
    2  Enable           2  Normal
    3  Enable           3  Normal
    4  Enable           4  Normal
```

```
    5  Enable          5  Normal
    6  Enable          6  Normal
    7  Enable          7  Normal
    8  Enable          8  Normal
    ..............
```

Resume

Syntax:
resume <#>
Description:
To resume locked ports on switch.
Argument:
<#> : set up the range of the ports to search for, syntax 1,5-7, available form 1 to 24
Possible value:
<#> :1 to 24
Example:

```
SNMP-24MGB(loop-detection)# resume 1-24
SNMP-24MGB(loop-detection)# show
Detection Port        Locked Port
  Port Status         Port Status
--------------------------------
    1  Enable          1  Normal
    2  Enable          2  Normal
    3  Enable          3  Normal
    4  Enable          4  Normal
    5  Enable          5  Normal
    6  Enable          6  Normal
    7  Enable          7  Normal
    8  Enable          8  Normal
    ..............
```

show

Syntax:
show
Description:
To display loop detection configure.

Argument:
None
Possible value:
None
Example:

```
SNMP-24MGB(loop-detection)# show
Detection Port        Locked Port
  Port Status         Port Status
--------------------------------
   1  Enable          1  Normal
   2  Enable          2  Normal
   3  Enable          3  Normal
   4  Enable          4  Normal
   5  Enable          5  Normal
   6  Enable          6  Normal
   7  Enable          7  Normal
   8  Enable          8  Normal
   ..............
```

- **Mac**

<<alias>>

del

Syntax:
del <mac>
Description:
To del mac alias entry.
Argument:
<mac> : set up the MAC format: xx-xx-xx-xx-xx-xx
Possible value:
<mac> : set up the MAC format: xx-xx-xx-xx-xx-xx
Example:

```
SNMP-24MGB(mac-alias)# set 23-56-r5-55-3f-03 test3
SNMP-24MGB(mac-alias)# show
MAC Alias
  No           MAC               Alias
========================================
    1    23-56-00-55-3F-03   test3
    2    23-56-00-55-EF-03   test13
    3    23-56-00-55-EF-33   test1

SNMP-24MGB(mac-alias)# del 23-56-00-55-3F-03
SNMP-24MGB(mac-alias)# show
MAC Alias
  No           MAC               Alias
========================================
    1    23-56-00-55-EF-03   test13
    2    23-56-00-55-EF-33   test1
```

set

Syntax:

set <mac> < alias>

Description:

To set mac alias entry.

Argument:

<mac> : mac address, xx-xx-xx-xx-xx-xx

<alias> : mac alias name, max 15 characters

Possible value:

<mac> : set up the MAC format: xx-xx-xx-xx-xx-xx

<alias> : mac alias name, max 15 characters

Example:

```
SNMP-24MGB(mac-alias)# set 23-56-r5-55-3f-03 test3
SNMP-24MGB(mac-alias)# show
MAC Alias
```

```
  No           MAC               Alias
=========================================
    1    23-56-00-55-3F-03   test3
    2    23-56-00-55-EF-03   test13
    3    23-56-00-55-EF-33   test1
```

show

Syntax:

show

Description:

To display mac alias entry.

Argument:

None

Possible value:

none

Example:

```
SNMP-24MGB(mac-alias)# show
MAC Alias
  No           MAC               Alias
=========================================
    1    23-56-00-55-3F-03   test3
    2    23-56-00-55-EF-03   test13
    3    23-56-00-55-EF-33   test1
```

<<mac-table>>

flush

Syntax:

flush

Description:

To del dynamic mac entry.

Argument:

none

Possible value:

none

Example:

```
SNMP-24MGB(mac-mac-table)# flush
SNMP-24MGB(mac-mac-table)# show

 No    Type   VLAN         MAC                       Port Members
------------------------------------------------------------------------
 1  Static     1 FF-FF-FF-FF-FF-FF 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,1
                                   8,19,20,21,22,23,24,
```

show

Syntax:

show

Description:

To show all mac table informaion.

Argument:

none

Possible value:

none

Example:

```
SNMP-24MGB(mac-mac-table)# show

 No    Type   VLAN         MAC                       Port Members
------------------------------------------------------------------------
   1  Static     1 FF-FF-FF-FF-FF-FF 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,1
                                   8,19,20,21,22,23,24,
```

<<maintenance>>

set age-time

Syntax:

set age-time <#>

Description:

To set mac table age out time of dynamic learning mac.

Argument:

<#>: age-timer in seconds, 0, 10 1000000. The value zero disables aging

Possible value:

<#>: 0, 10 to 1000000.

Example:

```
SNMP-24MGB(mac-table-maintain)# set age-time 300
SNMP-24MGB(mac-maintenance)# show
E api_ai 26/vtss_

Aging Configuration:      Enter into sta
Age time: 300mode

MAC Table Learning
Port    Learning Mode-<< Global commands >
  2         Auto
  3         Auto
  4         Auto
  5         Auto
  6         Auto
  7         Auto
  8         Auto
  9         Auto
 10         Auto
 11         Auto
 12         Auto
 13         Auto
 14         Auto
 15         Auto
```

```
16          Auto
17          Auto
18          Auto
19          Auto
20          Auto
21          Auto
22          Auto
23          Auto
24          Auto
```

set learning

Syntax:

set learning <range> <auto|disable|secure>

Description:

To set mac table learning.

Argument:

<range syntax> : 1,5-7, available from 1 to 24

<auto >: auto learning

<disable >: disable learning

<secure >: learn frames are discarded

Possible value:

<range syntax> : 1,5-7, available from 1 to 24

<auto >: auto learning

<disable >: disable learning

<secure >: learn frames are discarded.

Example:

```
SNMP-24MGB(mac-table-maintain)# set learning 1-24 auto
SNMP-24MGB(mac-maintenance)# show
E api_ai 26/vtss_

Aging Configuration:      Enter into sta
Age time: 300mode
```

```
MAC Table Learning
Port    Learning Mode-<< Global commands >
  2         Auto
  3         Auto
  4         Auto
  5         Auto
  6         Auto
  7         Auto
  8         Auto
  9         Auto
 10         Auto
 11         Auto
 12         Auto
 13         Auto
 14         Auto
 15         Auto
 16         Auto
 17         Auto
 18         Auto
 19         Auto
 20         Auto
 21         Auto
 22         Auto
 23         Auto
 24         Auto
```

show

Syntax:

show

Description:

To display mac table maintenance

Argument:

Noneq

Possible value:

None

Example:

```
SNMP-24MGB(mac-maintenance)# show
   1  Static

Aging Configuration:FF 1,2,3,4,5,6,7,8,9
Age time: 3004,15,16,17,1

MAC Table Learning
Port    Learning Mode
  2         Auto
  3         Auto
  4         Auto
  5         Auto
  6         Auto
  7         Auto
  8         Auto
  9         Auto
 10         Auto
 11         Auto
 12         Auto
 13         Auto
 14         Auto
 15         Auto
 16         Auto
 17         Auto
 18         Auto
 19         Auto
 20         Auto
 21         Auto
 22         Auto
 23         Auto
 24         Auto
```

<<static-mac>>

add

Syntax:

add <mac> <port> <vid> [alias]

Description:

To add the static mac entry.

Argument:

<mac> : mac address, format: 00-02-03-04-05-06

<port> : 0-24. The value “0” means this entry is filtering entry

<vid> : vlan id. 0, 1-4094. VID must be zero if vlan mode is not tag-based

[alias] : mac alias name, max. 15 characters

Possible value:

<mac> : mac address

<port> : 0-24

<vid> : 0, 1-4094

[alias] : mac alias name

Example:

```
SNMP-24MGB(mac-static-mac)# add 00-02-03-04-05-06 3 0 aaa
SNMP-24MGB(mac-static-mac)#
```

del

Syntax:

del <mac> <vid>

Description:

To del the static mac entry.

Argument:

<mac> : mac address, format: 00-02-03-04-05-06

<vid> : vlan id. 0, 1-4094. VID must be zero if vlan mode is not tag-based

Possible value:

<mac> : mac address

<vid> : 0, 1-4094

Example:

```
SNMP-24MGB(mac-static-mac)# del 00-02-03-04-05-06 0
SNMP-24MGB(mac-static-mac)#
```

show filter

Syntax:

show filter

Description:

To display the static filtering mac entry.

Argument:

None

Possible value:

None

Example:

```
SNMP-24MGB(mac-static-mac)# show filter
Static Filtering Etnry: (Total 1 item(s))
1)  mac: 00-33-03-04-05-06, vid:     -, alias: ccc
SNMP-24MGB(mac-static-mac)#
```

show forward

Syntax:

show forward

Description:

To display the static forwarding mac entry.

Argument:

None

Possible value:

None

Example:

```
SNMP-24MGB(mac-static-mac)# show forward
Static Forwarding Etnry: (Total 1 item(s))
1)  mac: 00-02-03-04-05-06, port:  3, vid:    -, alias: aaa
SNMP-24MGB(mac-static-mac)#
```

● mirror

set mirror

Syntax:

set mirror < #>

Description:

To set mirror port and enable/disable mirror function

Argument:

<#>: port, available from 1 to 24 and 0.

1 to 24: available port number

0: disable mirror function

Possible value:

<#>: 1 to 24

Example:

```
SNMP-24MGB(mirror)# set mirror 2
```

set monitor-destination

Syntax:

set monitor-destination <range>

Description:

To set monitor destination port. The packets sent by this port will be copied to the

monitoring port.

Argument:

<range>: the port that is chosen for monitored port of the mirror function, syntax 1,5-7, available from 1 to 24

Possible value:

<range>: 1 to 24

Example:

```
SNMP-24MGB(mirror)# set monitor-destination 2-15
SNMP-24MGB(mirror)# show

  2                               V
  3                               V
  4                               V
  5                               V
  6                               V
  7                               V
  8                               V
  9                               V
 10                               V
 11                               V
 12                               V
 13                               V
 14                               V
 15                               V
 16
 17
 18
```

set monitor-source

Syntax:

set monitor-source <range>

Description:

To set up the monitoring port of the mirror function. User can observe the packets that the monitored port received via this port.

Argument:

<range>: the monitoring port that is chosen for the mirror function. Only one port is allowed to configure, available from 1 to 24

Possible value:

<range>:1 to 24

Example:

```
SNMP-24MGB(mirror)# set monitor-source 18
SNMP-24MGB(mirror)# show

Port to mirror to: 1

Port    Source Enable    Destination Enable
  2                            V
  3                            V
  4                            V
  5                            V
  6                            V
  7                            V
  8                            V
  9                            V
 10                            V
 11                            V
 12                            V
 13                            V
 14                            V
 15                            V
 16
 17
 18           V
 19
 20
 21
```

```
  22
  23
  24
SNMP-24MGB(mirror)#
```

show

Syntax:

show

Description:

To display the setting status of mirror configuration.

Argument:

None

Possible value:

None

Example:

```
SNMP-24MGB(mirror)# show
Port to mirror to: 1


Port    Source Enable    Destination Enable
  2                            V
  3                            V
  4                            V
  5                            V
  6                            V
  7                            V
  8                            V
  9                            V
 10                            V
 11                            V
 12                            V
 13                            V
```

```
    14                                  V
    15                                  V
    16
    17
    18              V
    19
    20
    21
    22
    23
    24
  SNMP-24MGB(mirror)#
```

- **mstp**

disable

Syntax:
disable
Description:
To disable mstp function.
Argument:
None
Possible value:
None
Example:

```
  SNMP-24MGB(mstp)# disable
```

enable

Syntax:
enable

Description:

To enable mstp function.

Argument:

None

Possible value:

None

Example:

```
SNMP-24MGB(mstp)# enable
```

migrate-check

Syntax:

migrate-check <port-range>

Description:

To force the port to transmit RST BPDUs.

Argument:

Usage: migrate-check <port range>

port range syntax: 1,5-7, available from 1 to 24

Possible value:

Usage: migrate-check <port range>

port range syntax: 1,5-7, available from 1 to 24

Example:

```
SNMP-24MGB(mstp)# migrate-check 1-2
```

set config

Syntax:

set config <Max Age><Forward Delay><Max Hops>

Description:

To set max age,forward delay,max hops.

Argument:

<Max Age> : available from 6 to 40. Recommended value is 20
<Forward Delay(sec)> : available from 4 to 30. Recommended value is 15
<Max Hops> : available from 6 to 40. Recommended value is 20
Possible value:
<Max Age> : available from 6 to 40. Recommended value is 20
<Forward Delay(sec)> : available from 4 to 30. Recommended value is 15
<Max Hops> : available from 6 to 40. Recommended value is 20
Example:

```
SNMP-24MGB(mstp)# set config 20 15 20
SNMP-24MGB(mstp)#
```

set msti-vlan

Syntax:
set msti-vlan <instance-id><vid-string>
Description:
To map Vlan ID(s) to an MSTI
Argument:
<instance-id> : MSTI id available from 1 to 4095
<vid-string> : syntax example: 2.5-7.100-200
Possible value:
<instance-id> : available from 1 to 4094
Example:

```
SNMP-24MGB(mstp)# set msti-vlan 2 2.5
msti 2 had been successfully created and(or)
vlan(s) have been added to map to this msti.
SNMP-24MGB(mstp)#
```

set p-cost

Syntax:
set p-cost <instance_id> <port range> <path cost>

Description:

To set port path cost per instance

Argument:

<port range> syntax: 1,5-7, available from 1 to 24

<path cost> : 0, 1-200000000. The value zero means auto status

Possible value:

<port range> : available from 1 to 24

<path cost> : The value zero means auto status, 0-2000000000

Example:

```
SNMP-24MGB(mstp)# set p-cost 2 8-10 0
SNMP-24MGB(mstp)#
```

set p-edge

Syntax:

set p-edge <port range> <admin edge>

Description:

To set per port admin edge

Argument:

<port range> syntax: 1,5-7, available from 1 to 24

<admin edge> : 0->non-edge port,1->edge ports

Possible value:

<port range> syntax: 1,5-7, available from 1 to 24

<admin edge> : 0->non-edge port,1->edge ports

Example:

```
SNMP-24MGB(mstp)# set p-edge 10-12 0
SNMP-24MGB(mstp)#
```

set p-hello

Syntax:

set p-hello <port range> <hello time>

Description:

To set per port hello time

Argument:

<port range> : syntax: 1,5-7, available from 1 to 24

<hello time> : only 1~2 are valid values

Possible value:

<port range> : syntax: 1,5-7, available from 1 to 24

<hello time> : only 1~2 are valid values

Example:

```
SNMP-24MGB(mstp)# set p-hello 5-10 1
SNMP-24MGB(mstp)#
```

set p-p2p

Syntax:

set p-p2p <port range> <admin p2p>

Description:

To set per port admin p2p

Argument:

<port range> syntax: 1,5-7, available from 1 to 24

<admin p2p> : Admin point to point, <auto|true|false>

Possible value:

<port range> syntax: 1,5-7, available from 1 to 24

<admin p2p> : Admin point to point, <auto|true|false>

Example:

```
SNMP-24MGB(mstp)# set p-p2p 8-10 auto
SNMP-24MGB(mstp)#
```

set priority

Syntax:

set priority <instance-id><Instance Priority>

Description:

To set instance priority

Argument:

<instance-id> : 0->CIST; 1-4095->MSTI

<Instance Priority> : must be a multiple of 4096,available from 0 to 61440

Possible value:

<instance-id> : 0->CIST; 1-4095->MSTI

<Instance Priority> : 0 to 61440

Example:

```
SNMP-24MGB(mstp)# set priority 0 4096
SNMP-24MGB(mstp)# enable
MSTP started
SNMP-24MGB(mstp)# show instance 0
mstp status : enabled
force version : 3
instance id: 0
bridge max age : 20
bridge forward delay : 15
bridge max hops : 20
instance priority : 4096
bridge mac : 00:40:c7:5e:00:09
CIST ROOT PRIORITY : 4096
CIST ROOT MAC : 00:40:c7:5e:00:09
CIST EXTERNAL ROOT PATH COST : 0
CIST ROOT PORT ID : 0
CIST REGIONAL ROOT PRIORITY : 4096
CIST REGIONAL ROOT MAC : 00:40:c7:5e:00:09
CIST INTERNAL  ROOT PATH COST : 0
CIST CURRENT MAX AGE : 20
CIST CURRENT FORWARD DELAY : 15
TIME SINCE LAST TOPOLOGY CHANGE(SECs) : 2
TOPOLOGY CHANGE COUNT(SECs) : 0
SNMP-24MGB(mstp)#
```

set r-role

Syntax:

set r-role <port range> <restricted role>

Description:

To set per port restricted role

Argument:

<port range> syntax: 1,5-7, available from 1 to 24

<restricted role> : 0->false,1->True

Possible value:

<port range> : 1 to 24

<restricted role> : 0->false,1->True

Example:

```
SNMP-24MGB(mstp)# set r-role 8-12 1
SNMP-24MGB(mstp)# set r-role 13-16 0
SNMP-24MGB(mstp)# show ports 0
==== =========== ====== ========= ===== ===== ==Operational== =Restricted=
Port Port Status  Role  Path Cost  Pri  Hello Edge-Port  P2P   Role   Tcn
==== =========== ====== ========= ===== ===== ========= ===== ====== =====
  1   FORWARDING  DSGN     200000  128   2/2             V
  2   DISCARDING  dsbl    2000000  128   2/2       V
  3   DISCARDING  dsbl    2000000  128   2/2       V
  4   DISCARDING  dsbl    2000000  128   2/2       V
  5   FORWARDING  DSGN     200000  128   2/2       V       V
  6   DISCARDING  dsbl    2000000  128   2/2       V
  7   FORWARDING  DSGN      20000  128   2/2       V       V
  8   DISCARDING  dsbl    2000000  128   2/2       V             V
  9   DISCARDING  dsbl    2000000  128   2/2       V             V
 10   DISCARDING  dsbl    2000000  128   2/2       V             V
 11   DISCARDING  dsbl    2000000  128   2/2       V             V
 12   DISCARDING  dsbl    2000000  128   2/2       V             V
 13   DISCARDING  dsbl    2000000  128   2/2       V
 14   DISCARDING  dsbl    2000000  128   2/2       V
 15   DISCARDING  dsbl    2000000  128   2/2       V
```

```
 16   DISCARDING  dsbl    2000000  128   2/2      V
 17   DISCARDING  dsbl    2000000  128   2/2      V
 18   DISCARDING  dsbl    2000000  128   2/2      V
 19   DISCARDING  dsbl    2000000  128   2/2      V
 20   DISCARDING  dsbl    2000000  128   2/2      V
 21   DISCARDING  dsbl    2000000  128   2/2      V
 22   DISCARDING  dsbl    2000000  128   2/2      V
 23   DISCARDING  dsbl    2000000  128   2/2      V
 24   DISCARDING  dsbl    2000000  128   2/2      V
SNMP-24MGB(mstp)#
```

set r-tcn

Syntax:

set r-tcn <port range> <restricted tcn>

Description:

To set per port restricted tcn

Argument:

<port range> syntax: 1,5-7, available from 1 to 24

<restricted tcn> : 0->false,1->True

Possible value:

<port range> : 1 to 24

<restricted tcn> : 0->false,1->True

Example:

```
SNMP-24MGB(mstp)# set r-tcn 9-10 1
SNMP-24MGB(mstp)# set r-tcn 14-20 1
SNMP-24MGB(mstp)# show pconf 0
Port Path Cost Priority Hello Edge-Port   P2P   Role   Tcn
  system               Enter in
==== ========= ======== ===== =========  ===== ====== =====...(q to quit)
  2          0    128     2      true     auto  false false
  3          0    128     2      true     auto  false  true
  4          0    128     2      true     auto  false  true
```

```
  5          0    128     2      true     auto  false false
  6          0    128     2      true     auto  false false
  7          0    128     2      true     auto  false false
  8          0    128     2      true     auto   true false
  9          0    128     2      true     auto   true  true
 10          0    128     2      true     auto   true  true
 11          0    128     2      true     auto   true false
 12          0    128     2      true     auto   true false
 13          0    128     2      true     auto  false false
 14          0    128     2      true     auto  false  true
 15          0    128     2      true     auto  false  true
 16          0    128     2      true     auto  false  true
 17          0    128     2      true     auto   true  true
 18          0    128     2      true     auto   true  true
 19          0    128     2      true     auto   true  true
 20          0    128     2      true     auto   true  true
 21          0    128     2      true     auto   true false
 22          0    128     2      true     auto   true false
 23          0    128     2      true     auto   true false
 24          0    128     2      true     auto   true false
SNMP-24MGB(mstp)#
```

set region-name

Syntax:

set region-name <string>

Description:

To set mstp region name(0~32 bytes)

Argument:

<string> :a null region name

Possible value:

<string> :1-32

Example:

```
SNMP-24MGB(mstp)# set region-name test2
SNMP-24MGB(mstp)# show region-info

Name : test2
Revision : 0
Instances :  0
SNMP-24MGB(mstp)#
```

set revision-level

Syntax:

set rev <revision-level>

Description:

To set mstp revision-level(0~65535)

Argument:

<revision-level> :0~65535

Possible value:

<revision-level> :0~65535

Example:

```
SNMP-24MGB(mstp)# set revision-level 30000
SNMP-24MGB(mstp)# show region-info

Name : test2
Revision : 30000
Instances :  0
SNMP-24MGB(mstp)#
```

set version

Syntax:

set version <stp|rstp|mstp>

Description:

To set force-version

Argument:

<revision-level> :0~65535

Possible value:

<revision-level> :0~65535

Example:

```
SNMP-24MGB(mstp)# set version mstp
```

show instance

Syntax:

show instance <instance-id>

Description:

To show instance status

Argument:

<instance-id> :0->CIST;1-4095->MSTI

Possible value:

<instance-id> :0->CIST;1-4095->MSTI

Example:

```
SNMP-24MGB(mstp)# show instance 0
mstp status : enabled
force version : 2
instance id: 0
bridge max age : 20
bridge forward delay : 15
bridge max hops : 20
instance priority : 4096
bridge mac : 00:40:c7:5e:00:09
CIST ROOT PRIORITY : 4096
CIST ROOT MAC : 00:40:c7:5e:00:09
CIST EXTERNAL ROOT PATH COST : 0
CIST ROOT PORT ID : 0
CIST REGIONAL ROOT PRIORITY : 4096
CIST REGIONAL ROOT MAC : 00:40:c7:5e:00:09
```

```
CIST INTERNAL  ROOT PATH COST : 0
CIST CURRENT MAX AGE : 20
CIST CURRENT FORWARD DELAY : 15
TIME SINCE LAST TOPOLOGY CHANGE(SECs) : 2569
TOPOLOGY CHANGE COUNT(SECs) : 0
SNMP-24MGB(mstp)#
```

show pconf

Syntax:

show pconf <instance-id>

Description:

To show port configuration

Argument:

instance-id:0->CIST;1-4095->MSTI

Possible value:

<instance-id> :0->CIST;1-4095->MSTI

Example:

```
SNMP-24MGB(mstp)# show pconf 0
  set r-role           Se
  2          0    128     2      true     auto  false false
  3          0    128     2      true     auto  false  true
  4          0    128     2      true     auto  false  true
  5          0    128     2      true     auto  false false
  6          0    128     2      true     auto  false false
  7          0    128     2      true     auto  false false
  8          0    128     2      true     auto   true false
  9          0    128     2      true     auto   true  true
 10          0    128     2      true     auto   true  true
 11          0    128     2      true     auto   true false
 12          0    128     2      true     auto   true false
 13          0    128     2      true     auto  false false
 14          0    128     2      true     auto  false  true
```

```
15          0    128     2      true     auto  false  true
16          0    128     2      true     auto  false  true
17          0    128     2      true     auto   true  true
18          0    128     2      true     auto   true  true
19          0    128     2      true     auto   true  true
20          0    128     2      true     auto   true  true
21          0    128     2      true     auto   true false
22          0    128     2      true     auto   true false
23          0    128     2      true     auto   true false
24          0    128     2      true     auto   true false
SNMP-24MGB(mstp)#
```

show ports

Syntax:

show ports <instance-id>

Description:

To show port status

Argument:

instance-id:0->CIST;1-4095->MSTI

Possible value:

<instance-id> :0->CIST;1-4095->MSTI

Example:

```
SNMP-24MGB(mstp)# show ports 0
```

show region-info

Syntax:

show region-info

Description:

To show region config

Argument:

none

Possible value:

none

Example:

```
SNMP-24MGB(mstp)# show region-info

Name : test2
Revision : 30000
Instances :  0
SNMP-24MGB(mstp)#
```

show vlan-map

Syntax:

show vlan-map <instance-id>

Description:

To show vlan mapping of an instance

Argument:

<nstance-id> :0->CIST;1-4095->MSTI

Possible value:

<instance-id> :0->CIST;1-4095->MSTI

Example:

```
SNMP-24MGB(mstp)# show  vlan-map 0
instance 0 has those vlans :
0-4095
SNMP-24MGB(mstp)#
```

● policy

add

Syntax:

add [name <value>] [ip <value>] [port <value>] [type <value>] action <value>

Description:

To add a new management policy entry.

Argument:

Synopsis: add name George ip 192.168.1.1-192.168.1.90 port 2-5,8
type h,s action a

Synopsis: add name Mary ip 192.168.2.1-192.168.2.90 action deny

Possible value:

None

Example:

```
SNMP-24MGB(policy)# add name Mary ip 192.168.3.1-192.168.3.4 action deny
SNMP-24MGB(policy)# show
 1) Name   : george          IP Range    : 192.168.1.1-192.168.1.90
    Action : Accept          Access Type : HTTP SNMP
    Port   : 2 3 4 5 8

 2) Name   : rule1           IP Range    : 192.168.2.1-192.168.2.30
    Action : Deny            Access Type : HTTP TELENT SNMP
    Port   : 11 12 13 14 15

 3) Name   : Mary            IP Range    : 192.168.3.1-192.168.3.4
    Action : Deny            Access Type : Any
    Port   : Any

SNMP-24MGB(policy)#
```

delete

Syntax:

delete <index>

Description:

To add a new management policy entry.

Argument:

<index> : a specific or range management policy entry(s)

e.g. delete 2,3,8-12

Possible value:

<index> : a specific or range management policy entry(s)

Example:

```
SNMP-24MGB(policy)# add name rule2 ip 192.168.4.23-192.168.4.33 port 6-8 type s,t
action d
SNMP-24MGB(policy)# show
 1) Name   : rule1            IP Range    : 192.168.4.5-192.168.4.22
    Action : Deny             Access Type : HTTP TELENT SNMP
    Port   : 2 3 4 5

 2) Name   : rule2            IP Range    : 192.168.4.23-192.168.4.33
    Action : Deny             Access Type : TELENT SNMP
    Port   : 6 7 8

SNMP-24MGB(policy)# delete 2
SNMP-24MGB(policy)# show
 1) Name   : rule1            IP Range    : 192.168.4.5-192.168.4.22
    Action : Deny             Access Type : HTTP TELENT SNMP
    Port   : 2 3 4 5

SNMP-24MGB(policy)#
```

show

Syntax:

show

Description:

To show management policy list.

Argument:

none

Possible value:

none

Example:

```
SNMP-24MGB(policy)# show
 1) Name   : rule1           IP Range    : 192.168.4.5-192.168.4.22
    Action : Deny            Access Type : HTTP TELENT SNMP
    Port   : 2 3 4 5

 2) Name   : rule2           IP Range    : 192.168.4.23-192.168.4.33
    Action : Deny            Access Type : TELENT SNMP
    Port   : 6 7 8
```

- **port**

clear counter

Syntax:

clear counter

Description:

To clear all ports' counter (include simple and detail port counter) information.

Argument:

None

Possible value:

None

Example:

```
SNMP-24MGB(port)# clear counter
```

set description

Syntax:

set description <port-range> <description>

Description:

To set port description

Argument:

<port range> syntax : 1,5-7, available from 1 to 24

<description> : set port description, max 47 characters

Possible value:

<port range> : 1 to 24

<description> : max 47 characters

Example:

```
SNMP-24MGB(port)# set description 3-8 salesdepartment
SNMP-24MGB(port)# show config
      Speed/    Flow    Maximum ExcessiveSynopsis: add name George ip 192.168.1.1-
Port  Duplex   Control   Frame  Collision  Description
  type
  2  Auto      Disabled  9600    Discard
  3  Auto      Disabled  9600    Discard  salesdepartment
  4  Auto      Disabled  9600    Discard  salesdepartment
  5  Auto      Disabled  9600    Discard  salesdepartment
  6  Auto      Disabled  9600    Discard  salesdepartment
  7  Auto      Disabled  9600    Discard  salesdepartment
  8  Auto      Disabled  9600    Discard  salesdepartment
  9  Auto      Disabled  9600    Discard
```

set excessive-collision

Syntax:

set excessive-collision <port-range> <discard|restart>

Description:

To set port description

Argument:

<port range> syntax : 1,5-7, available from 1 to 24

Possible value:

<port range> : 1 to 24

Example:

```
SNMP-24MGB(port)# set excessive-collision 6-10 restart
```

```
SNMP-24MGB(port)# show config
      Speed/    Flow    Maximum Excessive
Port  Duplex   Control   Frame  Collision  Description a list of previously run command  set
priority
---- --------- -------- ------- --------- -------------------------------DISCAR
  2  Auto      Disabled  9600    Discard
  3  Auto      Disabled  9600    Discard  salesdepartment
  4  Auto      Disabled  9600    Discard  salesdepartment
  5  Auto      Disabled  9600    Discard  salesdepartment
  6  Auto      Disabled  9600    Restart  salesdepartment
  7  Auto      Disabled  9600    Restart  salesdepartment
  8  Auto      Disabled  9600    Restart  salesdepartment
  9  Auto      Disabled  9600    Restart
 10  Auto      Disabled  9600    Restart
 11  Auto      Disabled  9600    Discard
```

set flow-control

Syntax:

set flow-control <port-range> <enable|disable>

Description:

To set per-port flow control

Argument:

<port-range>: syntax 1,5-7, available from 1 to 24

Possible value:

<port-range>: 1 ~ 24

Example:

```
SNMP-24MGB(port)# set flow-control 3-10
SNMP-24MGB(port)# show config
1  Auto      Disabled  9600    Doscard
2  Auto      Disabled  9600    Discard
  3  Auto      Enabled   9600    Discard  salesdepartment
  4  Auto      Enabled   9600    Discard  salesdepartment
  5  Auto      Enabled   9600    Discard  salesdepartment
```

```
 6  Auto      Enabled   9600    Restart  salesdepartment
 7  Auto      Enabled   9600    Restart  salesdepartment
 8  Auto      Enabled   9600    Restart  salesdepartment
 9  Auto      Enabled   9600    Restart
10  Auto      Enabled   9600    Restart
11  Auto      Disabled  9600    Discard
12  Auto      Disabled  9600    Discard
```

set max-frame

Syntax:

set max-frame <port-range> <value>

Description:

To set per-port maximum frame size

Argument:

<port range> syntax : 1,5-7, available from 1 to 24

<value> : Allowed value are 1518-9600 bytes.

Possible value:

<port range> syntax : 1 to 24

<value> : 1518-9600 bytes.

Example:

```
SNMP-24MGB(port)# set max-frame 3-6 1518
SNMP-24MGB(port)# show config

     Speed/    Flow    Maximum Excessiveommands
 2  Auto      Disabled  9600    Discard
 3  Auto      Enabled   1518    Discard  salesdepartment
 4  Auto      Enabled   1518    Discard  salesdepartment
 5  Auto      Enabled   1518    Discard  salesdepartment
 6  Auto      Enabled   1518    Restart  salesdepartment
 7  Auto      Enabled   9600    Restart  salesdepartment
 8  Auto      Enabled   9600    Restart  salesdepartment
 9  Auto      Enabled   9600    Restart
```

```
 10  Auto      Enabled   9600    Restart
 11  Auto      Disabled  9600    Discard
```

set speed

Syntax:

set speed <port-range> <disable|auto|1Gfull|100full|100half|10full|10half

Description:

To set port capability.

Argument:

<port-range>:syntax 1,5-7, available from 1 to 24

<port-speed>:

auto: set auto-negotiation mode

10half: set speed/duplex 10M Half

10full: set speed/duplex 10M Full

100half: set speed/duplex 100M Half

100full: set speed/duplex 100M Full

1Gfull: set speed/duplex 1G Full

Possible value:

<port-range>: 1 to 24

<port-speed>: auto, 10half, 10full, 100half, 100full, 1Gfull

Example:

```
SNMP-24MGB(port)# set speed 3 auto
SNMP-24MGB(port)# show status
           Speed/
Port Link  Duplex   Rx Pause Tx Pause    Description
---- ---- --------- -------- -------- --------------------------------
  1  Up   100M/Full Disabled Disabled
  2  Down Down      Disabled Disabled
  3  Up   100M/Full Disabled Disabled
  4  Down Down      Disabled Disabled
  5  Down Down      Disabled Disabled
  6  Down Down      Disabled Disabled
```

```
7  Up   1G/Full   Disabled Disabled
8  Down Down      Disabled Disabled
9  Down Down      Disabled Disabled
```

set powersaving

Syntax:

set set powersaving <port> <0|1>

Description:

To set power saving.

Argument:

port: 1,5-7, available from 1 to 8

0: Disable, 1: Enable

Possible value:

<port-index>: 1 to 16

<power saving>:0: Disable, 1: Enable

Example:

```
SNMP-24MGB(port)# set powersaving 2 1
SNMP-24MGB (port)#
```

show config

Syntax:

show config

Description:

To display the each port's configuration information.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB(port)# show config
      Speed/    Flow    Maximum Excessive
Port  Duplex   Control   Frame  Collision  Description
---- --------- -------- ------- --------- --------------------------------
  1  Auto      Disabled  9600    Discard
  2  1G/Full   Disabled  9600    Discard
  3  Auto      Disabled  9600    Discard
  4  1G/Full   Disabled  9600    Discard
  5  1G/Full   Disabled  9600    Discard
  6  Auto      Disabled  9600    Discard
  7  Auto      Disabled  9600    Discard
  8  Auto      Disabled  9600    Discard
  9  Auto      Disabled  9600    Discard
 10  Auto      Disabled  9600    Discard
 11  Auto      Disabled  9600    Discard
 12  Auto      Disabled  9600    Discard
```

show detail-counter

Syntax:

show detail-counter <port>

Description:

To display the display detail port counter.

Argument:

<port>: port, available from 1 to 24

Possible value:

<port>:1 ~ 24

Example:

```
SNMP-24MGB(port)# show detail-counter 3

Rx Multicast              6    Tx Multicast                  641
Rx Broadcast             94    Tx Broadcast                 5251
Rx Pause                  0    Tx Pause                        0
```

```
   Receive Size Counters                Transmit Size Counters
------------------------------    ----------------------------------
Rx 64 Bytes             7381    Tx 64 Bytes                    4351
Rx 65-127 Bytes          291    Tx 65-127 Bytes                2342
Rx 128-255 Bytes         118    Tx 128-255 Bytes                605
Rx 256-511 Bytes          53    Tx 256-511 Bytes               1081
Rx 512-1023 Bytes         33    Tx 512-1023 Bytes               144
Rx 1024-1526 Bytes        28    Tx 1024-1526 Bytes            11453
Rx 1527- Bytes             0    Tx 1527- Bytes                    0

    Receive Error Counters            Transmit Error Counters
---------------------------    ----------------------------------
Rx Drops                   0    Tx Drops                          0
Rx CRC/Alignment           0    Tx Late/Exc. Coll.                0
Rx Undersize               0
Rx Oversize                0
Rx Fragments               0
Rx Jabber                  0
```

show sfp

Syntax:

show sfp <port>

Description:

To display the SFP module information.

Argument:

<port>: SFP port of the switch, available from 1to 24

Possible value:

<port>: 1- 24,

Example:

```
SNMP-24MGB(port)# show sfp 11
Port 11 SFP information
```

```
------------------------------------------------------------------
Connector Type        : SFP - Unknown or unspecified
Fiber Type            : Reserved
Tx Central Wavelength : 0
Baud Rate             : 1G
Vendor OUI            : 00:00:00
Vendor Name           : FIBERXON INC.
Vendor PN             : FTM-C012R-LC
Vendor Rev            : 10
Vendor SN             : PP220052901281
Date Code             : 051012
Temperature           : none
Vcc                   : none
Mon1 (Bias) mA        : none
Mon2 (TX PWR)         : none
Mon3 (RX PWR)         : none
SNMP-24MGB(port)#
Port 23 SFP information
------------------------------------------------------------------
Connector Type        : SFP - LC
Fiber Type            : Multi-mode (MM)
Tx Central Wavelength : 850
Baud Rate             : 1G
Vendor OUI            : 00:40:c7
Vendor Name           : APAC Opto
Vendor PN             : KM28-C3S-TC-N
Vendor Rev            : 0000
Vendor SN             : 5425010708
Date Code             : 050530
Temperature           : none
Vcc                   : none
Mon1 (Bias) mA        : none
Mon2 (TX PWR)         : none
Mon3 (RX PWR)         : none
```

show simple-counter

Syntax:

show simple-counter

Description:

To display the summary counting of each port's traffic.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB(port)# show simple-counter
set max-frame        Set per-port maximum frame size


 13      0       0      0       0       0       0       0       0
 14     0       0      0       0       0       0       0       0
 15     0       0      0       0       0       0       0       0
 16     0       0      0       0       0       0       0       0
 17     0       0      0       0       0       0       0       0
 18     0       0      0       0       0       0       0       0
 19     0       0      0       0       0       0       0       0
 20     0       0      0       0       0       0       0       0
 21     0       0      0       0       0       0       0       0
 22     0       0      0       0       0       0       0       0
 23     0       0      0       0       0       0       0       0
 24      0       0      0       0       0       0       0       0


SNMP-24MGB(port)#
```

show status

Syntax:

show status

Description:

To display the port's current status.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB(port)# show status
           Speed/1G/Full   Disable
Port Link  Duplex   Rx Pause Tx Pause    Description
  3  Auto      Disabled  9600    Discard
  2  Down Down      Disabled Disabled
  3  Up   100M/Full Disabled Disabled
  4  Down Down      Disabled Disabled
  5  Down Down      Disabled Disabled
  6  Down Down      Disabled Disabled
  7  Up   1G/Full   Disabled Disabled
  ……
SNMP-24MGB(port)#
```

show Powersaving

Syntax:

show powersaving

Description:

To display the port's powersaving status.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB(port)# show powersaving
Port Power Saving
---- ------------
  1    Disabled
  2    Disabled
  3    Disabled
  4    Disabled
  5    Disabled
  6    Disabled
  7    Disabled
  8    Disabled
SNMP-24MGB(port)#
```

- **qos**

<<ports>>

set class

Syntax:

set class <#>

Description:

To set number of classes.

Argument:

#: Number of classes, available 1, 2, 4

Possible value:

<#>: 1,2,4

Example:

```
SNMP-24MGB (qos-ports)# set class 2
SNMP-24MGB (qos-ports)#
```

set port

Syntax:

set port <range> <default class> <qcl> <user priority> <queuing mode> <lo
w queue weighted> <normal queue weighted> <medium queue weighted> <high queue we
ighted>

Description:

To set port information.

Argument:

<range syntax>: 1,5-7, available from 1 to 24

<default class option>: low | normal | medium | high

<qcl> : available from 1 to 24

<user priority>: available from 0 to 7

<queuing mode>: strict | weighted

<low queue weighted>: 1 / 2 / 4 / 8

<normal queue weighted>: 1 / 2 / 4 / 8

<medium queue weighted> : 1 / 2 / 4 / 8

<high queue weighted>: 1 / 2 / 4 / 8

Possible value:

<range syntax>: 1 to 24

<default class option>: low | normal | medium | high

<qcl> : 1 to 24

<user priority>: 0 to 7

<queuing mode>: strict | weighted

<low queue weighted>: 1 / 2 / 4 / 8

<normal queue weighted>: 1 / 2 / 4 / 8

<medium queue weighted> : 1 / 2 / 4 / 8

<high queue weighted>: 1 / 2 / 4 / 8

Example:

```
SNMP-24MGB(qos-ports)# set port 2 medium 1 3 weithted 2 2 2 2
SNMP-24MGB(qos-ports)# show
  2  Medium       1         3       Weighted Fair     2 /   2  /   2  /  2
  3   Low       1         0       Strict Priority   1 /   2  /   4  /  8
  4   Low       1         0       Strict Priority   1 /   2  /   4  /  8
```

```
  5  Low       1         0       Strict Priority   1 /   2 /   4 /  8
  6  Low       1         0       Strict Priority   1 /   2 /   4 /  8
  7  Low       1         0       Strict Priority   1 /   2 /   4 /  8
  8  Low       1         0       Strict Priority   1 /   2 /   4 /  8
  9  Low       1         0       Strict Priority   1 /   2 /   4 /  8
 10  Low       1         0       Strict Priority   1 /   2 /   4 /  8
 11  Low       1         0       Strict Priority   1 /   2 /   4 /  8
 12  Low       1         0       Strict Priority   1 /   2 /   4 /  8
 13  Low       1         0       Strict Priority   1 /   2 /   4 /  8
 14  Low       1         0       Strict Priority   1 /   2 /   4 /  8
 .........
SNMP-24MGB(qos-ports)#
```

show

Syntax:

show

Description:

To show port information.

Argument:

none

Possible value:

none

Example:

```
SNMP-24MGB(qos-ports)# show
Number of Classes:2
  2  Medium      1         3       Weighted Fair     2 /   2 /   2 /  2
  3  Low       1         0       Strict Priority   1 /   2 /   4 /  8
  4  Low       1         0       Strict Priority   1 /   2 /   4 /  8
  5  Low       1         0       Strict Priority   1 /   2 /   4 /  8
  6  Low       1         0       Strict Priority   1 /   2 /   4 /  8
  7  Low       1         0       Strict Priority   1 /   2 /   4 /  8
  8  Low       1         0       Strict Priority   1 /   2 /   4 /  8
  9  Low       1         0       Strict Priority   1 /   2 /   4 /  8
```

```
    10  Low       1         0       Strict Priority   1 /   2 /   4 /  8
```

<<qcl>>

set

Syntax:

set <dscp> < tos> < tagpriority> <qce type> <value> <class>

Description:

To add the QCE entry in the specific QCL

Argument:

<dscp>: dscp field, syntax 1,5-7, available from 0 to 63

< tos> : tos priority , available from 1 to 8

< tagpriority> : tag priority, available from 1 to 8

<qce type> : ethernet

<value> : 0xfff0

<class> : high

Possible value:

<dscp>: dscp field, syntax 1,5-7, available from 0 to 63

< tos> : tos priority , available from 1 to 8

< tagpriority> : tag priority, available from 1 to 8

<qce type> : ethernet

<value> : 0xfff0

<class> : high

Example:

```
SNMP-24MGB(qos-qcl)# set 2 0 3 ethernet 0xfff0 high
SNMP-24MGB(qos-qcl)# show 2 1

QCE Type:           Ethernet Type
Ethernet Type Value:0xfff0
Traffic Class:      High

SNMP-24MGB(qos-qcl)#
```

move

Syntax:

move <qcl> <qce> <new qce>

Description:

To move up the specific QCE entry in the specific QCL

Argument:

<qcl> : the qcl number, available from 1 to 24.

<qce> : the original qce number, available from 1 to 12.

<new qce> : the new qce number, available from 1 to 12.

Possible value:

<qcl> : available from 1 to 24.

<qce> : available from 1 to 12.

<new qce> : available from 1 to 12.

Example:

```
SNMP-24MGB(qos-qcl)# move 2 1 1
```

delete

Syntax:

delete <qcl> <qce range>

Description:

To delete the specific QCE entry in the specific QCL.

Argument:

<qcl> : the qcl number, available from 1 to 24.

<qce range> : 1,5-7, available from 1 to 12

Possible value:

<qcl> : available from 1 to 24.

<qce range> : available from 1 to 12

Example:

```
SNMP-24MGB(qos-qcl)# delete 2 1
```

<<rate>>

set

Syntax:

set <range> <policer enabled> <rate> <unit> <shaper enabled> <rate> <unit>

Description:

To set rate limit configuration

Argument:

<range syntax> : 1,5-7, available from 1 to 24

<policer enabled> : 1 means enable and 0 means disable

<rate>: allowed values are 500kbps-1Gkps

<unit>: 'k' means kbps and 'm' means mbps

<shaper enabled>: 1 means enable and 0 means disable

<rate>: allowed values are 500kbps-1Gkps

<unit>: 'k' means kbps and 'm' means mbps

Possible value:

range syntax: 1,5-7, available from 1 to 24

policer enabled: 1 means enable and 0 means disable

rate: allowed values are 500kbps-1Gkps

unit: 'k' means kbps and 'm' means mbps

shaper enabled: 1 means enable and 0 means disable

rate: allowed values are 500kbps-1Gkps

unit: 'k' means kbps and 'm' means mbps

Example:

```
SNMP-24MGB(qos-rate)# set 2 1 1000 m 1 1000 m
SNMP-24MGB(qos-rate)# show
  2        V        1000       Mbps        V        1000       Mbps
  3                  500       kbps                  500       kbps
  4                  500       kbps                  500       kbps
  5                  500       kbps                  500       kbps
  6                  500       kbps                  500       kbps
```

7	500	kbps	500	kbps
8	500	kbps	500	kbps
9	500	kbps	500	kbps
10	500	kbps	500	kbps

<< storm >>

set broadcast

Syntax:

set broadcast <status> <rate>

Description:

To set broadcast storm control configuration

Argument:

<status> : 1 means enable and 0 means disable

<rate> : 1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1k, 2k, 4k, 8k, 16k, 32k, 64k, 128k , 256k, 512k

Possible value:

<status> : 1 means enable and 0 means disable

<rate> : 1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1k, 2k, 4k, 8k, 16k, 32k, 64k, 128k , 256k, 512k

Example:

```
SNMP-24MGB(qos-storm)# set broadcast 1 512
SNMP-24MGB(qos-storm)# show

Frame Type     Status    Rate(Packet Per Second)
-----------------------------------------------
Flooded unicast          1
Multicast               1
Broadcast        V       512
```

set multicast

Syntax:

set multicast <status> <rate>

Description:

To set multicast storm control configuration

Argument:

<status> : 1 means enable and 0 means disable

<rate> : 1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1k, 2k, 4k, 8k, 16k, 32k, 64k, 128k , 256k, 512k

Possible value:

<status> : 1 means enable and 0 means disable

<rate> : 1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1k, 2k, 4k, 8k, 16k, 32k, 64k, 128k , 256k, 512k

Example:

```
SNMP-24MGB(qos-storm)# set multicast 1 64
SNMP-24MGB(qos-storm)# show

Frame Type     Status    Rate(Packet Per Second)
-----------------------------------------------
Flooded unicast          1
Multicast       V       64
Broadcast        V       512
```

set unicast

Syntax:

set unicast <status> <rate>

Description:

To set flooded unicast storm control configuration

Argument:

<status> : 1 means enable and 0 means disable

<rate> : 1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1k, 2k, 4k, 8k, 16k, 32k, 64k, 128k , 256k, 512k

Possible value:

<status> : 1 means enable and 0 means disable

<rate> : 1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1k, 2k, 4k, 8k, 16k, 32k, 64k, 128k , 256k, 512k

Example:

```
SNMP-24MGB(qos-storm)# set unicast 1 128
SNMP-24MGB(qos-storm)# show

Frame Type     Status    Rate(Packet Per Second)
-----------------------------------------------
Flooded unicast  V       128
Multicast       V       64
Broadcast        V       512
```

show

Syntax:

show

Description:

To show storm control configuration

Argument:

none

Possible value:

none

Example:

```
SNMP-24MGB(qos-storm)# show

Frame Type     Status    Rate(Packet Per Second)
-----------------------------------------------
Flooded unicast  V       128
Multicast       V       64
Broadcast        V       512
```

- **reboot**

reboot

Syntax:
reboot
Description:
To reboot the system.
Argument:
None.
Possible value:
None.
Example:

```
SNMP-24MGB# reboot
```

- **snmp**

disable

Syntax:
disable set-ability
disable snmp
Description:
The Disable here is used for the de-activation of snmp or set-community.
Argument:
None.
Possible value:
None.
Example:

```
SNMP-24MGB(snmp)# disable snmp
SNMP-24MGB(snmp)# disable set-ability
```

enable

Syntax:
enable set-ability
enable snmp
Description:
The Enable here is used for the activation snmp or set-community.
Argument:
None.
Possible value:
None.
Example:

```
SNMP-24MGB(snmp)# enable snmp
SNMP-24MGB(snmp)# enable set-ability
```

set

Syntax:
set get-community <community>
set set-community <community>
set trap <#> <ip> [port] [community]
Description:
The Set here is used for the setup of get-community, set-community, trap host ip, host port and trap-community.
Argument:
<#>: trap number
<ip>: ip address or domain name
<port>: trap port
<community>:trap community name
Possible value:
<#>: 1 to 6
<port>:1~65535
Example:

```
SNMP-24MGB(snmp)# set get-community public
SNMP-24MGB(snmp)# set set-community private
SNMP-24MGB(snmp)# set trap 1 192.168.1.1 162 public
```

show

Syntax:
show
Description:
The Show here is to display the configuration of SNMP.
Argument:
None.
Possible value:
None.
Example:

```
SNMP-24MGB(snmp)# show
SNMP         : Enable
Get Community: public
Set Community: private [Enable]
Trap Host 1 IP Address: 192.168.1.1 Port: 162 Community: public
Trap Host 2 IP Address: 0.0.0.0 Port: 162 Community: public
Trap Host 3 IP Address: 0.0.0.0 Port: 162 Community: public
Trap Host 4 IP Address: 0.0.0.0 Port: 162 Community: public
Trap Host 5 IP Address: 0.0.0.0 Port: 162 Community: public
Trap Host 6 IP Address: 0.0.0.0 Port: 162 Community: public
```

● stp

MCheck

Syntax:
MCheck <range>
Description:
To force the port to transmit RST BPDUs.
Argument:
<range>: syntax 1,5-7, available from 1 to 24
Possible value:
<range>: 1 to 24

Example:

```
SNMP-24MGB(stp)# Mcheck 1-8
```

disable

Syntax:

disable

Description:

To disable the STP function.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB(stp)# disable
```

enable

Syntax:

enable

Description:

To enable the STP function.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB(stp)# enable
```

set config

Syntax:

set config <Bridge Priority> <Hello Time> <Max. Age> <Forward Delay>

Description:

To set up the parameters of STP.

Argument:

<Bridge Priority>:priority must be a multiple of 4096, available from 0 to 61440.

<Hello Time>: available from 1 to 10.

<Max. Age>: available from 6 to 40.

<Forward Delay>: available from 4 to 30.

Note: 2*(Forward Delay -1) >= Max Age

Max Age >= 2*(Hello Time +1)

Possible value:

<Bridge Priority>: 0 to 61440

<Hello Time>: 1 to 10

<Max. Age>: 6 to 40

<Forward Delay>: 4 to 30

Example:

```
SNMP-24MGB(stp)# set config 61440 2 20 15
```

set port

Syntax:

set port <range> <path cost> <priority> <edge_port> <admin p2p>

Description:

To set up the port information of STP.

Argument:

<range>: syntax 1,5-7, available from 1 to 24

<path cost>: 0, 1-200000000. The value zero means auto status

<priority>: priority must be a multiple of 16, available from 0 to 240

<edge_port> : Admin Edge Port, <yes|no>

<admin p2p>: Admin point to point, <auto|true|false>

Possible value:

<range>:1 to 24
<path cost>: 0, 1-200000000
<priority>: 0 to 240
<edge_port>: yes / no
<admin p2p>: auto / true / false

Example:

```
SNMP-24MGB(stp)# set port 1-16 0 128 yes auto
```

set version

Syntax:
set version <stp|rstp>
Description:
To set up the version of STP.
Argument:
<stp|rstp>:stp / rstp
Possible value:
<stp|rstp>:stp / rstp
Example:

```
SNMP-24MGB(stp)# set version rstp
```

show config

Syntax:
show config
Description:
To display the configuration of STP.
Argument:
None.
Possible value:
None.

Example:

```
SNMP-24MGB(stp)# show config
STP State Configuration    :
Spanning Tree Protocol     : Enabled
Bridge Priority (0-61440)  : 61440
Hello Time (1-10 sec)      : 2
Max. Age (6-40 sec)        : 20
Forward Delay (4-30 sec)   : 15
Force Version              : RSTP
```

show port

Syntax:

show port

Description:

To display the port information of STP.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB# stp
SNMP-24MGB(stp)# show port
Port Port Status Path Cost Priority Admin Edge Port Admin Point To Point
==== =========== ========= ======== ================ ====================
  1  DISCARDING    2000000    128         No                Auto
  2  DISCARDING    2000000    128         No                Auto
  3  DISCARDING    2000000    128         No                Auto
  4  DISCARDING    2000000    128         No                Auto
  5  DISCARDING    2000000    128         No                Auto
  6  DISCARDING    2000000    128         No                Auto
  7  DISCARDING    2000000    128         No                Auto
  8  DISCARDING    2000000    128         No                Auto
```

```
 9  DISCARDING    2000000    128        No              Auto
10  DISCARDING    2000000    128        No              Auto
11  DISCARDING    2000000    128        No              Auto
12  DISCARDING    2000000    128        No              Auto
13  DISCARDING    2000000    128        No              Auto
14  DISCARDING    2000000    128        No              Auto
15  DISCARDING    2000000    128        No              Auto
16  DISCARDING    2000000    128        No              Auto
17  DISCARDING    2000000    128        No              Auto
18  DISCARDING    2000000    128        No              Auto
19  DISCARDING    2000000    128        No              Auto
20  DISCARDING    2000000    128        No              Auto
21  DISCARDING    2000000    128        No              Auto
22  DISCARDING    2000000    128        No              Auto
...(q to quit)

23  DISCARDING    2000000    128        No              Auto
24  DISCARDING    2000000    128        No              Auto
```

show status

Syntax:

show status

Description:

To display the status of STP.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB(stp)# show status
STP Status :
STP State                          : Enabled
```

```
Bridge ID                          : 00:40:C7:D8:09:1D
Bridge Priority                    : 61440
Designated Root                    : 00:40:C7:D8:09:1D
Designated Priority                : 61440
Root Port                          : 0
Root Path Cost                     : 0
Current Max. Age(sec)              : 20
Current Forward Delay(sec)         : 15
Hello Time(sec)                    : 2
STP Topology Change Count          : 0
Time Since Last Topology Change(sec) : 848
```

- **system**

set contact

Syntax:
set contact <contact string>
Description:
To set the contact description of the switch.
Argument:
<contact>:string length up to 40 characters.
Possible value:
<contact>: A, b, c, d, ... ,z and 1, 2, 3, …. etc.
Example:

```
SNMP-24MGB(system)# set contact Taipei
```

set device-name

Syntax:
set device-name <device-name string>
Description:
To set the device name description of the switch.
Argument:

<device-name>: string length up to 40 characters.
Possible value:
<device-name>: A, b, c, d, ... ,z and 1, 2, 3, …. etc.
Example:

```
SNMP-24MGB (system)# set device-name CR-2600
```

set location

Syntax:
set location <location string>
Description:
To set the location description of the switch.
Argument:
<location>: string length up to 40 characters.
Possible value:
<location>: A, b, c, d, ... ,z and 1, 2, 3, …. etc.
Example:

```
SNMP-24MGB(system)# set location Taipei
```

● traplog

clear

Syntax:
clear
Description:
To clear trap log.
Argument:
none
Possible value:
none
Example:

```
SNMP-24MGB(traplog)# clear
SNMP-24MGB(traplog)# show

 No            time                              desc
```

```
---- ------------------------- ----------------------------------
```

show

Syntax:
show
Description:
To display the trap log.
Argument:
None.
Possible value:
None.
Example:

```
SNMP-24MGB(tftp)# show
2 Mon Mar 17 15:18:38 2008gvrp mode> <qce type> .
      Dual Media Swapped [Port:1][SwapTo:TP]ge hostnamexit /   4  /  8
3 Mon Mar 17 15:18:38 2008nto igmp mode, available from
                                Link Up [Port:1]Enter into ip mode
6 Mon Mar 17 15:18:38 2008
           Dual Media Swapped [Port:5][SwapTo:TP]
7 Mon Mar 17 15:18:38 2008
                                Link Up [Port:5]
8 Mon Mar 17 15:18:48 2008
                                   Login [admin]
```

show

Syntax:
show
Description:
To display the basic information of the switch.
Argument:
None.
Possible value:
None.
Example:

```
SNMP-24MGB(system)# show
Model Name                    : SNMP-24MGB
System Description            : 24+8 Combo Pure Gigabit SNMP Managed Switch
Location                      :
Contact                       :
Device Name                   : SNMP-24MGB
System Up Time                : 0 Days 0 Hours 4 Mins 14 Secs
Current Time                  : Tue Jan 17 16:28:46 2006
BIOS Version                  : v1.05
Firmware Version              : v2.08
Hardware-Mechanical Version   : v1.01-v1.01
Serial Number                 : 030C02000003
Host IP Address               : 192.168.1.1
Host MAC Address              : 00-40-c7-e7-00-10
Device Port                   : UART * 1, TP * 22, Dual-Media Port(RJ45/SFP) * 2
RAM Size                      : 16 M
Flash Size                    : 2 M
```

- **time**

set daylightsaving

Syntax:
set daylightsaving <hr> <MM/DD/HH> <mm/dd/hh>
Description:
To set up the daylight saving.
Argument:
hr : daylight saving hour, range: -5 to +5
MM : daylight saving start Month (01-12)
DD : daylight saving start Day (01-31)
HH : daylight saving start Hour (00-23)
mm : daylight saving end Month (01-12)
dd : daylight saving end Day (01-31)
hh : daylight saving end Hour (00-23)
Possible value:
hr : -5 to +5

MM : (01-12)
DD : (01-31)
HH : (00-23)
mm : (01-12)
dd : (01-31)
hh : (00-23)

Example:

```
SNMP-24MGB(time)# set daylightsaving 3 10/12/01 11/12/01
Save Successfully
```

set manual

Syntax:
set manual <YYYY/MM/DD> <hh:mm:ss>
Description:
To set up the current time manually.
Argument:
YYYY : Year (2000-2036) MM : Month (01-12)
DD : Day (01-31) hh : Hour (00-23)
mm : Minute (00-59) ss : Second (00-59)
Possible value:
YYYY : (2000-2036) MM : (01-12)
DD : (01-31) hh : (00-23)
mm : (00-59) ss : (00-59)
Example:

```
SNMP-24MGB(time)# set manual 2004/12/23 16:18:00
```

set ntp

Syntax:
set ntp <ip> <timezone>
Description:
To set up the current time via NTP server.
Argument:
<ip>: ntp server ip address or domain name
<timezone>: time zone (GMT), range: -12 to +13
Possible value:

<timezone>: -12,-11…,0,1…,13

Example:

```
SNMP-24MGB(time)# set ntp clock.via.net 8
Synchronizing...(1)
Synchronization success
```

show

Syntax:

show

Description:

To show the time configuration, including “Current Time”, “NTP Server”,” Timezone”, ” Daylight Saving”,” Daylight Saving Start” and “Daylight Saving End”

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB(time)# show
Current Time              : Thu Thu 14 15:04:03 2005
NTP Server           : 209.81.9.7
Timezone             : GMT+8:00
Day light Saving          : 0 Hours
Day light Saving Start    : Mth: 1 Day: 1 Hour: 0
Day light Saving End      : Mth: 1 Day: 1 Hour: 0
SNMP-24MGB(time)#
```

● Trunk

del trunk

Syntax:

del trunk <port-range>

Description:

To delete the trunking port.

Argument:
<port-range>: port range, syntax 1,5-7, available from 1 to 24
Possible value:
<port-range>: 1 to 24
Example:

```
SNMP-24MGB(trunk)# del trunk 1
```

set priority

Syntax:
set priority <range>
Description:
To set up the LACP system priority.
Argument:
<range>: available from 1 to 65535.
Possible value:
<range>: 1 to 65535, default: 32768
Example:

```
SNMP-24MGB(trunk)# set priority 33333
```

set trunk

Syntax:
set trunk <port-range> <method> <group> <active LACP>
Description:
To set up the status of trunk, including the group number and mode of the trunk as well as LACP mode.
Argument:
<port-range> : port range, syntax 1,5-7, available from 1 to 24
<method>:
static : adopt the static link aggregation
lacp : adopt the dynamic link aggregation- link aggregation control protocol
<group>: 1-8.
<active LACP>:
active : set the LACP to active mode
passive : set the LACP to passive mode
Possible value:
<port-range> : 1 to 24

<method>: static / lacp
<group>: 1-8.
<active LACP>: active / passive
Example:

```
SNMP-24MGB(trunk)# set trunk 1-4 lacp 1 active
```

show aggtr-view

Syntax:
show aggtr-view
Description:
To display the aggregator list.
Argument:
None.
Possible value:
None.
Example:

```
SNMP-24MGB(trunk)# show aggtr-view
Aggregator  1) Method: None
                      Member Ports: 1
                      Ready Ports:1

Aggregator  2) Method: LACP
                      Member Ports: 2
                      Ready Ports:
                                 :                              :
```

show lacp-detail

Syntax:
show lacp-detail <aggtr>
Description:
To display the detailed information of the LACP trunk group.
Argument:
<aggtr>: aggregator, available from 1 to 24
Possible value:

<aggtr>: 1 to 24

Example:

```
SNMP-24MGB(trunk)# show lacp-detail 2
Aggregator 2 Information:
              Actor                              Partner
-------------------------------- --------------------------------
System Priority    MAC Address    System Priority    MAC Address
-------------- ----------------- -------------- -----------------
     32768      00-40-c7-e8-00-02      32768      00-00-00-00-00-00

 Port    Key      Trunk Status         Port              Key
------ -------- ---------------- -------------- -----------------
   2     257           ---              2                0
```

show lacp-priority

Syntax:

show lacp-priority

Description:

To display the value of LACP Priority.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB(trunk)# show lacp-priority
LACP System Priority : 32768
```

show status

Syntax:

show status

Description:

To display the aggregator status and the settings of each port.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB(trunk)# show status
          Trunk Port Setting            Trunk Port Status
------------------------------------ ---------------------
 port   Method   Group   Active LACP   Aggtregator   Status
====== ======== ======= ============= ============= ========
   1     None      0       Active           1         Ready
   2     LACP      1       Active           2          ---
   3     LACP      1       Active           3          ---
   4     LACP      1       Active           4          ---
   5     LACP      1       Active           5          ---
   6     LACP      1       Active           6          ---
   7     LACP      1       Active           7          ---
                                                      :
  19     None      0       Active          19          ---
  20     None      0       Active          20          ---
  21     None      0       Active          21          ---
  22     None      0       Active          22          ---
  23     None      0       Active          23          ---
  24     None      0       Active          24          ---
```

- **vlan**

del port-group

Syntax:

del port-group <name>

Description:

To delete the port-based vlan group.

Argument:

<name>: which vlan group you want to delete.

Possible value:

<name>: port-vlan name

Example:

```
SNMP-24MGB(vlan)# del port-group VLAN-2
```

del tag-group

Syntax:

del tag-group <vid>

Description:

To delete the tag-based vlan group.

Argument:

<vid>: which vlan group you want to delete, available from 1 to 4094

Possible value:

<vid>: 1 to 4094

Example:

```
SNMP-24MGB(vlan)# del tag-group 2
```

disable drop-untag

Syntax:

disable drop-untag <range>

Description:

Don't drop the untagged frames.

Argument:

<range> : which port(s) you want to set, syntax 1,5-7, available from 1 to 24

Possible value:

<range>: 1 to 24

Example:

```
SNMP-24MGB(vlan)# disable drop-untag 5-10
```

disable sym-vlan

Syntax:

disable sym-vlan <range>

Description:

To drop frames from the non-member port.

Argument:

<range>: which port(s) you want to set, syntax 1,5-7, available from 1 to 24

Possible value:

<range>: 1 to 24

Example:

```
SNMP-24MGB(vlan)# disable sym-vlan 5-10
```

enable drop-untag

Syntax:

enable drop-untag <range>

Description:

To drop the untagged frames.

Argument:

<range>: which port(s) you want to set, syntax 1,5-7, available from 1 to 24

Possible value:

<range>: 1 to 24

Example:

```
SNMP-24MGB(vlan)# enable drop-untag 5-10
```

enable sym-vlan

Syntax:

enable sym-vlan <range>

Description:

To drop frames from the non-member port.

Argument:

<range> : which port(s) you want to set, syntax 1,5-7, available from 1 to 24

Possible value:

<range>: 1 to 24

Example:

```
SNMP-24MGB(vlan)# enable sym-vlan 5-10
```

set mode

Syntax:

set mode < port | tag > [up-link]

Description:

To set switch VLAN mode, including port-based and tag-based modes.

Argument:

<tag>: set tag-based vlan

<port>: set port-based vlan

Possible value:

< port | tag >: port,tag

Example:

```
SNMP-24MGB(vlan)# set mode
Usage: set mode <port|tag>
tag: set tag-based vlan
port: set port-based vlan
SNMP-24MGB(vlan)#
```

set double-tag

Syntax:

set double-tag <range> <0|1|2>

Description:

To set double-tag per port and enable Q-in-Q VLAN function on switch.

Argument:

<range >: 1,5-7, available from 1 to 24

0: disable

1: service provider port

2: customer port

Possible value:

<range>: 1 to 24

Example:

```
SNMP-24MGB(vlan)#set  double-tag  3 1
SNMP-24MGB(vlan)#
```

set port-group

Syntax:

set port-group <name> <range>

Description:

To add or edit a port-based VLAN group.

Argument:

<name>: port-vlan name

<range>: syntax 1,5-7, available from 1 to 24

Possible value:

<range>: 1 to 24

Example:

```
SNMP-24MGB(vlan)# set port-group VLAN-1 2-5,6,15-13
```

set port-role

Syntax:

set port-role <range> <access|trunk|hybrid> [vid]

Description:

To set egress rule: configure the port roles.

Argument:

<range> :which port(s) you want to set, syntax 1,5-7, available from 1 to 24
<access>: Do not tag frames

<trunk>: Tag all frames

<hybrid>: Tag all frames except a specific VID

<vid>: untag-vid for hybrid port

Possible value:

<range>: 1 to 24

<vid>: 1 to 4094

Example:

```
SNMP-24MGB(vlan)# set port-role 5 hybrid 6
```

set pvid

Syntax:

set pvid <range> <pvid>

Description:

To set the pvid of vlan.

Argument:

<range>: which port(s) you want to set PVID(s), syntax 1,5-7, available from 1 to 24

<pvid>: which PVID(s) you want to set, available from 1 to 4094

Possible value:

<range>: 1 to 24

<pvid>: 1 to 4094

Example:

```
SNMP-24MGB(vlan)# set pvid 3,5,6-8 5
```

set tag-group

Syntax:

set tag-group <vid> <name> <range> <#>

Description:

To add or edit the tag-based vlan group.

Argument:

<vid>: vlan ID, range from 1 to 4094

<name>: tag-vlan name

<range>: vlan group members, syntax 1,5-7, available from 1 to 24

<#>: sym/asym vlan setting. 1: symmetric vlan, 0: asymmetric vlan

Possible value:

<vid>: 1 to 4094

<range>: 1 to 24

<#>: 0 or 1

Example:

```
SNMP-24MGB(vlan)# set tag-group 2 VLAN-2 2-5,6,15-13 0
```

show group

Syntax:

show group

Description:

To display the vlan mode and vlan group.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB(vlan)# show group
Vlan mode is double-tag.

1)  Vlan Name : default
    Vlan ID   : 1
    Sym-vlan  : Disable
    Member    : 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

2)  Vlan Name : VLAN-2
```

```
Vlan ID   : 2
Sym-vlan  : Disable
Member    : 2 3 4 5 6 13 14 15
```

show port

Syntax:

show port

Description:

To display pvid, ingress/egress rule.

Argument:

None.

Possible value:

None.

Example:

```
SNMP-24MGB(vlan)# show pvid
 Port   PVID    Rule1     Rule2    Port Rule   Untag Vid
------ ------ --------- --------- ----------- -----------
   1       1   Disable   Disable     Access         -
   2       1   Disable   Disable     Access         -
   3       5   Disable   Disable     Access         -
   4       1   Disable   Disable     Access         -
   5       5   Enable    Disable     Hybrid         6
   6       5   Enable    Disable     Access         -
   7       5   Enable    Disable     Access         -
   8       5   Enable    Disable     Access         -
   9       1   Enable    Disable     Access         -
  10       1   Enable    Disable     Access         -
  11       1   Disable   Disable     Access         -
                              :
                                                    :
  23       1   Disable   Disable     Access         -
  24       1   Disable   Disable     Access         -
```

6 Troubleshooting

This section is intended to help you solve the most common problems on the SNMP-24MGB.

6.1 Incorrect connections

The switch port can auto detect straight or crossover cable when you link switch with other Ethernet device. For the RJ-45 connector should use correct UTP or STP cable, 10/100Mbps port use 2 pairs twisted cable and Gigabit 1000T port use 4 pairs twisted cable. If the RJ-45 connector is not correct pin on right position then the link will fail. For fiber connection, please notice that fiber cable mode and fiber module should be match.

■ Faulty or loose cables

Look for loose or obviously faulty connections. If they appear to be OK, make sure the connections are snug. IF that does not correct the problem, try a different cable.

■ Non-standard cables

Non-standard and miss-wired cables may cause numerous network collisions and other network problem, and can seriously impair network performance. A category 5-cable tester is a recommended tool for every 100Base-T network installation.

■ Improper Network Topologies

It is important to make sure that you have a valid network topology. Common topology faults include excessive cable length and too many repeaters (hubs) between end nodes. In addition, you should make sure that your network topology contains no data path loops. Between any two ends nodes, there should be only one active cabling path at any time. Data path loops will cause broadcast storms that will severely impact your network performance.

6.2 Diagnosing LED Indicators

The SNMP-24MGB can be easily monitored through panel indicators to assist in identifying problems, which describes common problems you may encounter and where you can find possible solutions. Please refer to Chapter 2.2 for detailed information.

If the power indicator does turn on when the power cord is plugged in, you may have a problem with power outlet, or power cord. However, if the Switch powers off after running for a while check for loose power connections, power losses or surges at power outlet. If you still cannot resolve the problem, contact your local dealer for assistance.

6.3 Cabling

RJ-45 ports: use unshielded twisted-pair (UTP) or shield twisted-pair (STP) cable for RJ-45 connections: 100Ω Category 3, 4 or 5 cable for 10Mbps connections or 100Ω Category 5 cable for 100Mbps connections. Also be sure that the length of any twisted-pair connection does not exceed 100 meters (328 feet). Gigabit port should use Cat-5 or cat-5e cable for 1000Mbps connections. The length does not exceed 100 meters.

7 Specifications

This section provides the specifications of SNMP-24MGB, and the following table lists these specifications.

Standard	● IEEE802.3 10BASE-T ● IEEE802.3u 100BASE-TX/100BASE-FX ● IEEE802.3z Gigabit SX/LX ● IEEE802.3ab Gigabit 1000T ● IEEE802.3x Flow Control and Back pressure ● IEEE802.3ad Port trunk with LACP ● IEEE802.1d Spanning tree protocol ● IEEE802.1p Class of service ● IEEE802.1Q VLAN Tagging ● IEEE802.1w Rapid Spanning tree protocol
Interface	● 8 x 10/100/1000Mbps/Mini-GBIC ports, Auto-negotiation, Auto-MDIX ports ● 16 x Mini-GBIC ports
Switch architecture	● Store and forward switch architecture. ● Back-plane up to 48Gbps
MAC address	● 8K
Memory	● 1392 KB for packet buffer
LED	● System power ● 10/100/1000M TP Port 1 to 8: LINK/ACT, 10/100/1000Mbps ● 1000M SFP Fiber Port 1 to 24: SFP(LINK/ACT)
Management	● Telnet/ Web/ SNMP v1,v2c management, RS-232 console management

	● RFC Standard ■ SNMP agent : MIB-2 (RFC 1213) ■ Bridge MIB (RFC 1493) ■ RMON MIB (RFC 1757)-statistics ■ Ethernet-like MIB (RFC 1643) ■ Enterprise MIB ● SNMP Trap ■ Trap station up to 6. ● TFTP and Console firmware upgradeable ● Port Trunk ■ Support IEEE802.3ad with LACP function. ■ Up to 12 trunk groups and group member up to 16. ● Supports IEEE802.1d STP & IEEE802.1w RSTP ● VLAN ■ SVL/IVL configuration to meet your VLAN requirement ■ Port-base VLAN ■ IEEE 802.1Q Tag-base VLAN, 4094 max, up to 4094 active VLANs including static and dynamic entry ■ Tag-base VLAN supports egress/ingress packet filter ■ Q-in-Q VLAN for enabling subscriber aggregation ■ Management VLAN for managed policy ■ GVRP/GARP ● QoS policy: ■ Supports QCL for L4 TCP/UDP port and ToS classification ■ Supports 802.1p QoS with 4 level priority queue ■ Supports priority in a Q-in-Q tag ● Supports IGMP snooping and IGMP proxy ● Supports IP stacking, up to 16 units ● Limit number of MAC addresses learned per port static MAC addresses stay in the filtering table

	● Supports Port Mirroring ● Supports Flooded Unicast / Multicast / Broadcast Storm Control ● Supports ingress and egress per port bandwidth control, per level 500 Kbps ~ 1000000 Kbps or 1 Mbps ~ 1000 Mbps ● Supports 802.1x access control for port-based authentication ● Support Access Control List ● Support IP-MAC-port binding ● DHCP relay agent (option 82)
MTBF	● 63759 (hr)
Temperature	● Operating: 0 to 40°C ● Storage: -10 to 70°C
Humidity	● Operating: 10% ~ 90% ● Storage: 5% ~ 90%
Power	● 100~240VAC 50/60Hz (maximum) ● Power consumption 40Watts
Produce Weight (g)	● 2900 g
Dimensions	● 442 x 209 x 44 mm

8 Network Glossary

The network glossary contains explanation or information about common terms used in wireless networking products. Some of information in this glossary might be outdated, please use with caution.

100Base-FX

The IEEE standard defines how to transmit Fast Ethernet 100Mbps data using multi-mode or single fiber optic cable

100Base-TX

Also known as 802.3u. The IEEE standard defines how to transmit Fast Ethernet 100Mbps using Cat.5 UTP/STP cable. The 100Base-TX standard is backward compatible with the 10Mbps 10-BaseT standard.

1000Base-SX

Also known as 802.3z. The IEEE standard defines how to transmit gigabit Ethernet data using multi-mode fiber optic cables. This standard allows transmission distance of 550 meter, which is more than 5 times longer than the 100-meter limitation of 1000Base-T. The 1000Base-SX cannot run in 100Mbps mode.

1000Base-LX

The IEEE standard defines how to transmit gigabit Ethernet data using single mode fiber optic cables. This standard allows transmission distance of 5km or more using single mode fiber. The 1000Base-LX cannot run in 100Mbps mode.

1000Base-T

Also known 802.3ab standard. The IEEE standard defines how to transmit Gigabit data through the use of Cat.5 UTP/STP cable. The 1000Base-T can run in 10/100/1000Mbps

speed, and is backward compatible with 10/100Base-TX standard.

802.1d STP

Spanning Tree Protocol. It is an algorithm to prevent network from loop topology. Spanning tree allows a network design to include spare (redundant) links to provide automatic backup paths if an active link fails, without the danger of bridge loops, or the need for manual enabling/disabling of these backup links. Bridge loop must be avoided because of flooding issue in the network.

802.1Q Tag VLAN

In 802.1Q VLAN, the VLAN information is written into the Ethernet packet itself. Each packet carries a VLAN ID(called Tag) as it traveled across the network. Therefore, the VLAN configuration can be configured across multiple switches. In 802.1Q spec, possible 4096 VLAN ID can be created. Although for some devices, they can only view in frames of 256 ID at a time.

802.1x

802.1x is a security standard for wired and wireless LANs. In the 802.1x parlance, there are usually supplicants (client), authenticator (switch or AP), and authentication server (radius server) in the network. When a supplicants request a service, the authenticator will pass the request and wait for the authentication server to grant access and register accounting. The 802.1x is the most widely used method of authentication by WISP.

802.1w

Rapid Spanning Tree Protocol. It is a refinement of STP, which provides faster spanning tree convergence after a topology change. While STP can take 30 or 50 seconds to respond to a topology change, RSTP is typically able to respond to changes within a second.

DHCP

Dynamic Hosting Configuration Protocol. A protocol that enables a server to dynamically assign IP addresses. When DHCP is used, whenever a computer logs onto the network, it automatically gets an IP address assigned by DHCP server. A DHCP server can either be a designed PC on the network or another network device, such as a router.

Firmware

The program that runs inside embedded device such as AP or Switch. Many network devices are firmware upgradeable through web interface or utility program.

FTP

File Transfer Protocol. A standard protocol for sending files between computer over a TCP/IP network and the internet.

IGMP Snooping

Internet Group Management Protocol. It is a Layer 3 protocol to report IP multicast memberships to neighboring multicast switches and routers. IGMP Snooping is a feature that allows an Ethernet Switch to “listen in” on the IGMP conversation between hosts and routers. When IGMP snooping is enabled in a switch, it prevent hosts on a local network from receiving traffic for a multicast group they have not explicitly joined. It provides switches with a mechanism to prune multicast traffic from links that do not contain a multicast listener (IGMP client).

IP Address

IP (Internet Protocol) is a Layer 3 network protocol that is the basis of all Internet communication. An IP address is 32-bit number that identifies each sender or receiver of information that is sent across the Internet. An IP address has two parts: an identifier of a particular network on the Internet and an identifier of the particular device (which can be a server or a workstation) within that network. The new IPv6 specification supports 128-bit IP address format.

LACP (802.3ad) Trunking

Link Aggregation Control Protocol. It is protocol defines how to combine the several Ethernet ports into one high-bandwidth port to increase the transmission speed. It is also known as port trunking. Both devices must set the trunking feature to work.

MAC

Media Access Control. MAC address provides Layer-2 identification for network devices. Each Ethernet device has its own unique address. The first 6 digits are unique for each device manufacturers. When a network device has MAC access control feature, only the devices with the approved MAC address can connect with the network.

Mbps

Megabits Per Second. One million bits per second; a unit of measurement for data transmission.

MiniGBIC

A type of Gigabit Ethernet module interface that uses SFP (Small Form-factor Pluggable) transceiver. The MiniGBIC equipped with Switches typically comes with the MiniGBIC slot for optional SFP optical transceiver.

Packet

A unit of data sent over a network.

Rate Control

It is an Ethernet switch's function to control the upstream and downstream speed of an individual port. Rate control management use "Flow Control" to limit the speed of a port. Therefore, the Ethernet adapter must also have the flow control enabled. One way to force the adapter's flow control on is to set a port to half-duplex mode.

SNMP

Simple Network Management Protocol. A set of protocols for managing complex networks. The SNMP network contains three key elements: managed devices, agents, and network-management system (NMS). Managed devices are network devices that contain SNMP agents. SNMP agents are programs that reside SNMP capable device's firmware to provide SNMP configuration service. The NMS typically is PC-based software that can monitor and control managed devices remotely.

Subnet Mask

An address code mask that determines the size of the network. An IP subnet are determined by performing a BIT-wise AND operation between the IP address and the subnet mask. By changing the subnet mask, you can change the scope and size of a network.

TFTP

Trivial File transfer Protocol. A file transfer protocol, with the functionality of a very basic form of FTP. It is used to transfer small amounts of data between hosts on a network, such as Switch firmware.